SPECIFICATIONS

Mechanical

Durability: *100 Cycles*
Insertion/Extraction force: *40N Max./11.5N Max*


Electrical

Voltage Rating: *120V*
Current Rating: *0.5A*
Dielectric Withstanding Voltage: *300V*
Insulation Resistance: *1000MΩ min*


Physical

Housing& I/M plastic part: *LCP, UL 94-0, Black*
Contact: *Phosphorous Bronze*
Light pipe *:Polycarbonite,UL 94-0,Black*
Cage*: Nickel silver*
Plating: *Contact:30μ' Min Gold Plating*
Operating Temperature: *-55℃ to + 105℃*

3S Series,
SFP PLUS 2X2 CAGE&CONN

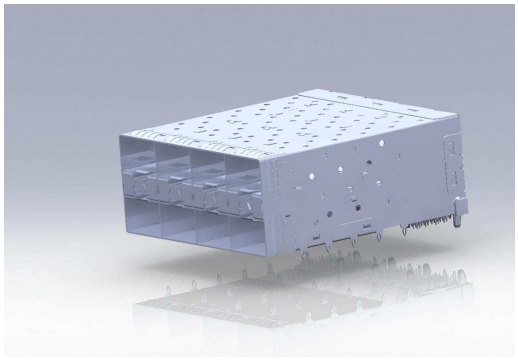

DRAWING

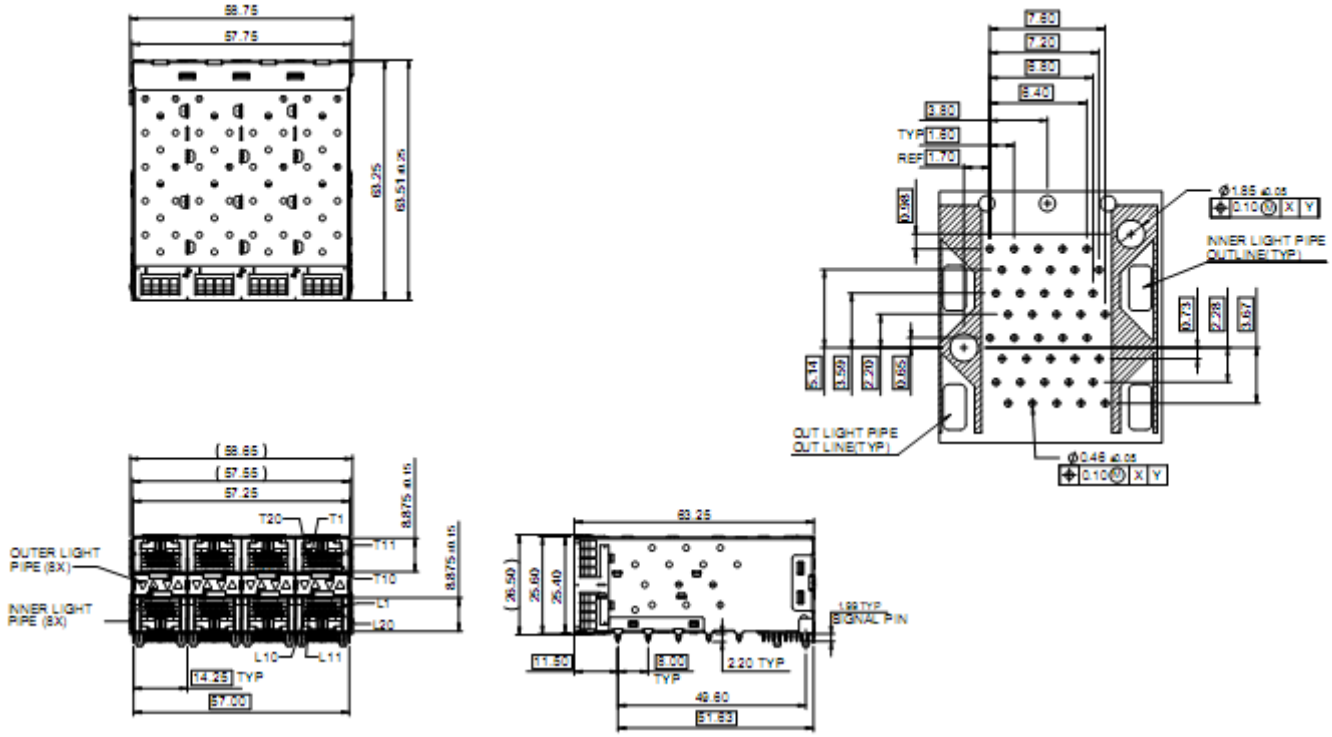

ORDERING INFORMATION

PART NO:

PART LIST

3S1020F*-*F4-4*

- PLATING THICKNESS OF MATING AREA
  3: 30 u" GOLD
  7: 15 u" GOLD
- METAL CAGE
  B:WITH INNER LIGHT PIPE
- LEAD FREE CODE:
  NONE:TIN/LEAD
  F:LEAD FREE
- PACKAGE:
  4: TRAY

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.