

SPECIFICATIONS

Mechanical

Durability: 30 Cycles min.

Socket Retention Force: 65g/Pos. min.

Electrical

Contact Resistance: $35m\Omega$ max. Dielectric Withstanding Voltage: 500V Insulation Resistance: $800M\Omega$ min.

Physical

Cover: Thermoplastic, UL 94V-0 rated, White Color **Base:** Thermoplastic, UL 94V-0 rated, Black Color

Cam: Stainless Steel Base Plate: Stainless Steel Cover Plate: Stainless Steel

Cap: Thermoplastic, UL 94V-0 rated, Black Color

Contact: Copper Alloy Base Ring: Stainless Steel


Plating: See "ORDERING INFORMATION"
Operating Temperature: 0 ℃ to +105 ℃

BGA 350SOCKET

BGA Series 350Z CPU Socket Vertical, SMT Type 1.27 mm Pitch 350 Pos.



DRAWING

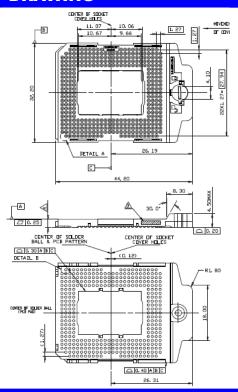

ORDERING INFORMATION

