

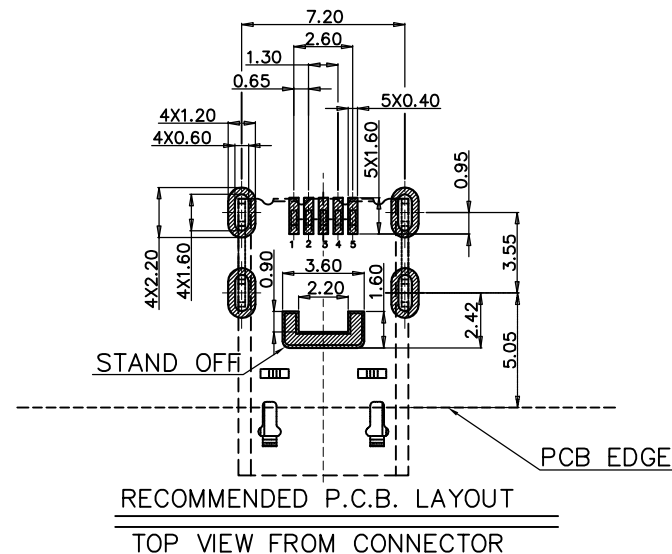
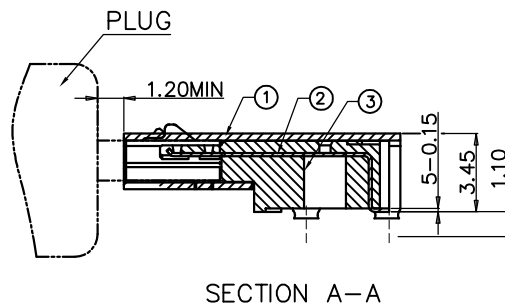
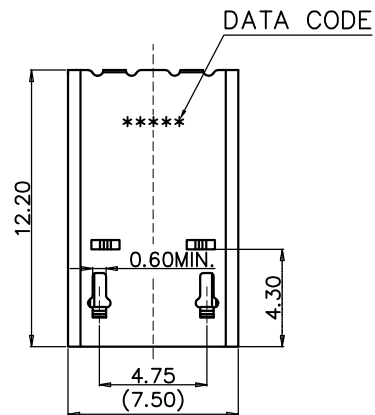




REV.	ECN. NO.	APPD.
X1	BS-13-117462	Shih-wei Hsiao

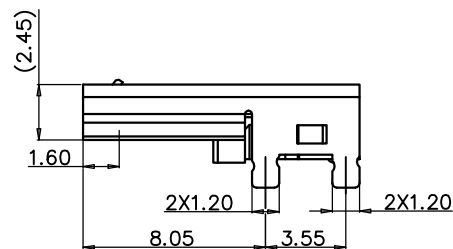


CONTACT NO.	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND

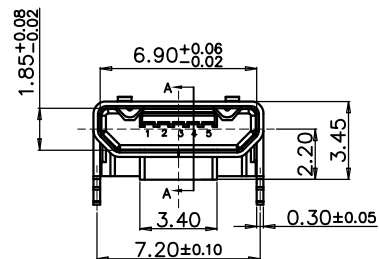

- NOTES:
1. PCB UNSPECIFIED TOLERANCE: .XX $\pm$ 0.05
 2. RECOMMENDED PCB. THICKNESS: 1.00mm.

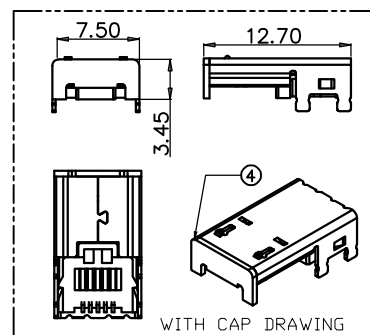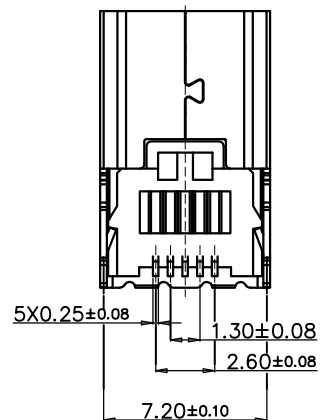

④	CAP	1	LCP	COLOR: BLACK, FOR UN1511*—N22SA1—9H			
③	HOUSING	1	LCP	COLOR: BLACK			
②	CONTACT	5	COPPER ALLOY	1~3u" GOLD PLATING ON CONTACT TAIL; 30u" MIN NICKEL UNDER PLATING;			
①	SHELL	1	STAINLESS STEEL	30~50u" NICKEL OVERALL PLATING;			
ITEM	DESCRIPTION	QTY	MATERIAL	REMARK			
X. ± 0.30	X. ° ±	UNITS	mm	NAME(INTENDED USE)			
.X ± 0.25	.X ° ±		MAT'L	MICRO USB CONNECTOR	FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.		
.XX ± 0.15	.XX ° ±	PART NO.(INTENDED USE)		TITLE:			
.XXX ±	.XXX ° ±	FINISH	UN15111—N22A11—9H	CUSTOMER DRAWING			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.			APPD: Shih—wei Hsiao	DWG NO: 327—0000—N22A11			
			CHKD: Freeman		SCALE	SHEET	REV.
			DR: X.D.Wang 10/30'13		N/A	1/3	X1

PRODUCT NO.

UN15111- N22A11 -9H

H: HVLAGEN FREE CODE

PACKAGING CODE:
9=WITH CAP

EXTENSION CODE.

CONTACT AREA PLATING:
C: 30u"Pd/Ni+1~3u"GOLD PLATING
1: 1~3u"GOLD PLATING

1=B TYPE
1=5 POS

5=SMT
1=FEMALE

MICRO USB SERIES PREFIX

NOTES:

1.DIMENSIONS SHALL BE INTERPRETED PER ASME Y14.5M-2009.

2.ELECTRICAL CHARACTERISTICS:

2-1.CORRENT RATING:

1.8 AMPERE FOR PIN No. 1,5.

0.5 AMPERE FOR PIN No. 2,3,4.

2-2.CONTACT RESISTANCE: 30 MILLIOHMS MAX.FOR INITIAL.

2-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V DC.

2-4.INSULATION RESISTANCE: 1000 Megaohms Min.

3.MECHANICAL CHARACTERISTICS:

3-1.TOTAL MATING FORCE: 35N MAX.


3-2.TOTAL UNMATING FORCE: 8N MIN.

3-3.DURABILITY: 10000 MATING CYCLES Min.

3-4.OPERATION TEMPERATURE RANGE: -30°C TO +85°C.

4.THE CONNECTOR SHOULD COMPLIANT RoHS REQUIREMENTS.

5.PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY.

X. ± 0.30	X. ° ±	UNITS mm	NAME(INTENDED USE)	FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.		
.X ± 0.25	.X ° ±		MICRO USB CONNECTOR			
.XX ± 0.15	.XX ° ±	MAT'L	PART NO.(INTENDED USE)	TITLE:		
.XXX ±	.XXX ° ±		UN15111-N22A11-9H	CUSTOMER DRAWING		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.		FINISH	APPD: Shih-wei Hsiao	DWG NO.: 327-0000-N22A11		
		Q'TY	CHKD: Freeman			
			DR: X.D.Wang 10/30'13			
				SCALE	SHEET	REV.
				N/A	2/3	X1

