

SPECIFICATIONS

Mechanical

Mating Force: 3.50Kg (7.71Lb) max.
Unmating Force: 1.00Kg (2.20Lb) min.
Durability: 1500 Cycles


Electrical

Current Rating: 1.5A
Contact Resistance: 30mΩ max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 1000MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated
Contact and Shell: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55 to +85

UB Series
Right Angle, T/H
4 Pos.



DRAWING

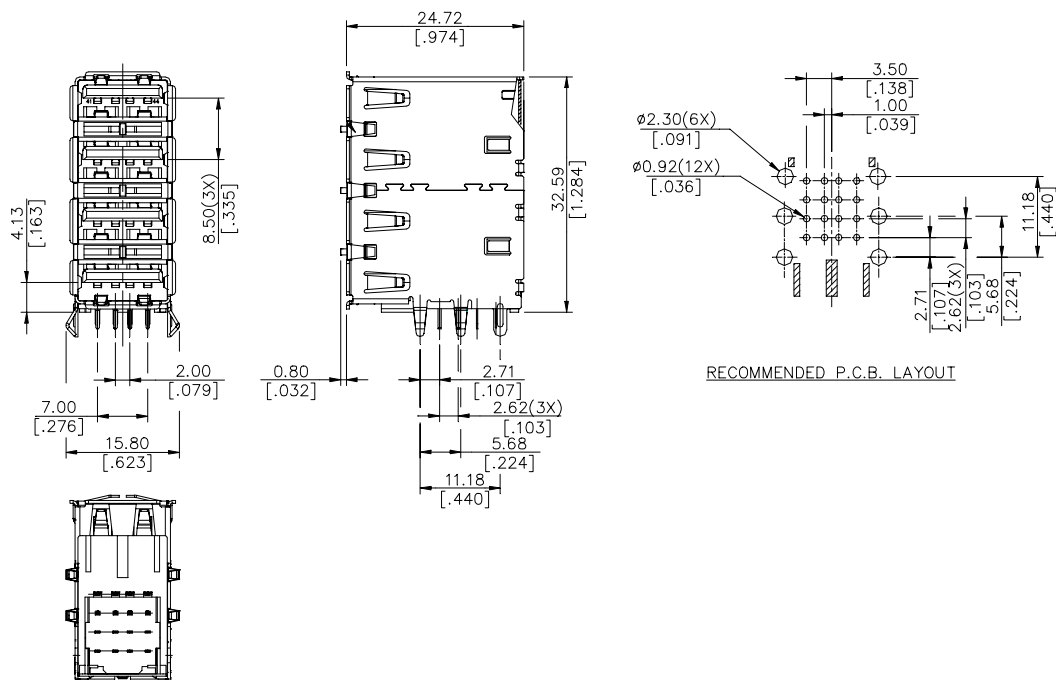

ORDERING INFORMATION

PRODUCT NO.: UB 1 1 1 2 *-Q8-4 F

- USB Series
- USB A Type
- Termination Type
 - 0= Straight
 - 1= Right Angle
 - 3= Up Right
 - 5= SMT
- Contact Design Type
 - 1= Female
- No. of Pos
 - 1= 4 Pos
- Profile Height
 - 2= 4.13 [.163]
 - 3= 6.50 [.256]
- Lead Free Type
 - F= Lead Free
- Package Code
 - 4= Soft Tray
- Modification Code
- Contact Area Plating
 - 3= 30u" Gold
 - C= 30u" Pd/Ni+Gold Flash

UB1112C-Q8-4F	30u" Pd/Ni+GOLD FLASH AT CONTACT AREA
UB11123-Q8-4F	30u" GOLD PLATED AT CONTACT AREA
P/N	PLATING