

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.21Kg(0.44Lb)min.
Durability: 100 Cycles

Electrical


Voltage Rating: 120V
Current Rating: 0.5A
Contact Resistance: 35mΩ max.
Dielectrical Withstanding Voltage: 300V
Insulation Resistance: 500MΩ min.

Physical



Housing: LCP, UL 94-0, Black
Contact: Phosphor Bronze
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55°C to +85°C

SFP CONNECTOR+CAGE

**3S Series,
 SFP(Small Form-Factor
 Pluggable) stacked type,
 2x4, 0.8mm pitch**

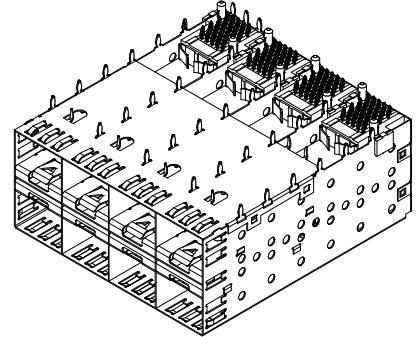

DRAWING

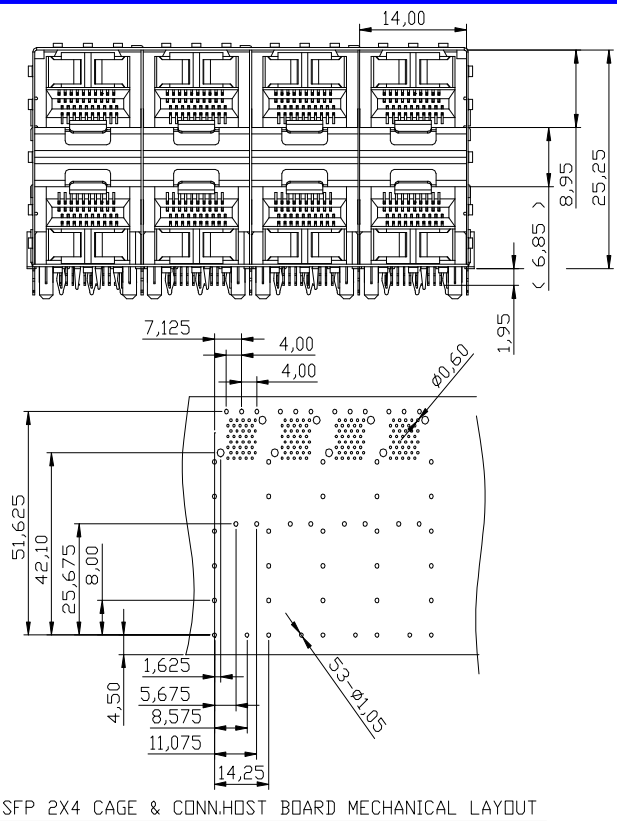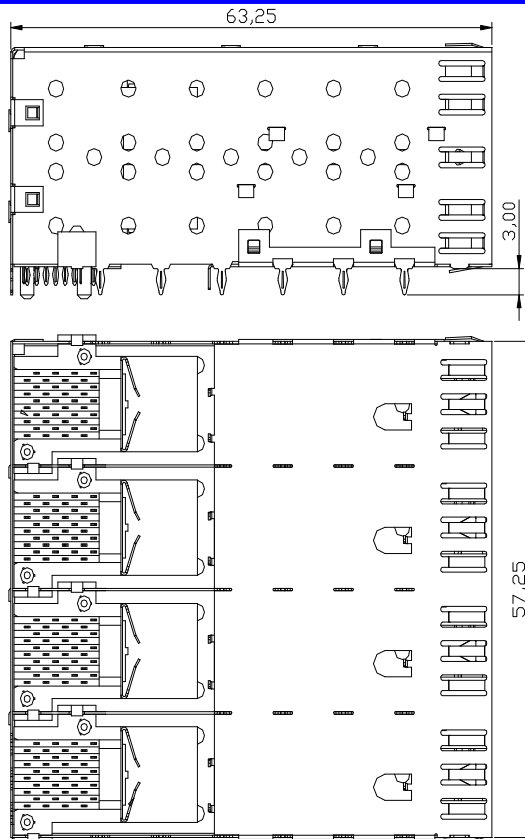

ORDERING INFORMATION

PRODUCT NO:

3S1020B 3 - A64 - * *

