

SPECIFICATIONS

Mechanical

Mating Force: 3.50Kg (7.71Lb) max. Unmating Force: 1.00Kg (2.20Lb) min. Durability: 1500 Cycles

Electrical

Current Rating: 1.5A Contact Resistance: $30m\Omega$ max. Dielectric Withstanding Voltage: 500V AC/1min min. Insulation Resistance: $1000M\Omega$ min.

Physical

Housing: Thermoplastic, UL 94V-0 rated Contact: Copper alloy Shell: Steel Plating: See "ORDERING INFORMATION" Operating Temperature: -55 ° to +85 °

[474]

2.04

11.00 L.4331


[.224]

5,69

DRAWING

16.50 [.650]

Щ

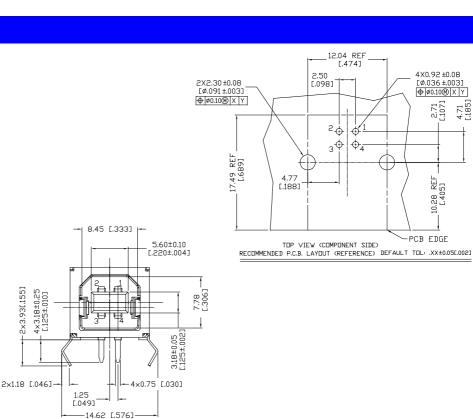


ORDERING INFORMATION

1

10.28 ±0.30 [.405 ±.012]

2.710.1073

4.71[.185]

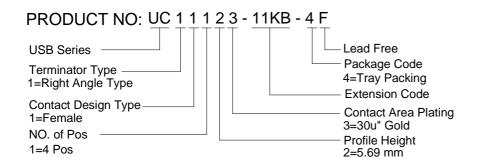

USB Connector

UC Series T/H Type 4 Pos.

