

SPECIFICATIONS

Mechanical

Durability: 100 Cycles

Insertion/Extraction force: 40N Max./11.5N max

Electrical

Voltage Rating: 120 volts r,m,s

Current Rating: 0.5A

Insulation Resistance: 1000 M-ohms max

Physical

Connector: Housing:LCP

Contact:Copper Alloy I/M plastic part: PBT


Kick out spring: Stainless steel Plating: 30u" on mating area

Cage: Copper Alloy, Nickle plating overall Operating Temoerature: -55°C to + 85°C


SFP CAGE

3S Series,

SFP (Small Form-Factor Pluggable) stacked type, 2x1, 0.8mm pitch



DRAWING

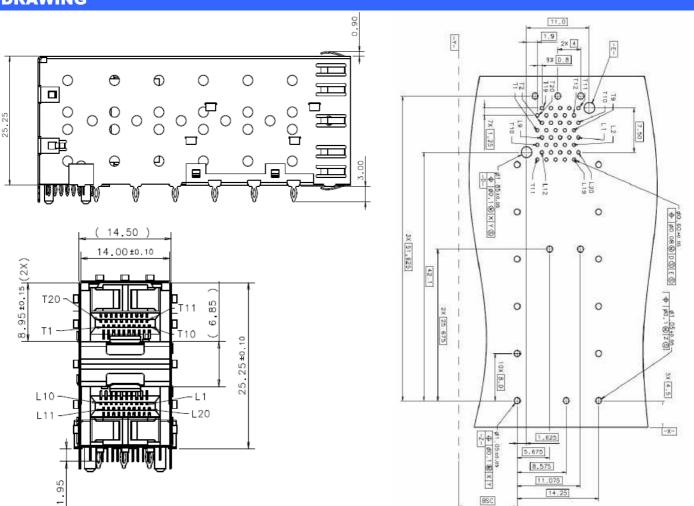

ORDERING INFORMATION

PART NUMBER

