

SPECIFICATIONS

Mechanical

Contact Retention Force: 200gf mini
Durability: 250 mating Cycles

Electrical

Voltage Rating: 30 volts AC (RMS)/DC max
Current Rating: 0.5A
Dielectrical Withstanding Voltage: A300 VAC
Insulation Resistance: 500 M-ohms min


Physical

Housing: LCP
Contact: Copper Alloy
Plating: See "ORDERING INFORMATION" below
Operating Temperature: -40°C to + 85°C

QSFP+ Connector 25G

3S Series,
QSFP+ Connector, 38pos
standard type, 0.8m pitch

DRAWING

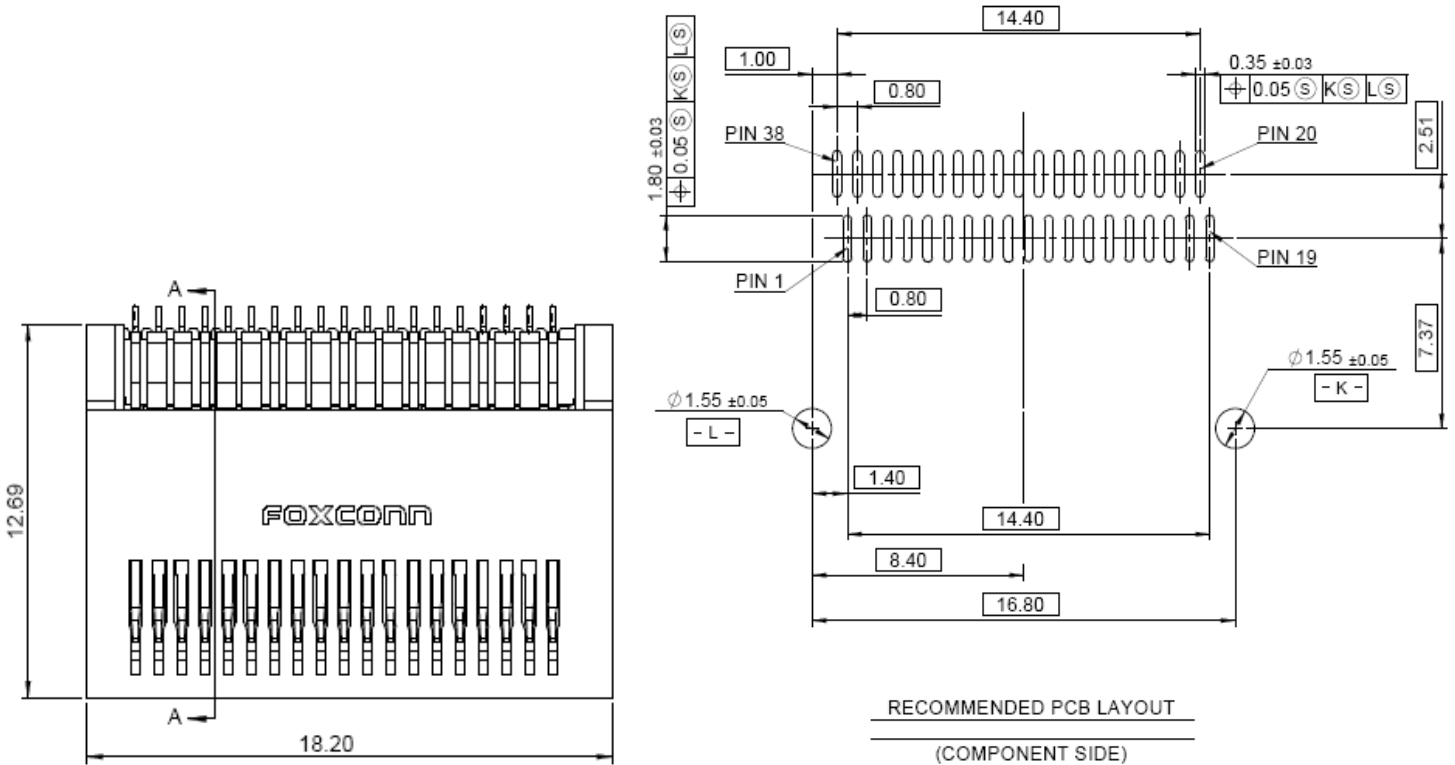

ORDERING INFORMATION

PART NUMBER

3 S 1 0 38 N * - 0 1 - 7 *

N=QSFP+ Connector 25Gbps

Contact area plating
3= 30u" gold plating
7= 15u" gold plating

RoHS
F= Lead free, Satin tin
M= Lead free, Matte tin