


CLP0412 Open Frame Power Supply

90 - 265Vac Input; 12Vdc Output; 450W Output Power

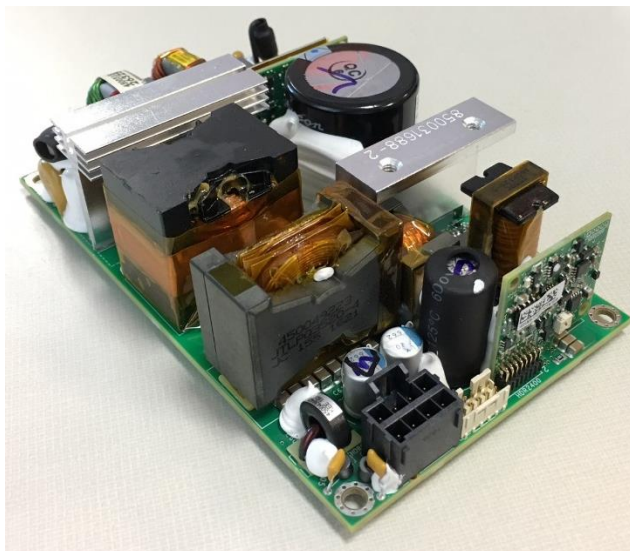

Applications

- Industrial equipment
- Telecommunications equipment
- CATV Equipment (Trapezoidal Input)

Description

In a small 3 x 5 inch footprint, the 12Vdc single-output CLP0412 open frame power supply delivers 92 percent typical power efficiency and 450W output at 42°C and 1m/s airflow. With its small size, the CLP series is specifically designed to handle power challenges associated with tight space and low airflow. Offering a high 20.7W/in³ power density in a 1U high, fan-less form factor, the CLP series addresses a broad range of applications in new products from industrial equipment and communications original equipment manufacturers (OEMs). Higher temperature operation is possible at derated output. The CLP series utilizes a unique design approach at this power level, leveraging zero voltage switching techniques in conjunction with quasi-resonant power factor correction (PFC) circuits. Protection features include overcurrent (OCP), overvoltage (OVP), and overtemperature (OTP).

Features

- Compact size 76.2 mm x 127 mm x 36.8 mm (3 in x 5 in x 1.45 in) with density of 20.7 W/in³
- Universal AC Input Range (90 – 265VAC)
- Output voltage of 12V (adjustable ±5%)
- Standby output of 5V @ 1A (standard versions)
- Maximum output current of 37.5A @ 12Vout (450W)
- High efficiency (92% at Full Load, 230VAC in)
- 450W capability at 42°C and 1m/s airflow with derating at higher temperatures or lower airflows
- Capable of 320W out in sealed enclosure applications with enclosure ambient at 55°C
- Output overcurrent protection (non-latching)
- Overtemperature protection
- Output overvoltage protection
- Minimum of 11ms of holdup time at 450W out
- Parallelable with output current sharing (option)
- Active power factor corrected input
- Conducted EMI - meets CISPR22 (EN55022) and FCC Class B requirements
- Meets IEC61000-4-5, Level 4 (2kV/4kV)
- Compliant to RoHS II EU "Directive 2011/65/EU"
- UL and cUL approved to UL/CSA60950-1, TUV (EN60950-1), CE Mark (for LVD) and CB Report available
- ISO** 9001 and ISO 14001 certified manufacturing facilities

* UL is a registered trademark of Underwriters Laboratories, Inc.

† CSA is a registered trademark of Canadian Standards Association.

‡ VDE is a trademark of Verband Deutscher Elektrotechniker e.V.

** ISO is a registered trademark of the International Organization of Standards

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only, functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

| Parameter | Device | Min | Max | Unit |
|--|------------------|-----|------|------------------|
| Input Voltage - Continuous | All | 90 | 265 | Vac |
| For up to 10 seconds | All | 90 | 275 | Vac |
| Input Voltage – Continuous – CATV Powering trapezoidal waveform (Note: Output power is limited to 254W when 75V input, 275W when 90V input, 320W when 130V input) | CLP0412FPXXXZ05A | 75 | 130 | V _{RMS} |
| Operating Ambient Temperature (see Thermal Considerations section) | All | -40 | 85 | °C |
| Storage Temperature | All | -40 | 85 | °C |
| Humidity (non-condensing) | All | 5 | 95 | % |
| Altitude | All | | 5000 | m |
| Isolation Voltage – Input to output | All | | 3000 | Vac |
| Input to safety ground | All | | 1500 | Vac |
| Outputs to safety ground | All | | 50 | Vac |

Electrical Specifications

| Parameter | Device | Min | Typ | Max | Unit |
|---|--|------|---------|-----------|----------------------|
| Operating Input Voltage | All | 90 | 115/230 | 265 | Vac |
| | CLP0412FPXXXZ05A | 75 | 90 | 130 | V _{RMS} |
| Input Source Frequency | All | 47 | 50/60 | 63 | Hz |
| Input Current (V _{IN} = 90Vac) | All | | 5.57 | | A _{RMS} |
| Input Power Factor (230Vac, Full Load) | All | 0.95 | | | |
| Inrush Transient Current (V _{IN} = 265Vac, T _{amb} = 25°C) | All | | | 60 | A Peak |
| Leakage Current to earth ground (V _{IN} = 265Vac) | All | | | 3.5 | mA |
| Output Voltage Setpoint | All | | 12 | | Vdc |
| Output Voltage Tolerance (due to set point, temperature variations, load and line regulation) | All | -2 | | 2 | % |
| Output Voltage Adjustment Range | All | 11.4 | | 12.6 | Vdc |
| Output Remote Sense Range | All | | | 250 | mVdc |
| Output Load Regulation | All | | | 1 | %Vout |
| Output Line Regulation | All | | | 0.5 | %Vout |
| Output Ripple and Noise – measured with 0.1μF ceramic capacitor in parallel with 470μF polymer capacitor ¹ Peak-to-peak (20MHz Bandwidth) | All | | | 240 | mV p-p |
| Dynamic Load Response – 50% to 100% load transient, 1A/μs slew rate Output voltage deviation Settling Time | All All | | | 5% 500 | % μs |
| Output Current | CLP0412FPXXXZ01A CLP0412FPXXXZ03A CLP0412FPXXXZ05A | 0 | | 37.5 | Adc |
| | | 0 | | 26.7 | Adc |
| Output Current Limit Inception | All | 105 | | 140 | % I _{O,max} |
| Maximum Output Capacitance | All | | | 10000 | μF |
| Standby Output Voltage | All | | 5 | | Vdc |
| Standby Output Current | All | | | 1 | Adc |
| Efficiency: V _{IN} = 230Vac, 20% load | All | | 86.8 | | % |
| 50% load | All | | 91.7 | | % |
| 100% load | All | | 91.9 | | % |

¹ Output ripple specification is met over 25 to 85°C

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

| | | | | | |
|--|------------------|----|------|--|----|
| $V_{IN} = 115\text{Vac}$, 20% load | All | | 85.8 | | % |
| 50% load | | | 89.9 | | % |
| 100% load | | | 89.7 | | % |
| $V_{IN} = 115\text{Vac}$, 20% load | CLP0412FPXXXZ05A | | 76.8 | | % |
| 50% load | | | 88.1 | | % |
| 100% load | | | 90.2 | | % |
| Holdup Time ² – $V_{IN} = 115$ or 230Vac , 450W load | All | 11 | | | ms |

General Specifications

| Parameter | Device | Symbol | Typ. | Unit |
|--|--------|--------|-------------|----------|
| Calculated Reliability based on Telcordia SR-332 Issue 3: Method 1 Case 3 ($V_{IN}=230\text{Vac}$, $I_o = 30\text{A}$, $T_A = 40^\circ\text{C}$, airflow 200LFM, 90% confidence) | All | MTBF | 2,938,636 | Hours |
| Weight | All | | 382 13.5 | g oz. |

Feature Specifications

| Parameter | Device | Min | Typ | Max | Unit |
|---|--------------------------------------|------|------|-----|---------------|
| On/Off Signal Interface – signal referenced to GND | | | | | |
| Logic Low (Power Supply ON) | | | | | |
| Input Low Current | All | | | 7 | mA |
| Input Low Voltage | All | | | 1 | V |
| Logic High (Power Supply OFF) | | | | | |
| Input High Current | All | | | 600 | μA |
| Input Voltage | All | | | 5.5 | V |
| Delay from ON/OFF being enabled to start of output voltage rise | All | | | 50 | ms |
| Output Voltage Rise Time (from 10 to 90% of final value) | All | | 20 | | ms |
| Delay from Input being applied to all outputs being in regulation | All | | | 1 | s |
| Output Overvoltage Protection | All | 13.8 | | 16 | Vdc |
| Input Undervoltage lockout ³ | | | | | |
| Turn-on Threshold (100% load) | CLP0412FPXXXZ01A CLP0412FPXXXZ03A | 85.0 | 87.6 | 90 | Vac |
| Turn-off Threshold (100% load) | | 82.0 | 83.9 | 88 | Vac |
| Turn-on Threshold (100% load) | CLP0412FPXXXZ05A | | 72 | | V_{RMS} |
| Turn-off Threshold (100% load) | CLP0412FPXXXZ05A | | 69 | | V_{RMS} |
| DC OK – open collector, High when output available | | | | | |
| Sink Current | All | | | 4 | mA |
| Maximum Collector Voltage | All | | | 12 | V |

Environmental Specifications

| Parameter | Device | Specification/Test |
|---------------------------------------|--------|--|
| Radiated Emissions ⁴ | All | CISPR22 Class B with 3dB margin |
| Conducted Emissions | All | CISPR22 Class B with 6dB margin |
| ESD | All | IEC61000-4-2, Level 4 Performance Criteria A |
| Radiated Susceptibility ⁵ | All | IEC61000-4-3, Level 3 |
| Electrical Fast Transient Common Mode | All | IEC61000-4-4, Level 3 |

² Holdup time may be lower at cold temperatures³ Undervoltage lockout threshold may vary with output load current level – decreasing as load goes lower⁴ Meets when tested in a suitable enclosure⁵ Meets when tested in a suitable enclosure

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

| | | |
|-----------------------|-----|--|
| Surge Immunity | All | IEC61000-4-5, Level 4 |
| Conducted RF Immunity | All | IEC61000-4-6, Level 3 |
| Input Voltage Dips | All | Output stays within regulation for either ½ cycle interruption or 25% dip from nominal line for 1 second |
| Input Harmonics | All | IEC61000-3-2 |
| Shock and Vibration | All | Per IPC-9592B, Class II |

Safety Specifications

| Parameter | Device | Specification |
|---|--------|---|
| Dielectric Withstand Voltage (between input and output) | All | Minimum of 4,250Vdc for 1 minute |
| Insulation Resistance (between input and output) | All | Minimum of 5 MΩ |
| Safety Standards | All | Class 1, IEC60950, EN60950, with the following deviations: Nemko, UL 60950 (Recognized Component), cUL (Canadian Approval by UL) |

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Characteristic Curves

The following figures provide typical characteristics for the CLP0412 power supply

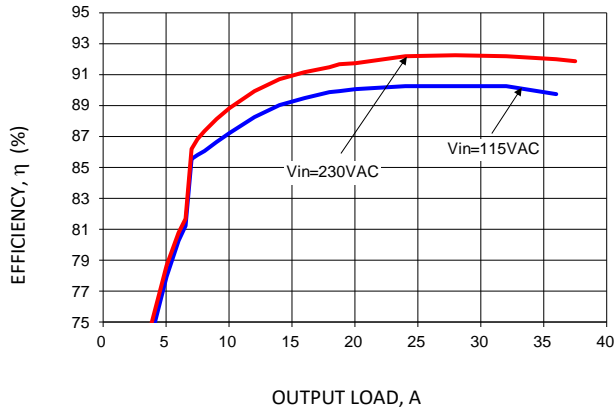


Figure 1. Power Supply Efficiency versus Output Current.

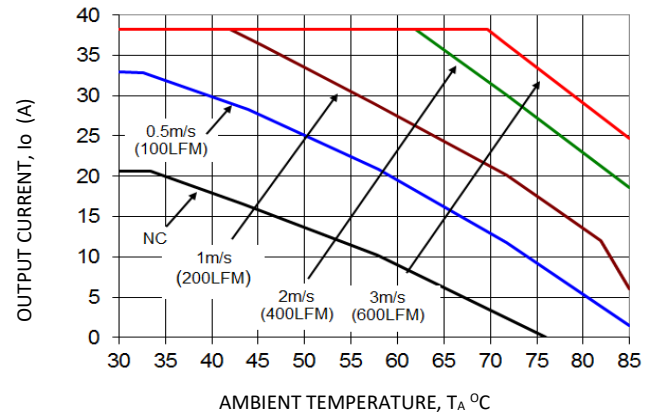


Figure 2. Data shown for model CLP0412FPXXXZ03A, 115VAC in. At 230VAC in derating is the same or better. Standby output is loaded at 0.25A. For derating at other input voltages and other models, consult the GE Technical representative.

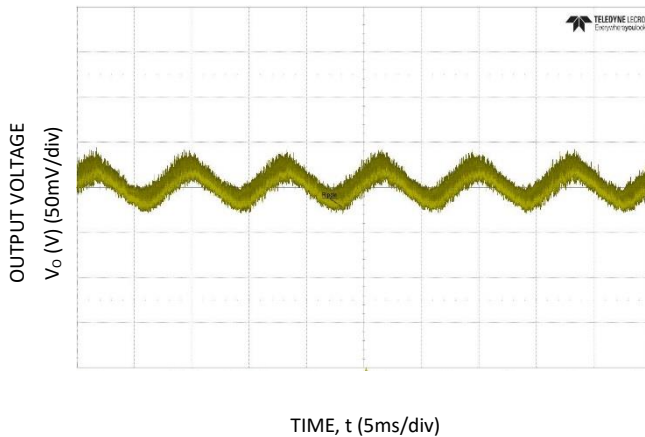


Figure 3. Typical output ripple and noise ($V_{IN} = 115V_{AC}$, 100% load).

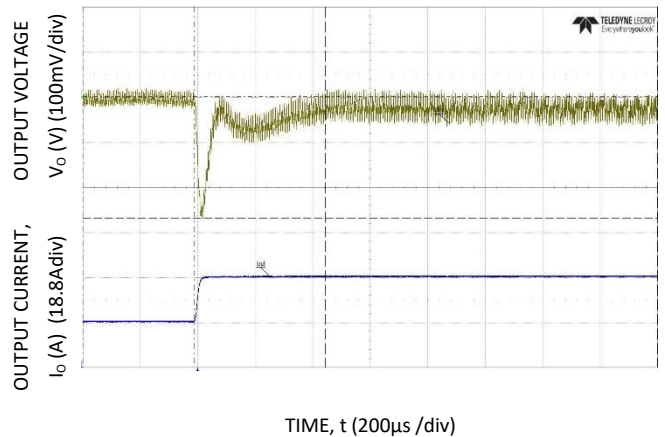


Figure 4. Transient Response to Dynamic Load Change from 50% to 100% at $V_{IN} = 115V_{AC}$.

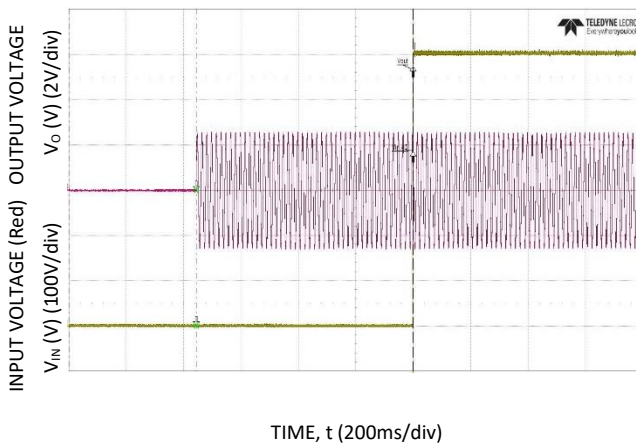


Figure 5. Typical Start-up ($V_{IN} = 90V_{AC}$, Full Load).

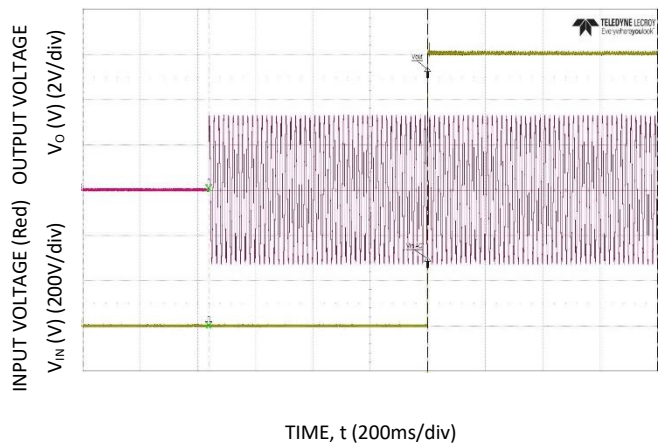


Figure 6. Typical Start-up ($V_{IN} = 230V_{AC}$, Full load)

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Characteristic Curves (cont.)

The following figures provide typical characteristics for the CLP0412 power supply

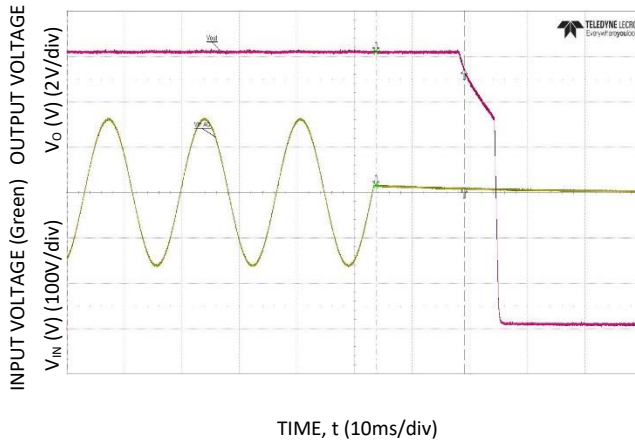


Figure 7. Typical Hold-up waveforms ($V_{IN} = 115V$, 100% load).

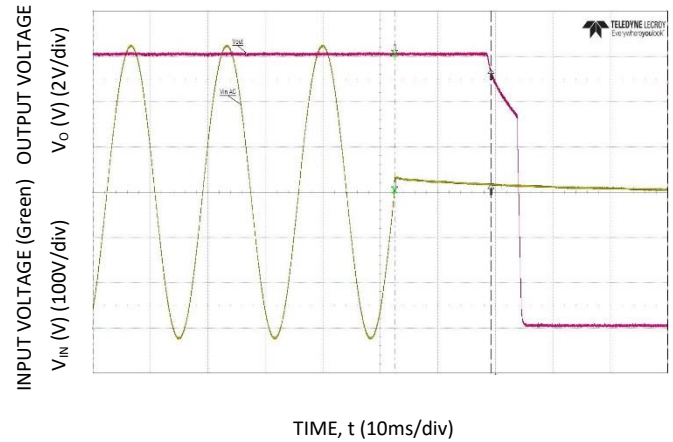


Figure 8. Typical Hold-up waveforms ($V_{IN} = 230V$, 100% load).

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Safety Considerations

The CLP0412 embedded power supply is intended for inclusion in an end product equipment and shall be installed in compliance with the enclosure, mounting, spacing, casualty and segregation requirements of the end-use application. A suitable Electrical and Fire enclosure shall be provided and is not intended to be operated as a stand-alone product. It is cURus, TUV approved using the applicable requirements in the Safety of Information Technology Equipment – Safety – Part 1: General Requirements, ANSI/UL60950-1-2014 and CAN/CSA C22.2 No. 60950-1-07, Second Edition + A2:2014 (MOD), dated October 14, 2014 and EN60950-1:2006+A2:2013. A CB report to the requirement of IEC60950-1 2nd Ed. + Am1 + Am2 with global national deviations has been issued.

Feature Descriptions

Standby Power Supply

A standby output of 5V in the CLP0412 power supply comes up when AC input in the operating range is applied.

Remote On/Off

The CLP0412 power supply features a TTL-compatible On/Off control input. The power supply turns ON when the On/Off input goes low, and turns OFF when the input goes high. Note that if the On/Off pin is left unconnected, the power supply main output will turn ON when AC input is present.

Output Voltage Adjustment

For all units, the output voltage can be adjusted between 11.4V and 12.6V using a potentiometer on the power supply.

Remote Sense

For all versions, the power supply has both positive and negative remote sense connections that can be connected to the positive and negative rails of the main output near the load. The power supply operates even without the remote sense connections being made.

Overcurrent Protection

To provide protection in a fault condition (output overload), the power supply is equipped with internal current-limiting circuitry and can endure current limiting continuously. At the point of current-limit inception, the unit enters hiccup mode. The power supply operates normally once the output current is brought back into its specified range.

Overvoltage Protection

Overvoltage protection is a feature of the CLP0412 power supply that protects both the load and the power supply from an output overvoltage condition. When an overvoltage occurs, the power supply shuts down and latches off until the overvoltage condition is removed. It is necessary to recycle the input to restart the power supply when this protection is activated.

Overtemperature Protection (OTP)

For additional protection in a fault condition the CLP0412 is equipped with a thermal shutdown circuit which detects excessive internal temperatures and shuts the unit down. Once the power supply goes into overtemperature shutdown, it will cool before attempting to restart. The overtemperature protection circuit will typically kick in when the unit is operated at 450W output with an ambient temperature of 53°C and 1m/s (200LFM) airflow. In a sealed enclosure OTP will depend on enclosure design and cooling.

Input Undervoltage Lockout

At input voltages below this limit, power supply operation is disabled. The power supply will begin to operate at an input voltage above the undervoltage lockout turn-on threshold

DC OK

The CLP0412 provides a DC OK signal that indicates when the output has come up and is in regulation. This is an open-collector type signal that goes high when the output is available and within regulation.

Power Good LED

A green LED on board the power supply illuminates when the main output voltage is above 10V.

Paralleling with Active Output Current Sharing (option)

For modules with this option, paralleling of up to four power units is supported. Current sharing of multiple units is implemented by connecting the Parallel pins together and connecting identical output voltage and remote sense polarity pins of the modules together at the load (see Figure 9). At load current levels above 20%, the output currents of multiple power supplies are within $\pm 5\%$ of the full load value. When not using this feature, paralleling pins should be left unconnected.

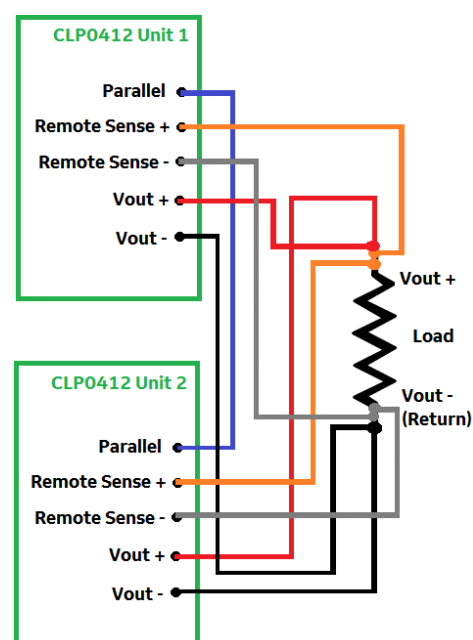


Fig. 9. Paralleling Connections for CLP0412 units.

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Thermal Considerations

The power supply can be operated in a variety of thermal environments; however sufficient cooling should be provided to ensure reliable operation.

Considerations include ambient temperature, airflow, power supply dissipation and the need for increased reliability. A reduction in the operating temperature of the power supply will result in increased reliability. The thermal data presented here is based on measurements taken during testing in a wind tunnel or temperature chamber.

Heat Transfer via Convection

Increased airflow through the power supply enhances the heat transfer via convection. Figure 10 shows the preferred airflow direction. Contact your GE technical representative for derating information in other airflow directions.

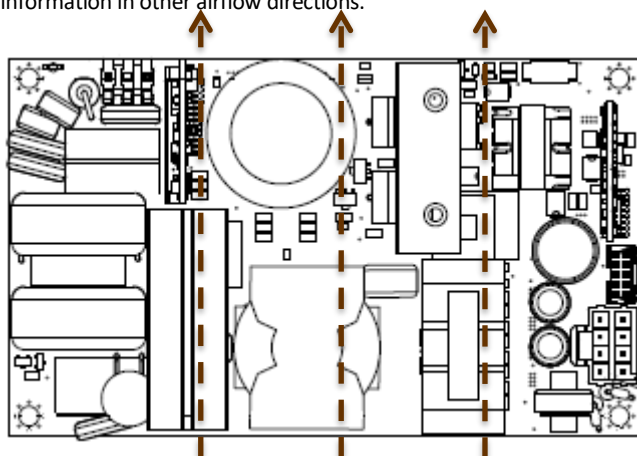


Fig. 10. Preferred airflow direction for cooling.

Operation in a Sealed Enclosure (CLP0412FPXXXZ01A & CLP0412FPXXXZ05A)

The CLP0412 power supply can also be operated in a sealed enclosure or in an environment where cooling is primarily via conduction. Figure 11 shows an arrangement where thermally conductive pads are used to transfer heat from the top and bottom of the power supply into the enclosure. Under such conditions, the power supply is capable of reduced power operation as shown in Table 1.

Table 1. Output Power Capability when the CLP0412FPXXXZ01A is cooled primarily via conduction.

| Cold Wall Temperature (°C) | Max. Output Power (W) |
|----------------------------|-----------------------|
| 25 | 420 |
| 55 | 320 |

Table 2. Output Power Capability when the CLP0412FPXXXZ05A is cooled primarily via conduction.

| Vin(T) | Max. Output Current (A) | Max. Output Power (W) | Max. Enclosure Inside Ambient (°C) |
|--------|-------------------------|-----------------------|------------------------------------|
| 75 | 21.2 | 225 | 82 |
| 90 | 22.9 | 275 | 85 |
| 130 | 26.7 | 320 | 85 |

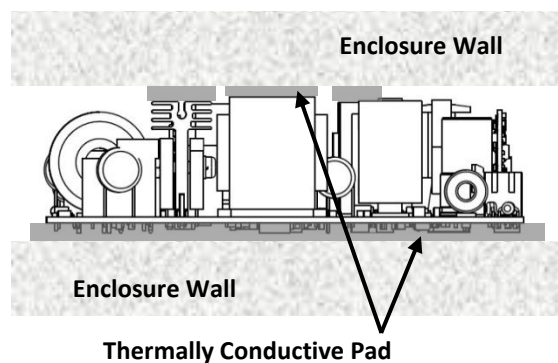
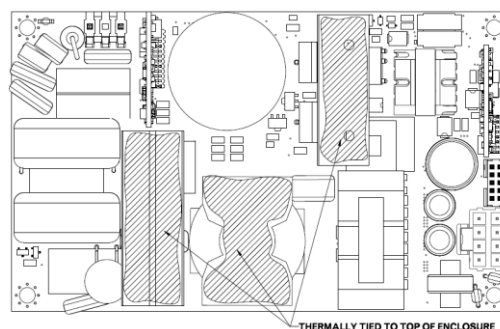
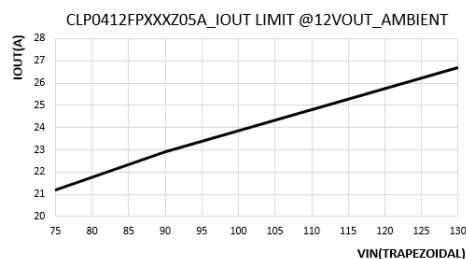


Fig. 11. Example arrangement of the CLP0412 for sealed enclosure applications.

Difference Between the CLP0412FPXXXZ01A and CLP0412FPXXXZ03A Product Codes


The only difference between Z01A (Enclosure Version) and the Z03A (Airflow Version) is the over temperature protection (OTP) setpoints. For the Z01A enclosure version, the OTP setpoints were lowered to protect the unit from excessive temperatures in the enclosure environment. For the Z03A airflow version the OTP trip points were increased to a higher temperature, while still maintaining safe component temperatures. OTP setpoints were increased on the airflow version in order to obtain better derating performance in airflow applications.

CLP0412 Open Frame Power Supply


90 - 265Vac input; 12Vdc output; 450W Output Power

Mechanical Outline


TOP VIEW

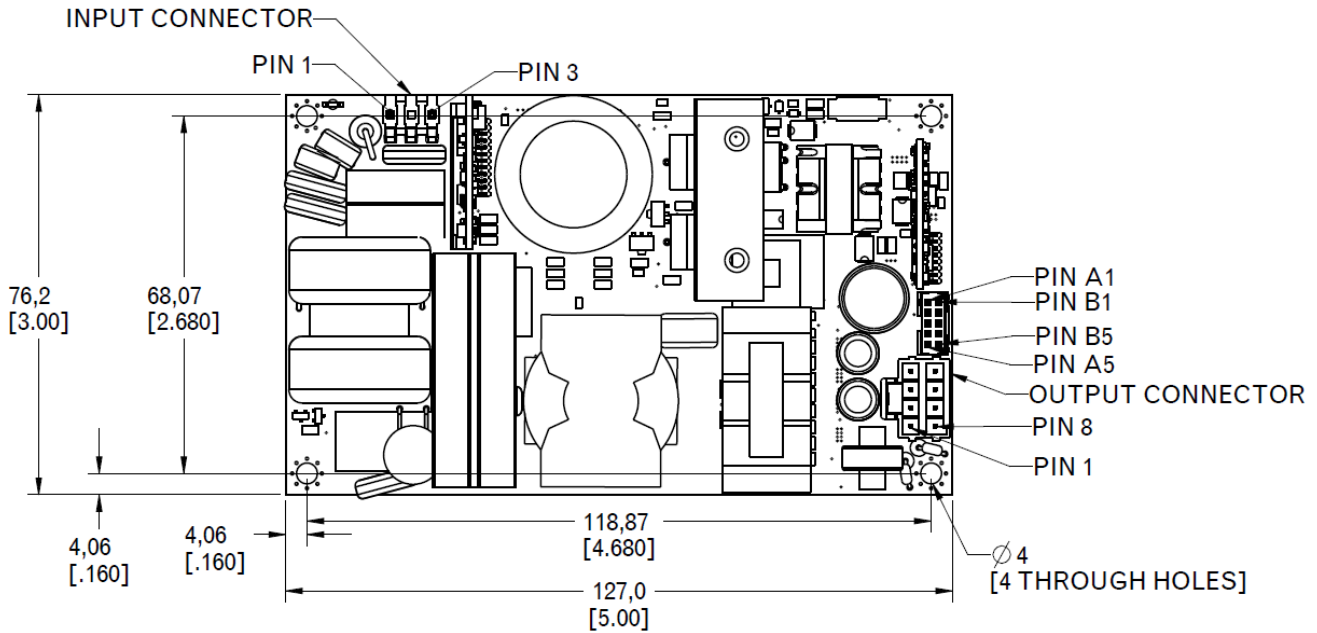

SIDE VIEW

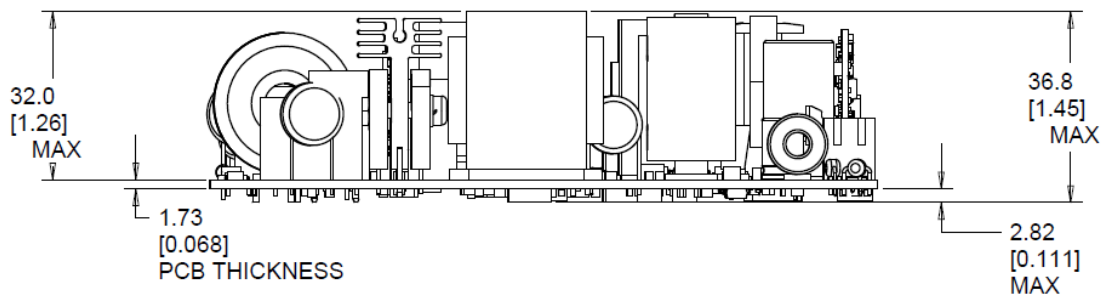

3D VIEW

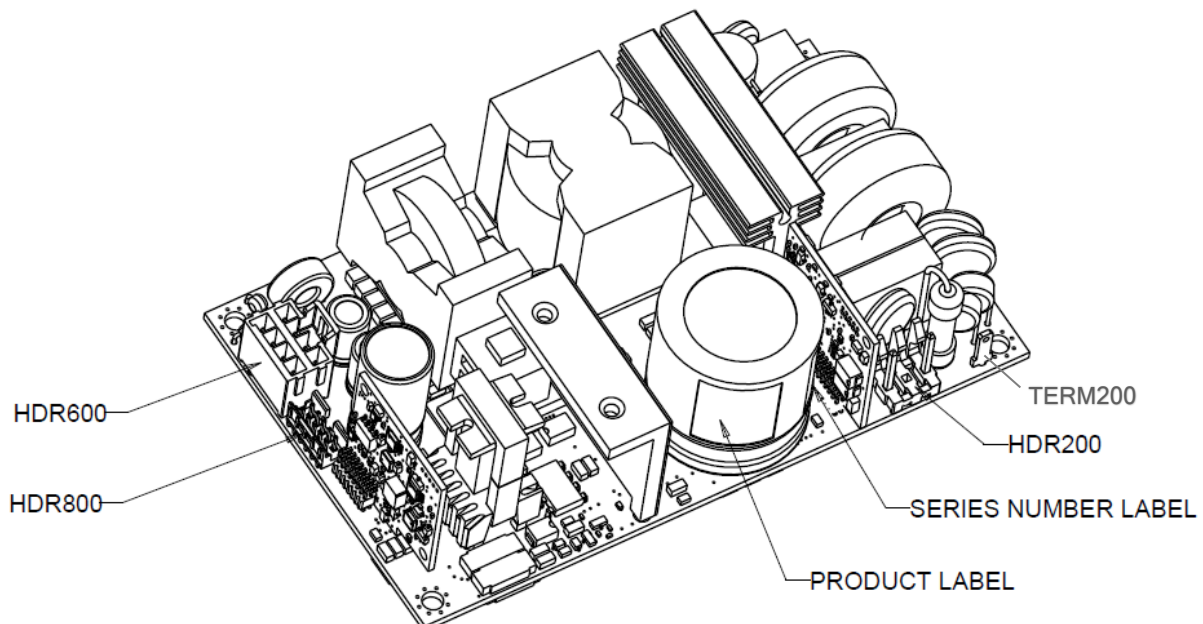

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Table 2. Connector Information

| Connector | Connector on Power Supply | Mating Connector |
|------------------------------|-----------------------------------|--|
| AC Input Connector (HDR200) | Molex 41671-3473 or equivalent | Molex 09-50-8031 or equivalent |
| DC Output Connector (HDR600) | Molex 172298-1208 or equivalent | Molex 172258-1008 or equivalent |
| Auxiliary Connector (HDR800) | FCI 98414-G04-10ULF or equivalent | FCI 90311-010LF or equivalent |
| Ground Pin (TERM200) | TE P/N: 63756-1 | TE 110 series Receptacles (ex: 63093-1 18~14AWG) or equivalent |

Table 3. Pinout Information

| AC Input Connector (HDR200) | | DC Output Connector (HDR600) | | Auxiliary Connector (HDR800) | | | |
|-----------------------------|--------------|------------------------------|-----------------|------------------------------|----------------|--------|-------------------|
| PIN 1 | Line | PIN 1, 2, 3, 4 | VOUT + | PIN A1 | 5V Standby | PIN B1 | PARALLEL |
| PIN 2 | NC (Removed) | PIN 5, 6, 7, 8 | VOUT – (Return) | PIN A2 | 5V Standby | PIN B2 | 5V Standby Return |
| PIN 3 | Neutral | | | PIN A3 | NC | PIN B3 | 5V Standby Return |
| | | | | PIN A4 | REMOTE SENSE + | PIN B4 | DC_OK |
| | | | | PIN A5 | REMOTE SENSE – | PIN B5 | ON/OFF |

CLP0412 Open Frame Power Supply

90 - 265Vac input; 12Vdc output; 450W Output Power

Ordering Information

Please contact your GE Sales Representative for pricing, availability and optional features.

Table 4. Device Codes

| Device Code | Input Voltage Range | Output Voltage | Output Current | On/Off Control | Standby Supply | Temperature Range | Intended Application | Comcodes |
|------------------|--|----------------|----------------|----------------|----------------|-------------------|-----------------------------------|------------------|
| CLP0412FPXXXZ01A | 90 – 265Vac | 12.0Vdc | 37.5A | Negative Logic | 5V @ 1A | -40 to 85°C | Enclosed with conduction cooling* | CLP0412FPXXXZ01A |
| CLP0412FPXXXZ03A | 90 – 265Vac | 12.0Vdc | 37.5A | Negative Logic | 5V @ 1A | -40 to 85°C | Open with external airflow | CLP0412FPXXXZ03A |
| CLP0412FPXXXZ05A | 75 – 130V _{RMS} Trapezoidal Waveform | 12.0Vdc | 26.7A | Negative Logic | 5V @ 1A | -40 to 85°C | Enclosed with conduction cooling* | CLP0412FPXXXZ05A |

*Enclosure not provided with power supply. To be designed by user. Different OTP setting than open frame version. See Page 8 for details

Contact Us

For more information, call us at

USA/Canada:

+1 877 546 3243, or +1 972 244 9288

Asia-Pacific:

+86.021.54279977*808

Europe, Middle-East and Africa:

+49.89.878067-280

www.gecriticalpower.com



GE Critical Power reserves the right to make changes to the product(s) or information contained herein without notice, and no liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.