

# SuperNine® RJ45 and USB connectors

## 233-345 receptacle with USB to crimp contacts

### MIL-DTL-38999 Series III type




| How To Order 233-345    |                                                                                                            |    |    |    |   |   |   |   |   |
|-------------------------|------------------------------------------------------------------------------------------------------------|----|----|----|---|---|---|---|---|
| Sample Part Number      | 233-345                                                                                                    | NF | 00 | 15 | 2 | A | N | H | T |
| Series / Basic Part No. | SuperSeal™ USB 2.0 Connector                                                                               |    |    |    |   |   |   |   |   |
| Finish                  | <b>NF</b> = Cadmium Olive Drab<br><b>ME</b> = Electroless Nickel<br><b>MT</b> = Nickel PTFE                |    |    |    |   |   |   |   |   |
| Connector Style         | <b>00</b> = Wall Mount Receptacle with Slotted Holes<br><b>07</b> = Jam Nut Receptacle<br><b>G6</b> = Plug |    |    |    |   |   |   |   |   |
| Shell Size              | <b>15</b>                                                                                                  |    |    |    |   |   |   |   |   |
| USB Performance         | <b>2</b> = USB 2.0                                                                                         |    |    |    |   |   |   |   |   |
| USB Rear Interface      | <b>A</b> = USB Type A Interface                                                                            |    |    |    |   |   |   |   |   |
| Alternate Key Position  | <b>A, B, C, D, E, N</b> = Normal; Per MIL-DTL-38999                                                        |    |    |    |   |   |   |   |   |
| USB Orientation         | <b>H</b> = Horizontal <b>V</b> = Vertical                                                                  |    |    |    |   |   |   |   |   |
| Shrink Boot             | <b>T</b> = Shrink Boot Part No. 770-028 (Omit for None)                                                    |    |    |    |   |   |   |   |   |

\*For panel cut-out dimensions, electrical specifications and RJ45 Orientation Options see page E-11 and E-12




**Wall Mount Receptacle  
Front View**

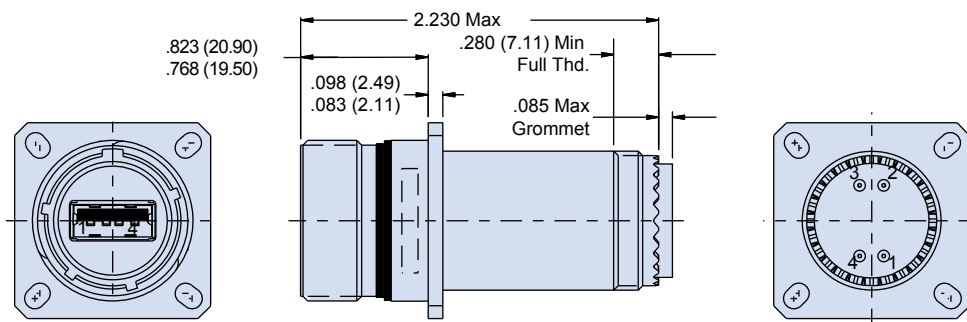

**E**



**Wall Mount Receptacle  
Back View**

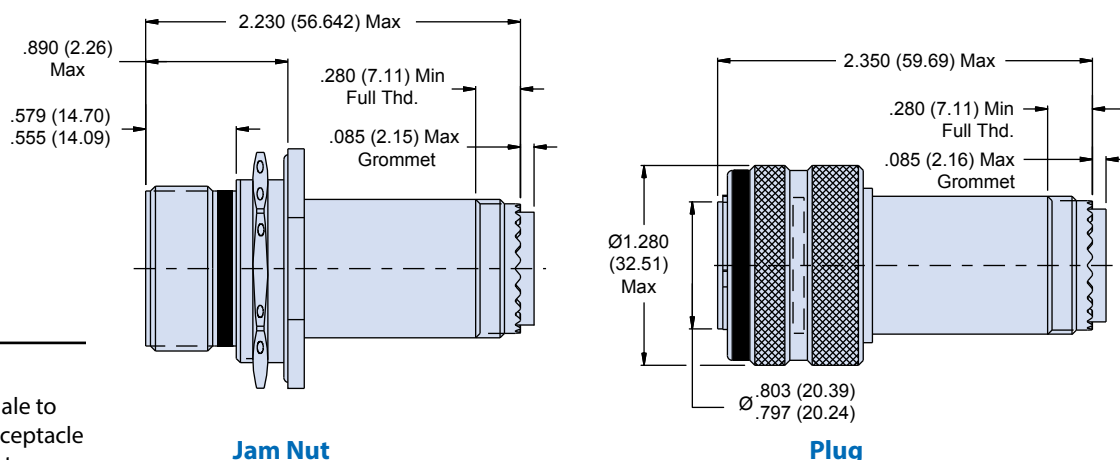

#### NOTES

1. Plug shells contain USB male to female interfaces while receptacle shells contain USB female to female interfaces
2. All external dimensions, features, etc. compliant with D38999/20, /24 & /26.
3. Consult factory for additional information.