



Series 804 Push-Pull High-Speed Mighty Mouse

Quick-Disconnect Plug Connector
with #23 Crimp Rear Release Contacts
804-026 and 804-027 Ordering Information



Quick Disconnect These plugs snap securely into receptacle housings and release with a simple pull.

Two Keying Styles A single master key provides fast mating in low-light situations, or specify three keys for more polarizing options.

Two Shell Styles Integral platform for direct shield attachment using the Band-Master™ ATS termination system, or an accessory thread for attaching a strain relief.

How To Order

How To Order							
Sample Part Number		804-026	-07	M	6-7	P	A
Series (See Table I)	804-026 = With Banding Platform 804-027 = With Sccessory Thread						
Shell Style	-06 = Plug						
Shell Material and Finish	M = Aluminum / Electroless Nickel RoHS Compliant NF = Aluminum / Cadmium with Olive Drab Chromate ZN = Aluminum / Zinc-Nickel with Olive Drab Chromate ZNU = Aluminum / Zinc-Nickel with Black Chromate Z1 = Stainless Steel / Passivated RoHS Compliant						
Shell Size - Insert Arrangement (See Table Ii)	6-4, 6-7, 7-10, 9-19, 10-26						
Contact Type	Connector supplied with contacts P = Pin S = Socket	Connector supplied without contacts A = Pin Connector B = Socket Connector	Connector Supplied with 30 AWG Crimp Barrel G = Pin H = Socket				
Shell Key Positions (See Table III)	A = Normal B = Pos. B C = Pos. C D = Pos. D E = Pos. F F = Pos. F						

Q

Table I: Series

804-026 Plug with Banding Platform	804-027 Plug with Accessory Thread

Table II: Shell Size – Insert Arrangement

6-4	6-7	7-10	9-19	10-26


Dimensions in Inches (millimeters) are subject to change without notice.

Series 804 Push-Pull *High-Speed* Mighty Mouse


Quick-Disconnect Plug Connector
with #23 Crimp Rear Release Contacts
804-026 and 804-027 Ordering Information




Series 804
High-Speed

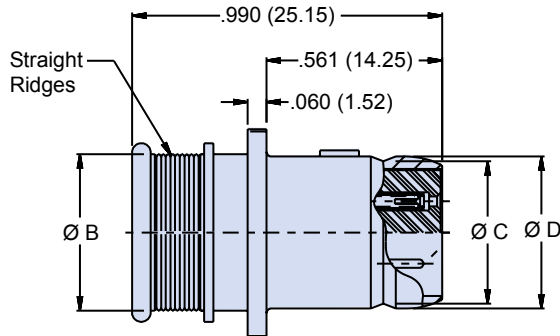

Integral Band Platform
804-026-06

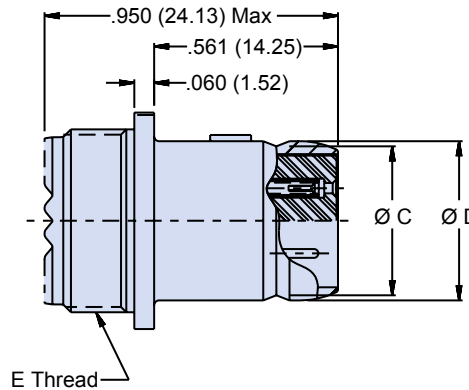


Accessory Thread
804-027-06

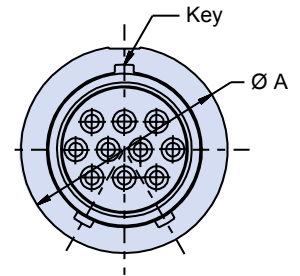

Dimensions									
Shell Size	Ø A Max.		Ø B		Ø C		Ø D		E Threads
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	
6	.495	12.57	.286	7.26	.282	7.16	.313	7.95	.3125-32 UNEF-2A
7	.575	14.61	.390	9.91	.351	8.92	.383	9.73	.4375-28 UNEF-2A
9	.670	17.02	.500	12.70	.454	11.53	.486	12.34	.5625-24 UNEF-2A
10	.745	18.92	.564	14.33	.529	13.44	.563	14.30	.6250-24 UNEF-2A

Table III: Plug Key Positions



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.