

## SERIES 62AG

### Price Competitive Solution

#### FEATURES



- Over 1 million rotational cycles
- 2-bit gray code output
- Quadrature coding
- Available in 16, 20, 24 and 32 detent positions
- Choices of cable length and terminations
- Available for 5Vdc and 3.3Vdc
- Optional integrated pushbutton
- Patented light pipe technology
- Cost competitive with mechanical encoders at higher volumes
- Optional shaft and panel seal

#### APPLICATIONS

- Automotive
  - audio systems
  - navigation systems
- Medical
  - patient monitoring systems
- Test & Measurement
  - analyzers
  - oscilloscopes
- Audio & Video
  - consumer electronics
  - professional editing equipment




#### DIMENSIONS in inches (and millimeters)

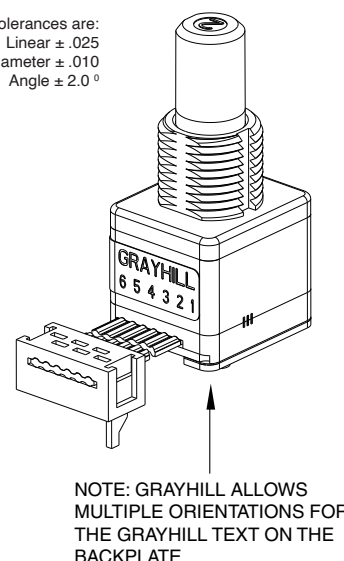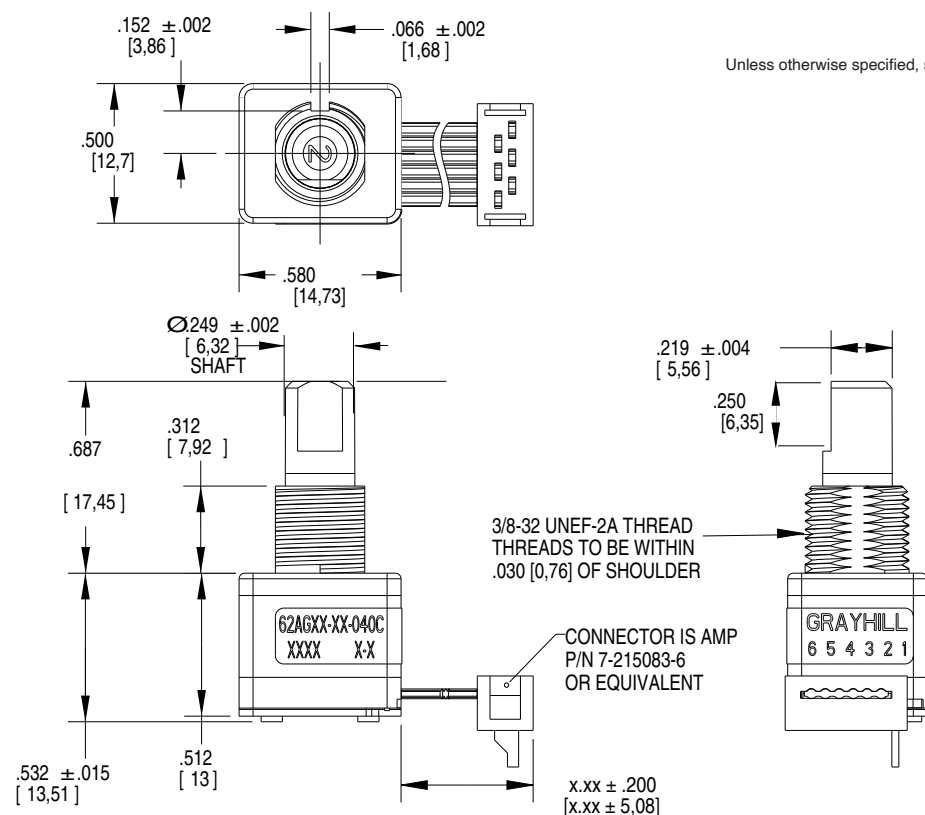


#### MOUNTING PANEL RECOMMENDATIONS FOR PANEL SEAL VERSIONS:

1. PANEL THICKNESS SHOULD NOT EXCEED .157.
2. MOUNTING HOLE TO BE  $\varnothing .375 - \varnothing .385$ .
3.  $\varnothing .470 \times .020$  DEEP COUNTERBORE ON REVERSE OF PANEL REQUIRED FOR PROPER SEALING.
4. ANTI-ROTATION FEATURE IS RECOMMENDED. FEATURE SHOULD BE DESIGNED TO LOCK INTO BUSHING KEYWAY.


#### Suggested Mounting Panel Cutout

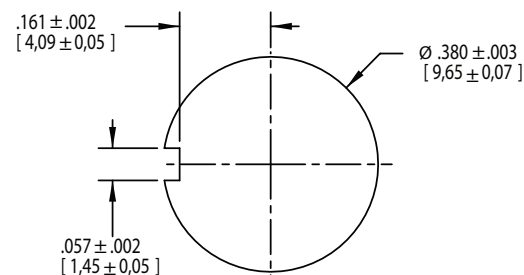


## Termination Options

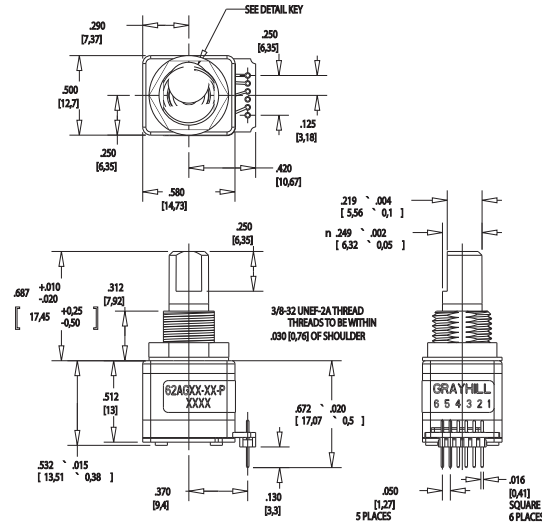

P - .050 Center Pins with 0.185 inch length

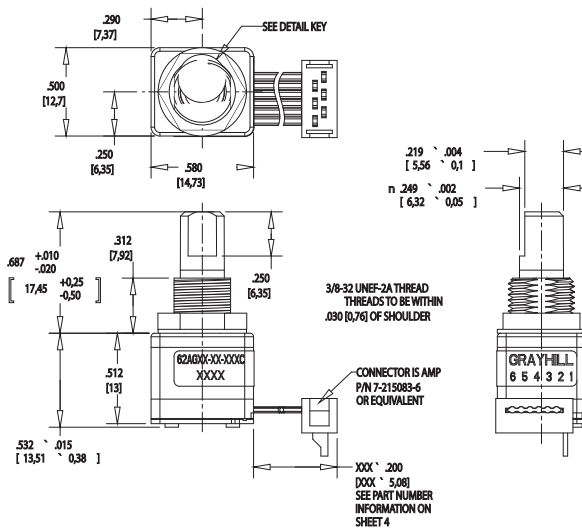


C - .050 Center Ribbon Cable with connector

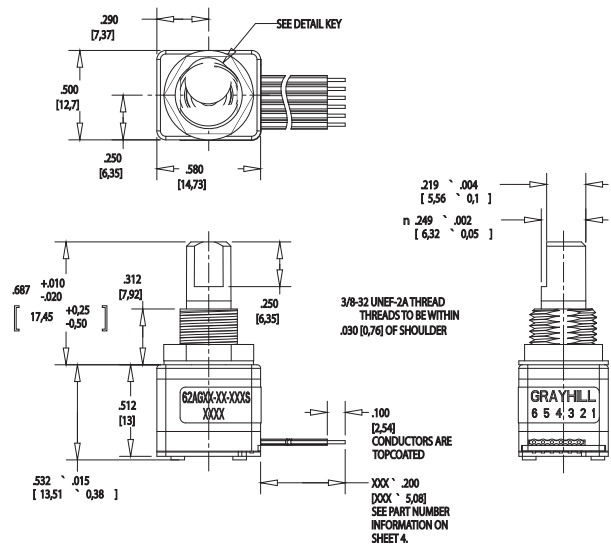

S - .050 Center Ribbon Cable with .100 stripped end

## WAVEFORM AND TRUTH TABLE

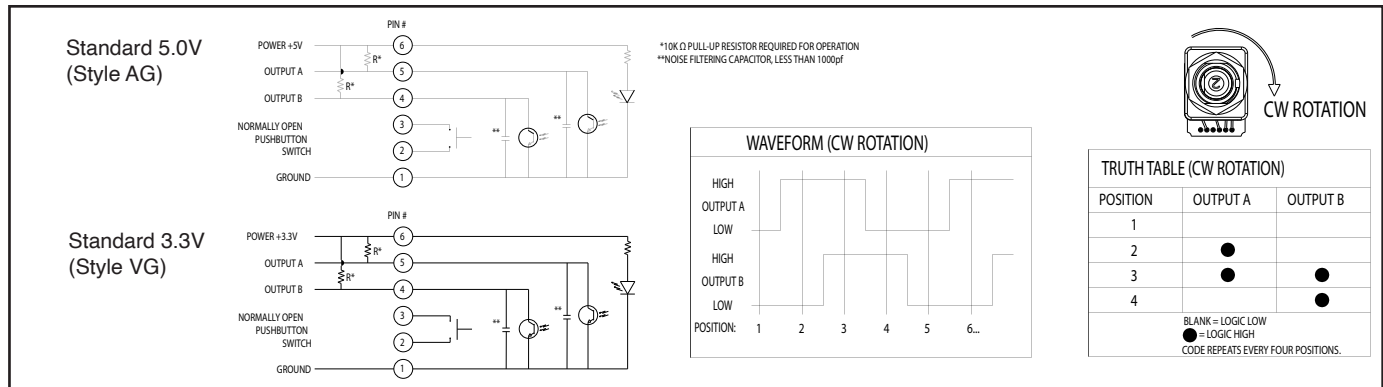

## SPECIFICATIONS

## Environmental Specifications

Operating Temperature: -40°C to 85°C

Storage Temperature: -40°C to 85°C

Humidity: 96 hours@90-95% humidity@40°C

**Mechanical Vibration:** Harmonic motion with amplitude of 15g within a varied frequency of 10 to 2000 Hz for 12 hours
**Mechanical Shock:**

Test 1: 100g for 6 ms half-sine wave with a velocity change of 12.3 ft/s

Test 2: 100g for 6 ms sawtooth wave with a velocity change of 9.7 ft/s

**Seal:** Meets IP67 (above panel for sealed options only)
**Average Rotational Torque:**

Low = 2.0±1.4 in-oz initially

High = 3.5±1.4 in-oz initially

50% of initial value after 1 million cycles

**Mechanical Life:** 1,000,000 cycles of operation. 1 cycle is a rotation through all positions and a full return.
**Mounting Torque:** 15in-lbs. maximum**Shaft Pushout Force:** 45 lbs. minimum**Terminal Strength:** 15 lbs. Cable pull out force minimum**Solderability:** 95% free of pin holes & voids**Maximum rotational speed:** 100 rpm
**Detent Rotor:** Reinforced Nylon Zytel 70G33L UL 94
**Detent Spring:** 303 Stainless Steel
**Housing, Upper:** Nylon 6/6 25% glass reinforced. Zytel FR-50
**Light Pipe:** Lexan, GE**Code Rotor:** Delrin 100
**Housing, Lower:** Nylon 6/6 25% glass reinforced. Zytel FR-50

**Pushbutton Actuator:** Reinforced nylon. Zytel 70G33L. UL 94
**Pushbutton Dome:** Stainless Steel
**Printed Circuit Board:** NEMA Grade FR4, Double clad with copper, Plated with gold over nickel
**Infrared Emitting Diode:** Gallium Arsenide**Phototransistor Diode:** NPN Silicon**Resistor:** Metal oxide on ceramic substrate**Spacer:** Pet plastic**Backplate:** Stainless Steel**Label:** TT406 thermal transfer cast film
**Solder:** 96.5% tin / 3% silver / 0.5% copper. No clean.
**Hex Nut:** Brass, Plated with nickel
**Lockwasher:** Zinc Plated Spring Steel with Clear Trivalent Chromate Finish

**Cable:** Copper Stranded with topcoat in PVC insulation

**Connector (.050 center):** PA4.6 with tin/nickel plated phosphor bronze

## Rotary Electrical and Mechanical Specifications

**Operating Voltage:**

AG Style 5.00±0.25 Vdc

VG Style 3.30±0.125 Vdc

**Supply Current:**

AG Style 30 mA maximum

VG Style 30 mA maximum

**Logic Output Characteristics:**

AG Style - Logic high no less than 3.0 Vdc

Logic low shall be no greater than 1.0 Vdc

VG Style - Logic high no less than 2.0 Vdc

Logic low shall be no greater than 1.0 Vdc

**Output:** Open Collector Phototransistor**Optical Rise Time:** 30ms maximum**Optical Fall Time:** 30ms maximum

## Pushbutton Electrical and Mechanical Specifications

**Rating:** 10 mA @ 5 Vdc
**Contact Resistance:** <10 Ω (Compatible with CMOS or TTL)
**Life:** 1 million actuations minimum**Contact Bounce:** <4 ms make,


&lt;10ms break

**Actuation Force:** 5 = 510±150 grams,

9 = 950±200 grams

**Shaft Travel:** .017 ± .008 INCH

## Materials and Finishes

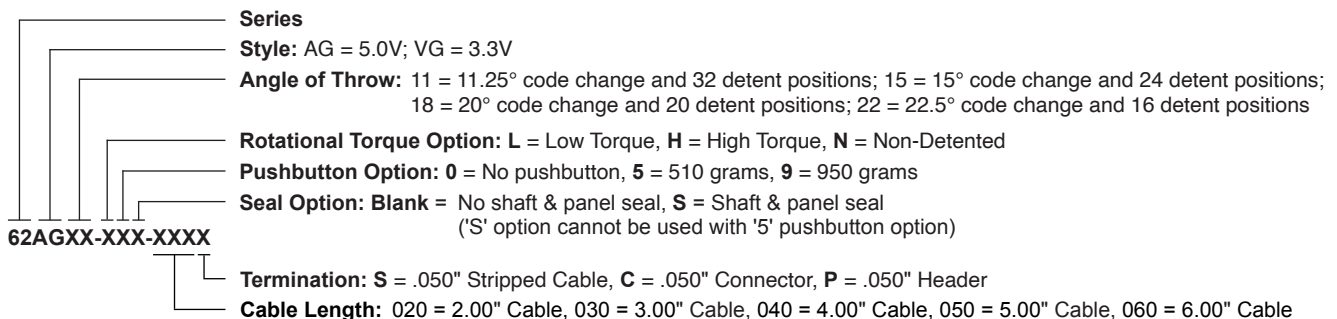**Bushing:** Zamak 2**Shaft:** Zamak 2**Shaft and Panel Seals:** Silicone Rubber

Available from your local Grayhill Distributor. For prices and discounts, contact a local sales office, an authorized distributor, or Grayhill.