


SMT-Type Zener Diode

BZX84C2V0 - BZX84C75

FEATURES

- Large selection of zener voltages: 2.0V ~ 75V
- Tight voltage tolerance: $\pm 5\%$ for C-series
- Ultra low-profile package well suited for automated assembly
- MSL Class 1 compatible

HF

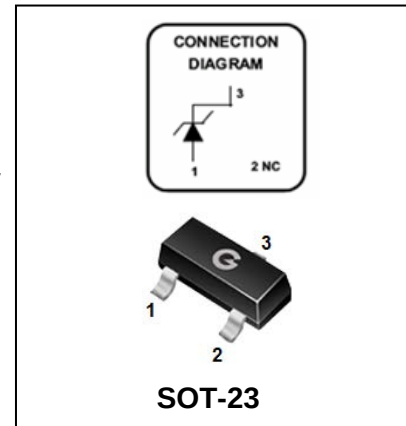

APPLICATIONS

- General voltage regulation
- Mobile & handheld systems

ORDERING INFORMATION

Part Number	Marking	Package
BZX84C2V0 - BZX84C75	See Electrical Characteristics	SOT-23

MAXIMUM RATING (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Forward Voltage @ $I_F = 10\text{mA}$	V_F	0.9	V
Power Dissipation (Collector)	P_C	350	mW
Thermal Resistance (Junction-to-Ambient)	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Thermal Resistance (Junction-to-Case)	$R_{\theta JC}$	295	$^\circ\text{C/W}$
Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: These ratings are limiting values above which the serviceability of the diodes may be impaired.

SMT-Type Zener Diode

BZX84C2V0 - BZX84C75

ELECTRICAL CHARACTERISTICS (@ T_A = 25°C unless otherwise specified)

Part Number	Marking Code	Zener Voltage V _Z (V)			@ I _{ZT} (mA)	Maximum Zener Impedance			Maximum Reverse Current I _R (μA)	@ V _R (V)
		Min.	Typ.	Max.		Z _{YT} (Ω) @ I _{ZT}	Z _{ZK} (Ω)	@ I _{ZK} (mA)		
BZX84C2V0	Z10	1.90	2.00	2.10	5	100	600	1.0	150.000	1.0
BZX84C2V2	Z19	2.09	2.20	2.31	5	100	600	1.0	150.000	1.0
BZX84C2V4	Z11	2.28	2.40	2.52	5	100	600	1.0	50.000	1.0
BZX84C2V7	Z12	2.57	2.70	2.84	5	100	600	1.0	20.000	1.0
BZX84C3V0	Z13	2.85	3.00	3.15	5	95	600	1.0	10.000	1.0
BZX84C3V3	Z14	3.14	3.30	3.47	5	95	600	1.0	5.000	1.0
BZX84C3V6	Z15	3.42	3.60	3.78	5	90	600	1.0	5.000	1.0
BZX84C3V9	Z16	3.71	3.90	4.10	5	90	600	1.0	3.000	1.0
BZX84C4V3	Z17	4.09	4.30	4.52	5	90	600	1.0	3.000	1.0
BZX84C4V7	Z1	4.47	4.70	4.94	5	80	500	1.0	3.000	2.0
BZX84C5V1	Z2	4.85	5.10	5.36	5	60	480	1.0	2.000	2.0
BZX84C5V6	Z3	5.32	5.60	5.88	5	40	400	1.0	1.000	2.0
BZX84C6V2	Z4	5.89	6.20	6.51	5	10	150	1.0	3.000	4.0
BZX84C6V8	Z5	6.46	6.80	7.14	5	15	80	1.0	2.000	4.0
BZX84C7V5	Z6	7.13	7.50	7.88	5	15	80	1.0	1.000	5.0
BZX84C8V2	Z7	7.79	8.20	8.61	5	15	80	1.0	0.700	5.0
BZX84C9V1	Z8	8.65	9.10	9.56	5	15	100	1.0	0.500	6.0
BZX84C10	Z9	9.50	10.00	10.50	5	20	150	1.0	0.200	7.0
BZX84C11	Y1•	10.45	11.00	11.55	5	20	150	1.0	0.100	8.0
BZX84C12	Y2•	11.40	12.00	12.60	5	25	150	1.0	0.100	8.0
BZX84C13	Y3	12.35	13.00	13.65	5	30	170	1.0	0.100	8.0
BZX84C15	Y4	14.25	15.00	15.75	5	30	200	1.0	0.100	10.5
BZX84C16	Y5	15.20	16.00	16.80	5	40	200	1.0	0.100	11.2
BZX84C18	Y6	17.10	18.00	18.90	5	45	225	1.0	0.100	12.6
BZX84C20	Y7	19.00	20.00	21.00	5	55	225	1.0	0.100	14.0
BZX84C22	Y8	20.90	22.00	23.10	5	55	250	1.0	0.100	15.4
BZX84C24	Y9	22.80	24.00	25.20	5	70	250	1.0	0.100	16.8
BZX84C27	Y10	25.65	27.00	28.35	2	80	300	0.5	0.100	18.9
BZX84C30	Y11	28.50	30.00	31.50	2	80	300	0.5	0.100	21.0
BZX84C33	Y12	31.35	33.00	34.65	2	80	325	0.5	0.100	23.1
BZX84C36	Y13	34.20	36.00	37.80	2	90	350	0.5	0.100	25.2
BZX84C39	Y14	37.05	39.00	40.95	2	130	350	0.5	0.100	27.3
BZX84C43	Y15	40.85	43.00	45.15	2	150	375	0.5	0.100	30.1
BZX84C47	Y16	44.65	47.00	49.35	2	170	375	0.5	0.100	32.9
BZX84C51	Y17	48.45	51.00	53.55	2	180	400	0.5	0.100	35.7
BZX84C56	Y18	53.20	56.00	58.80	2	200	425	0.5	0.050	39.2
BZX84C62	Y19	58.90	62.00	65.10	2	215	450	0.5	0.050	43.4
BZX84C68	Y20	64.60	68.00	71.40	2	240	475	0.5	0.050	47.6
BZX84C75	Y21	71.25	75.00	78.75	2	255	500	0.5	0.050	52.5

SMT-Type Zener Diode

BZX84C2V0 - BZX84C75

TYPICAL CHARACTERISTICS (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

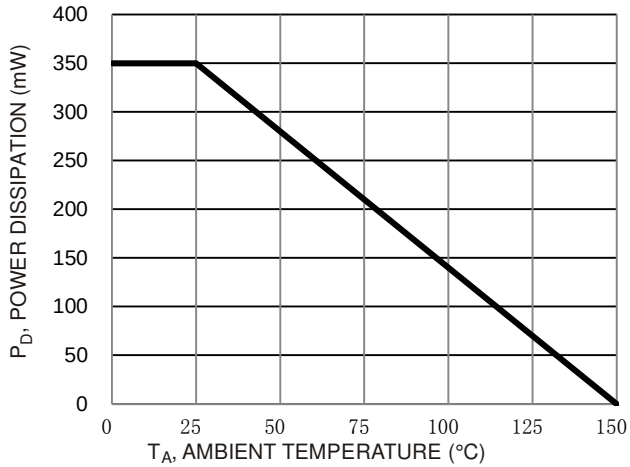


Fig. 1 Power Derating Curve

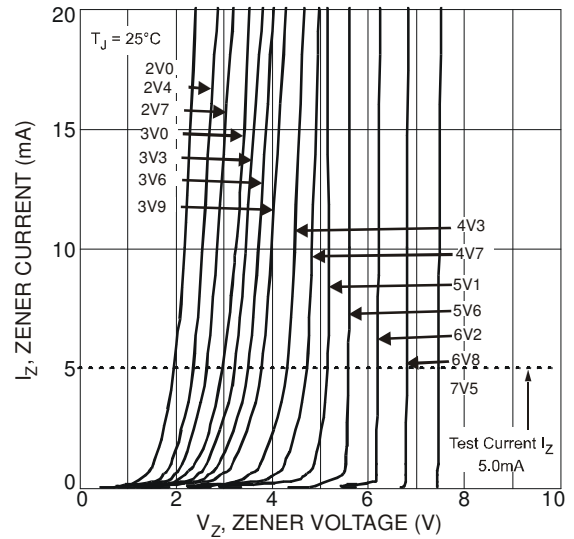


Fig. 2 Typical Zener Breakdown Characteristics

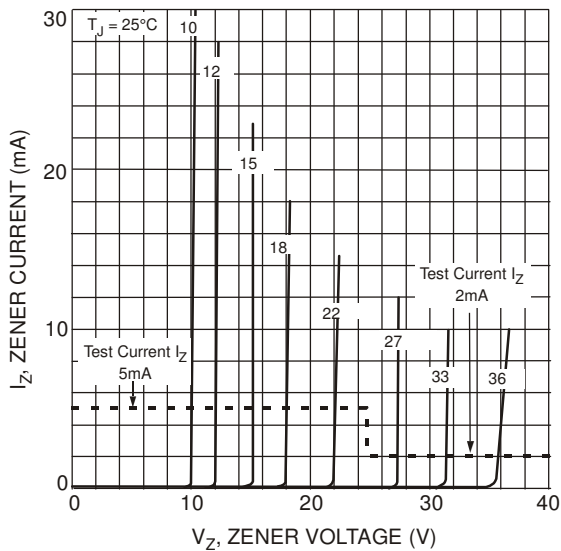


Fig. 3 Typical Zener Breakdown Characteristics

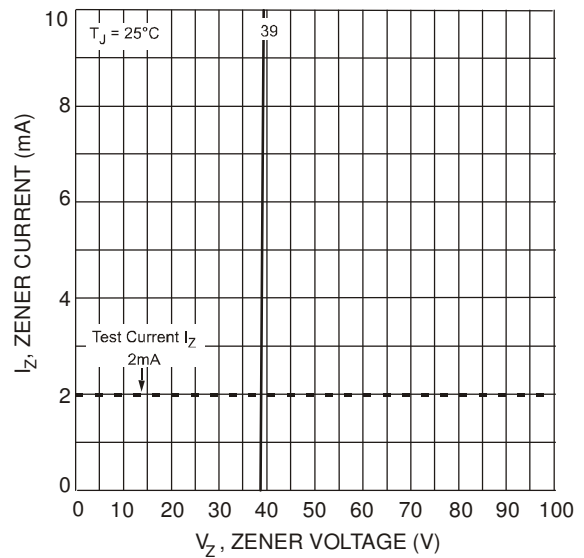



Fig. 4 Typical Zener Breakdown Characteristics

SMT-Type Zener Diode


BZX84C2V0 - BZX84C75

PACKAGE OUTLINE (Unit: mm)

Plastic surface mounted package

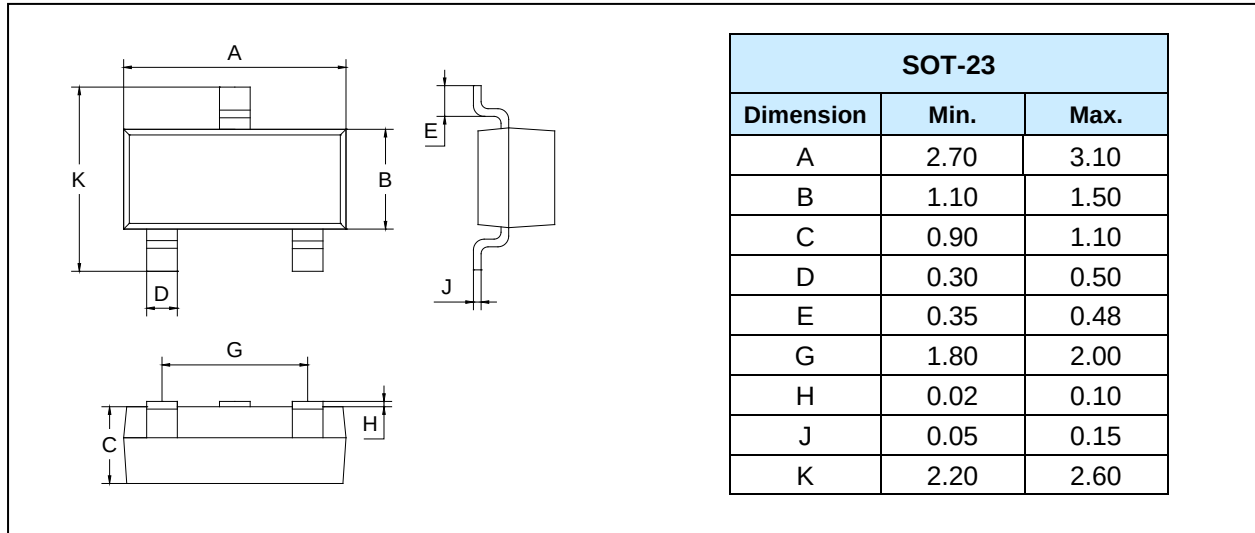

MOUNTING PAD LAYOUT (Unit: mm)

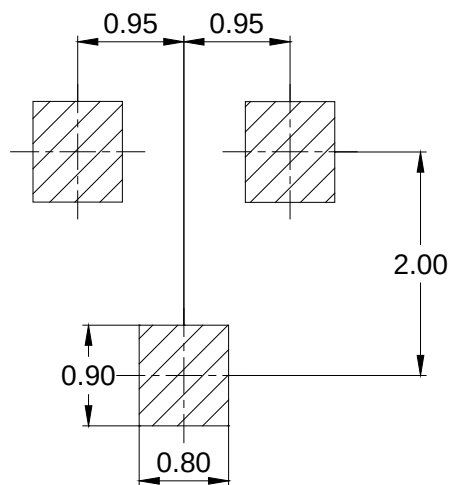

PACKAGE INFORMATION

Part Number	Package	Shipping Quantity
BZX84C2V0 - BZX84C75	SOT-23	3000pcs / Tape & Reel

SMT-Type Zener Diode**BZX84C2V0 - BZX84C75**

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.