


Features

- Low turn-on voltage
- Fast switching
- PN junction guard ring for transient and ESD protection

HF

Mechanical Data

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

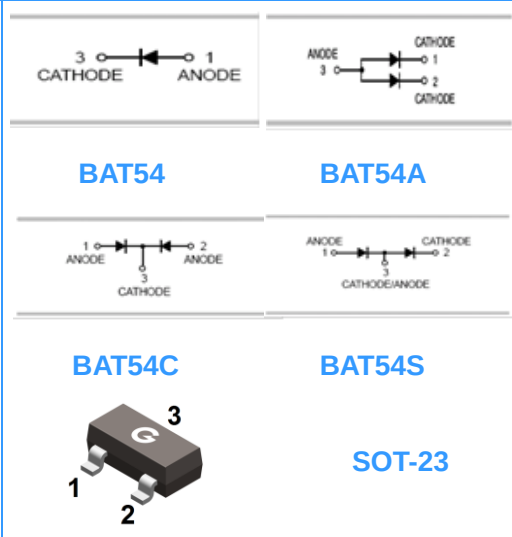

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BAT54	SOT-23	3000 pcs / Tape & Reel	KL1
BAT54A	SOT-23	3000 pcs / Tape & Reel	KL2
BAT54C	SOT-23	3000 pcs / Tape & Reel	KL3
BAT54S	SOT-23	3000 pcs / Tape & Reel	KL4

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Peak Reverse Voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}	30	V
DC Reverse Voltage	V _R	30	V
Forward Continuous Current	I _F	200	mA
Repetitive Peak Forward Current	I _{FRM}	300	mA
Non-repetitive Forward Surge (t _p = 1s)	I _{FSM}	600	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	250	mW
Thermal Resistance Junction-to-Air *1	R _{θJA}	280	°C/W
Thermal Resistance Junction-to-Case *1	R _{θJC}	190	°C/W
Thermal Resistance Junction-to-Lead *1	R _{θJL}	200	°C/W
Operating Junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	30	-	-	V
Forward Voltage ^{*2}	V_F	$I_F = 0.1\text{mA}$	-	-	0.24	V
		$I_F = 1\text{mA}$	-	-	0.32	V
		$I_F = 10\text{mA}$	-	-	0.40	V
		$I_F = 30\text{mA}$	-	-	0.50	V
		$I_F = 100\text{mA}$	-	-	0.80	V
Maximum Peak Reverse Current ^{*3}	I_R	$V_R = 25\text{V}$	-	-	2	μA
Junction Capacitance	C_J	$V_R = 1\text{V}, f = 1\text{MHz}$	-	-	10	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	-	5	ns

Notes:

1. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper
2. Pulse test, $t_p \leq 300\mu\text{s}$
3. Pulse test, $t_p \leq 5\text{ms}$

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

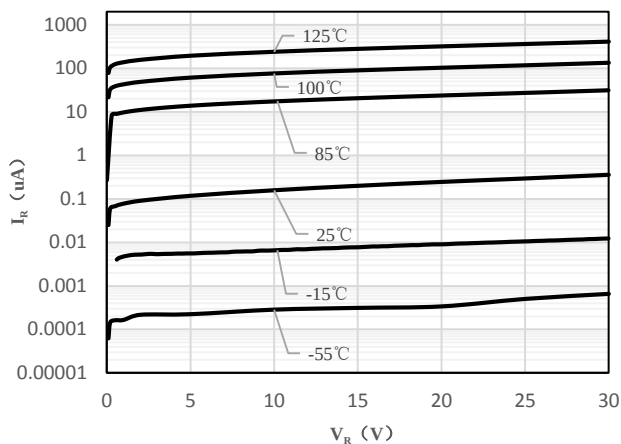


Fig 1 Typical Reverse Characteristic

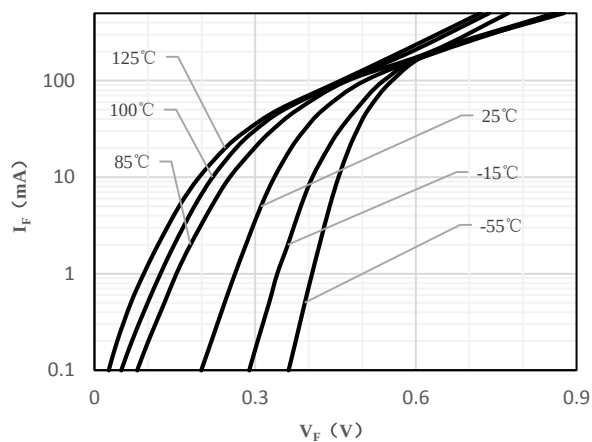


Fig 2 Typical Forward Characteristics

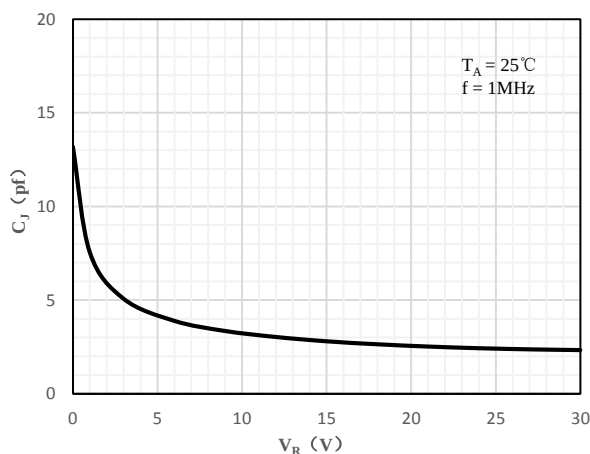


Fig 3 Capacitance Characteristics


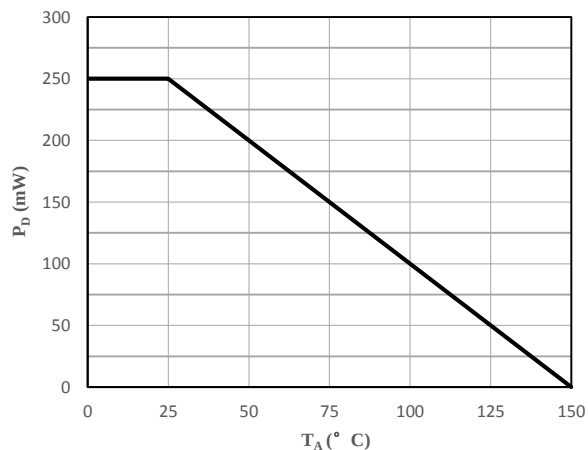


Fig 4 Power Derating Curve


Package Outline Dimensions (Unit: mm)

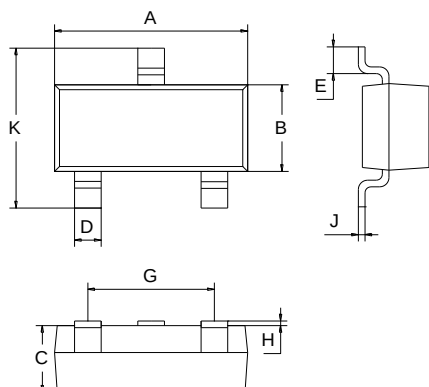

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

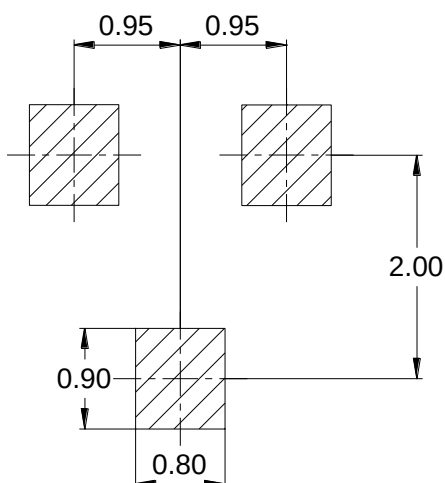

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.