




Remote Power – Dual Port, NJ Package 10/100BASE-TX Magnetic Modules


HALO
ELECTRONICS, INC.

HALO Electronics offers a complete family of dual port, "Remote Power", solutions. Available in both commercial and industrial temperature ranges. Designed to meet the requirements of IEEE802.3af with 350 mA current capability.


NJ Package

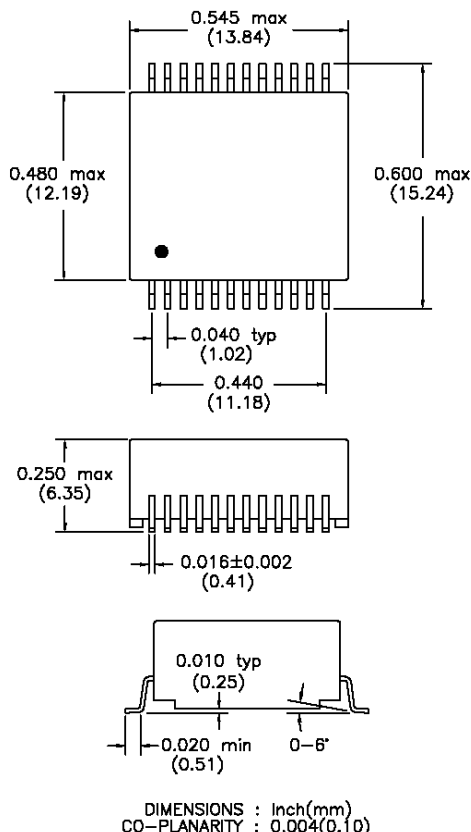

Circuit Diagram A

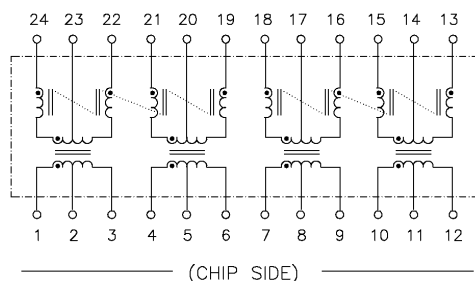

Circuit Diagram B

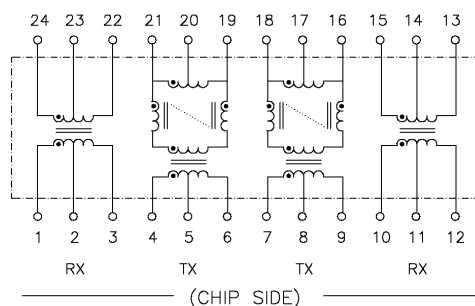

Patented Construction, Pat. No. 5,656,985

Electrical Specifications @ 25°C

Isolation Voltage: 1,500Vrms
Turns Ratio, TX & RX: 1CT:1CT
Insertion Loss (0.1-100MHz): -1.1dB max
OCL @100KHz, 8mA: 350μH min
(over full temp. range)

Return Loss

0.5-30MHz: -18dB min
40MHz: -15.5dB min
50MHz: -13.6dB min
60-80MHz: -12dB min

Part Number	Temp Range	PRI/SEC Cw/w (pF typ)	PRI DCR ((max)	CMR (.1-100MHz)	Crosstalk (1-100MHz)	Schematic
TG110-RP06NJ	0 to 70C	25	0.9	-38dB typ	-38dB typ	A
TG110-RP07NJ	0 to 70C	25	0.9	-40dB typ*	-40dB typ	B
TG110-RPE12NJ	-40 to +85C	25	1.0	-38dB typ	-38dB typ	A

*TX only