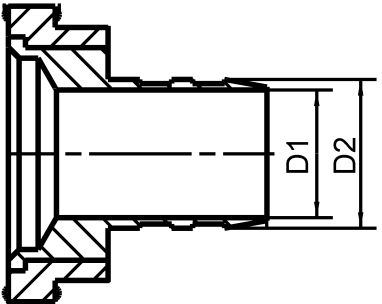
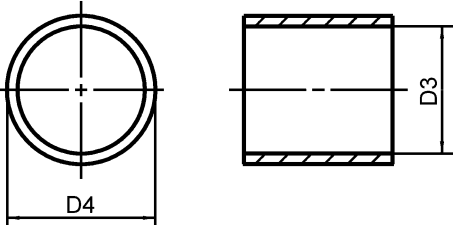


Details

HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.

Modu-
lar

Identification	Inner diameter	Outer diameter	Part number	Drawing (dimensions in mm)
D-Sub , Crimp flange, D-Sub 9 ... 37	3 mm	4 mm	61 03 000 0062	 D1 = Inner diameter D2 = Outer diameter
	3.5 mm	4.5 mm	61 03 000 0063	
	4 mm	5 mm	61 03 000 0064	
	4.5 mm	5.5 mm	61 03 000 0065	
	5 mm	6 mm	61 03 000 0066	
	5.5 mm	6.5 mm	61 03 000 0166	
	6 mm	7 mm	61 03 000 0067	
	6.5 mm	7.5 mm	61 03 000 0068	
	7 mm	8 mm	61 03 000 0069	
	7.5 mm	8.5 mm	61 03 000 0070	
	8 mm	9 mm	61 03 000 0071	
	8.5 mm	9.5 mm	61 03 000 0165	
	9 mm	10 mm	61 03 000 0072	
D-Sub , Crimp ferrule	5 mm	6 mm	61 03 000 0045	 D4 = Outer diameter D3 = Inner diameter
	5.5 mm	6.5 mm	61 03 000 0046	
	6 mm	7 mm	61 03 000 0047	
	6.5 mm	7.5 mm	61 03 000 0048	
	7 mm	8 mm	61 03 000 0049	
	7.5 mm	8.5 mm	61 03 000 0050	
	8 mm	9 mm	61 03 000 0051	
	8.5 mm	9.5 mm	61 03 000 0052	
	9 mm	10 mm	61 03 000 0053	
	9.5 mm	10.5 mm	61 03 000 0054	
	10 mm	11 mm	61 03 000 0055	
	10.5 mm	11.5 mm	61 03 000 0056	
	11 mm	12 mm	61 03 000 0057	
	11.5 mm	12.5 mm	61 03 000 0058	
	12 mm	13 mm	61 03 000 0142	
	12.5 mm	13.5 mm	61 03 000 0059	
	13 mm	14 mm	61 03 000 0127	
	13.7 mm	15 mm	61 03 000 0060	
	14 mm	15 mm	61 03 000 0061	