


Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO
R

A
B
C
D
E
F

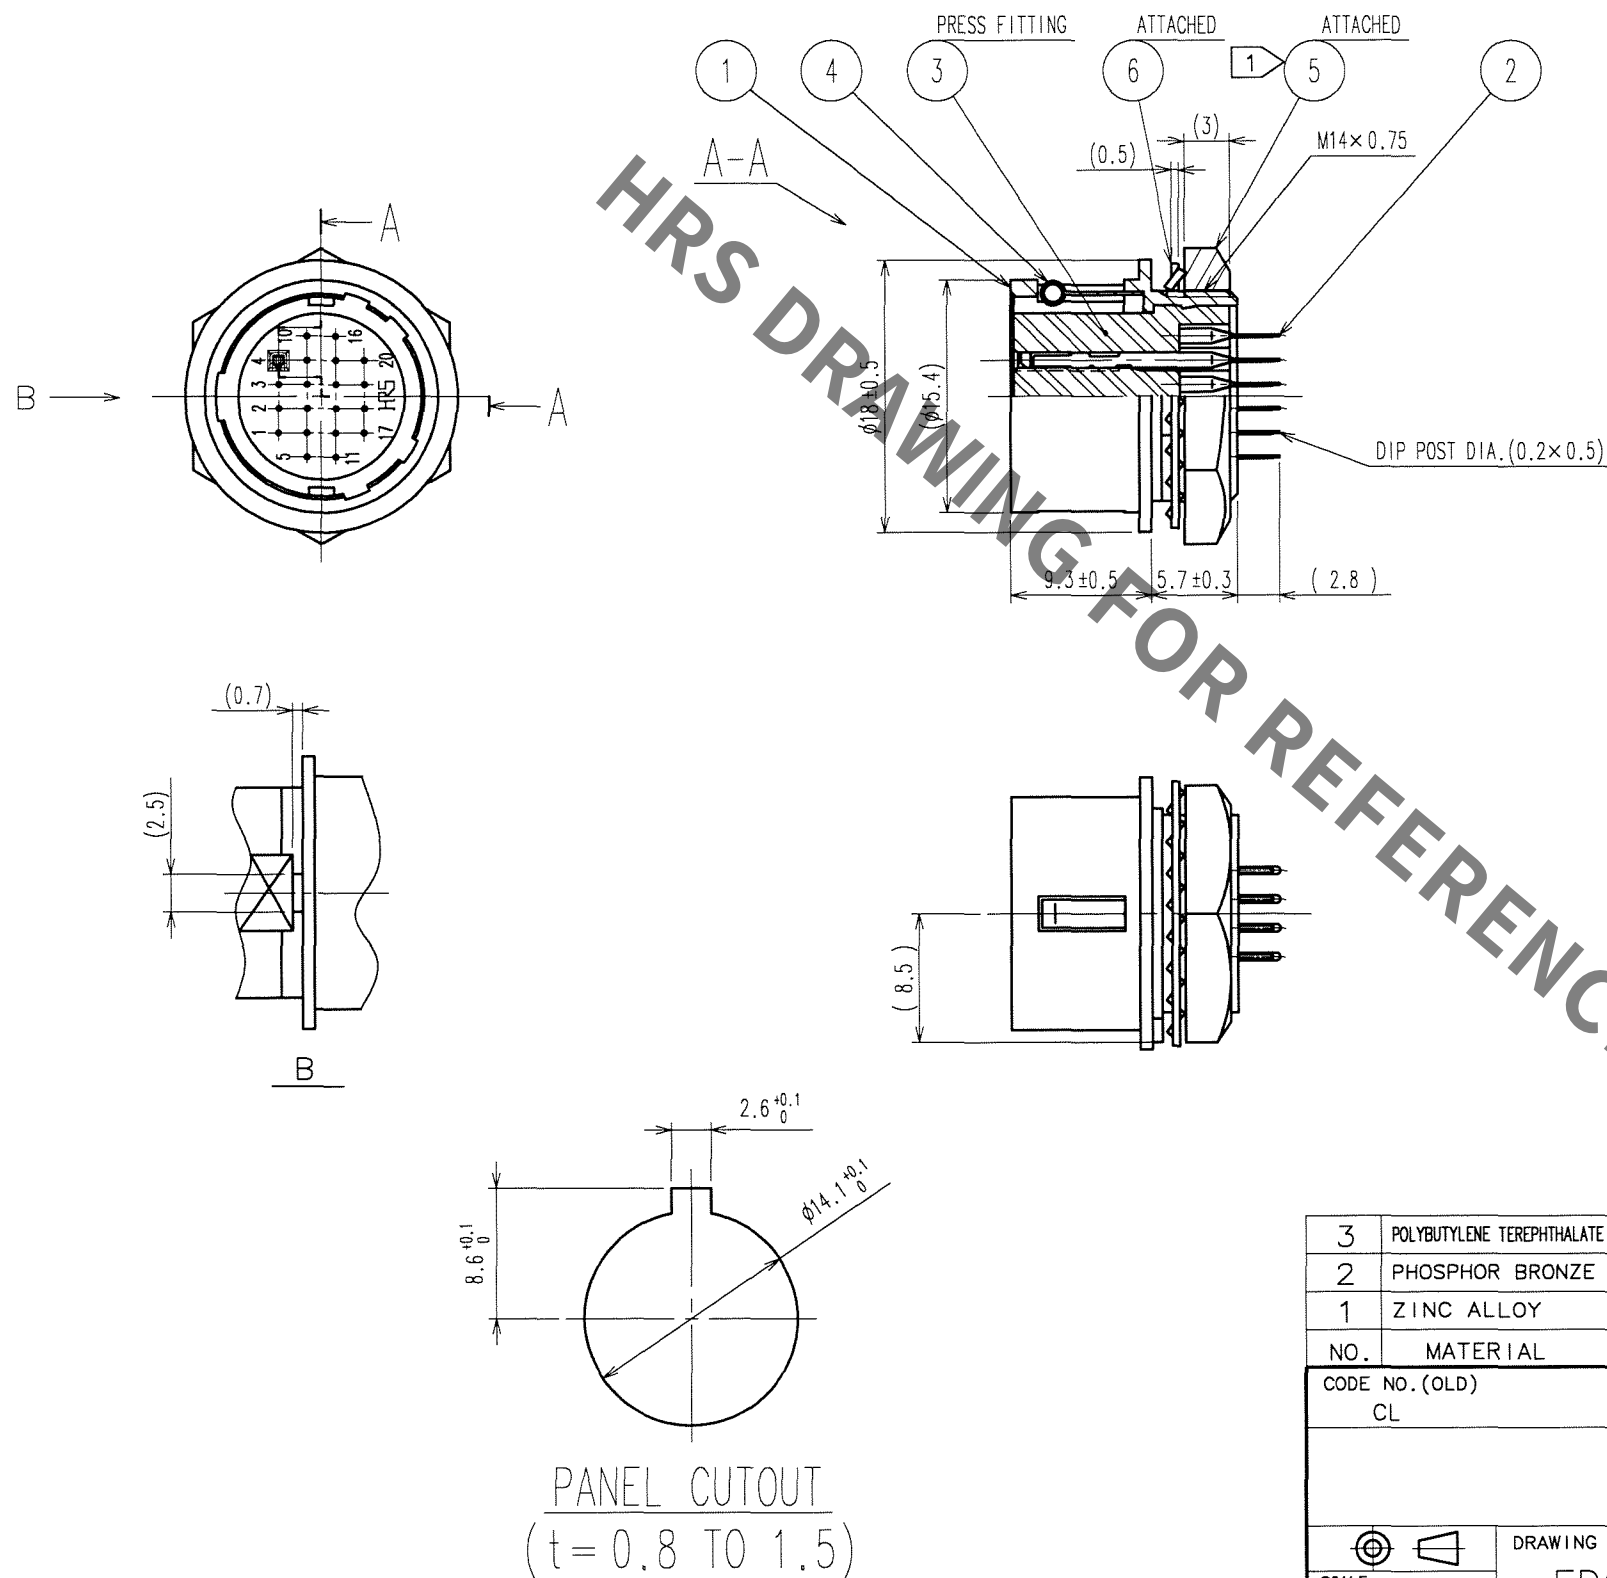

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1					1				
2					2				
3					3				

NOTE 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑤ : 2 TO 2.5N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑤ FOR LOOSENING.

3	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING		
2	PHOSPHOR BRONZE	SILVER PLATING 2μ m min.	5	BRASS	NICKEL PLATING		
1	ZINC ALLOY	MATTE FINISH NICKLE PLATED	4	STAINLESS STEEL			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			M. Sato	M. Sato	M. Sato	M. Sato	
			07.03.16	07.03.20	07.03.20	07.03.20	
			DRAWING NO.		PART NO.		
SCALE 2 : 1			EDC3-026771-73		HR10A-13R-20SB(73)		
UNITS mm			HRS HIROSE ELECTRIC CO., LTD		CODE NO. CL110-0707-7-73		
					1/1		

A
B
C
D
E
F