

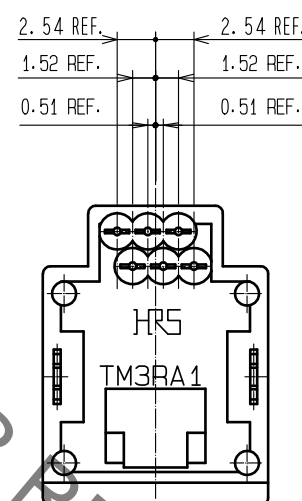
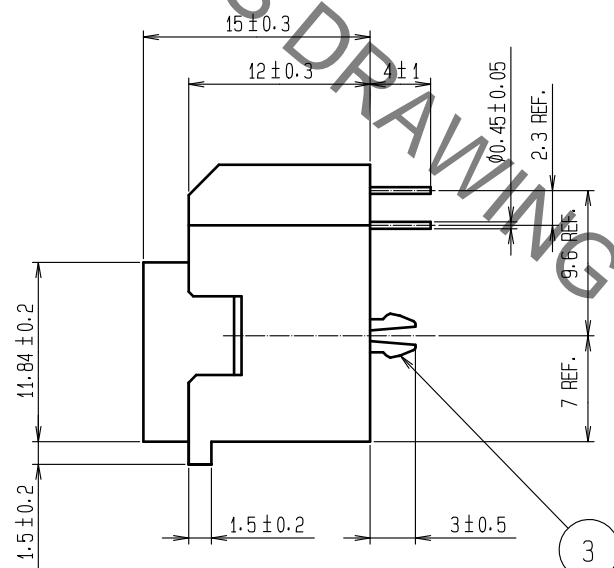
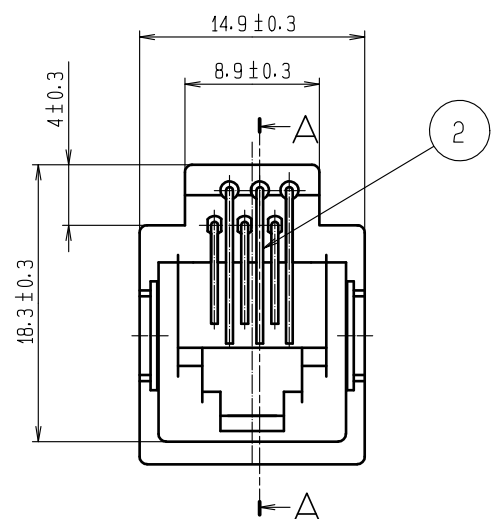



Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

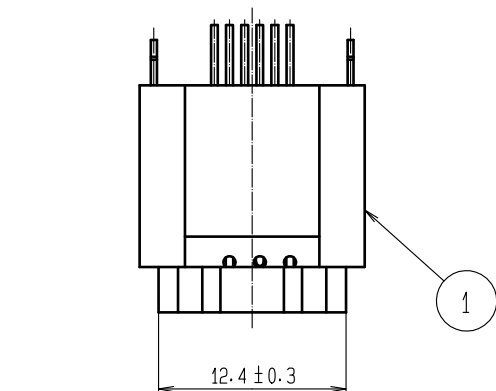

1 RECOMMENDED PC BOARD
PATTERN (4:1)
t=1.6

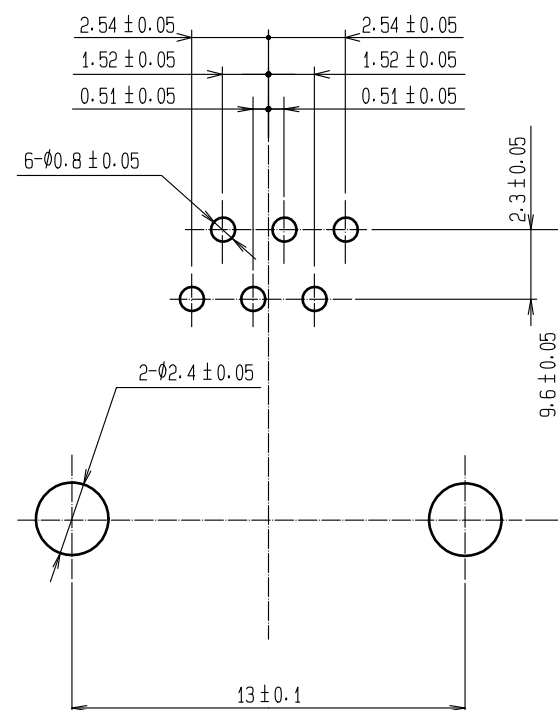


A-A



NOTE 1 PC BOARD DIMENSIONS ARE VIEWED FROM
THE CONNECTOR MOUNTING SURFACE ON PCB.

2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 1.27µm min LEAR: GOLD PLATING 0.03µm min UNDER: NICKEL PLATING 1.27µm min	5	STYRENIC-BASED ELASTOMERS	BLUE
			4	RIGID POLYVINYLCHLORIDE	CLEAR
1	PBT	BLACK, UL94V-0	3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1µm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2:1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU	16.03.31	DRAWING NO.	EDC-025818-67-00
		CHECKED : NM. NISHIMATSU	16.03.31	PART NO.	TM3RA1-66(67)
		DESIGNED : TS. ITO	16.03.31	CODE NO.	CL222-1377-8-67
		DRAWN : TS. ITO	16.03.31		
		DESIGNED	CHECKED	DATE	

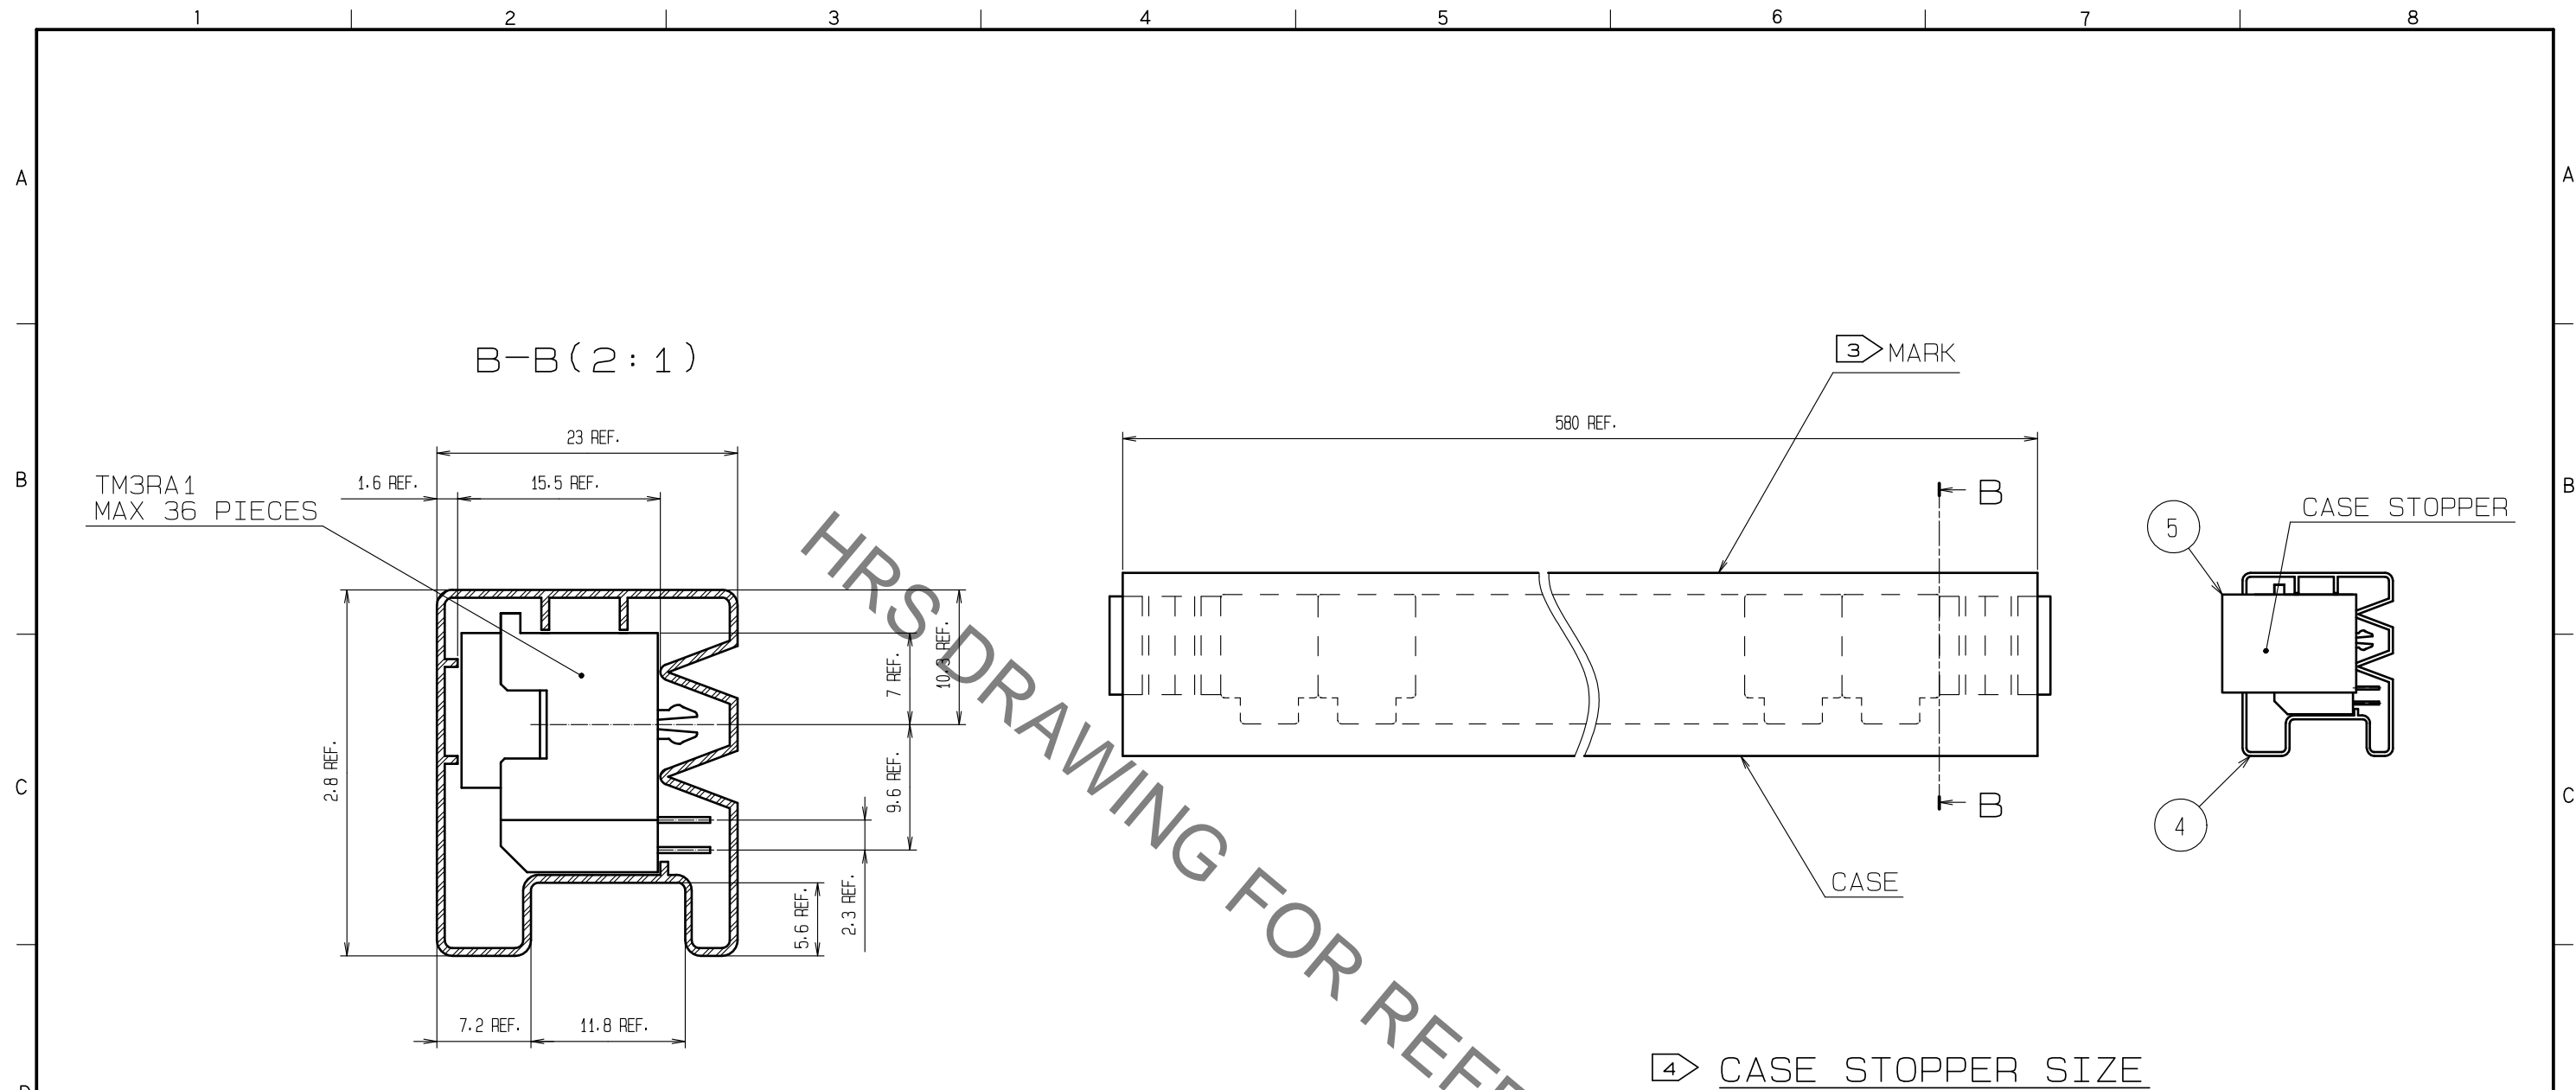

NOTES 2. CASE THICKNESS TO BE 0.6

3) BELOW INDICATION IS PRINTED ON TOP OF THE STICK PACKAGE.
PLEASE HELP US TO RECYCLE THE RESOURCE BY RETURNING THE PACKAGE.

TM3RA1シリーズ ヒロセ電機株式会社 空チューブの回収に御協力下さい。

4 INSERT THE STOPPERS TO EACH STICK PACKAGE END TO FIX AFTER PACKING SPECIFIED QUANTITY OF THE CONNECTOR.

