


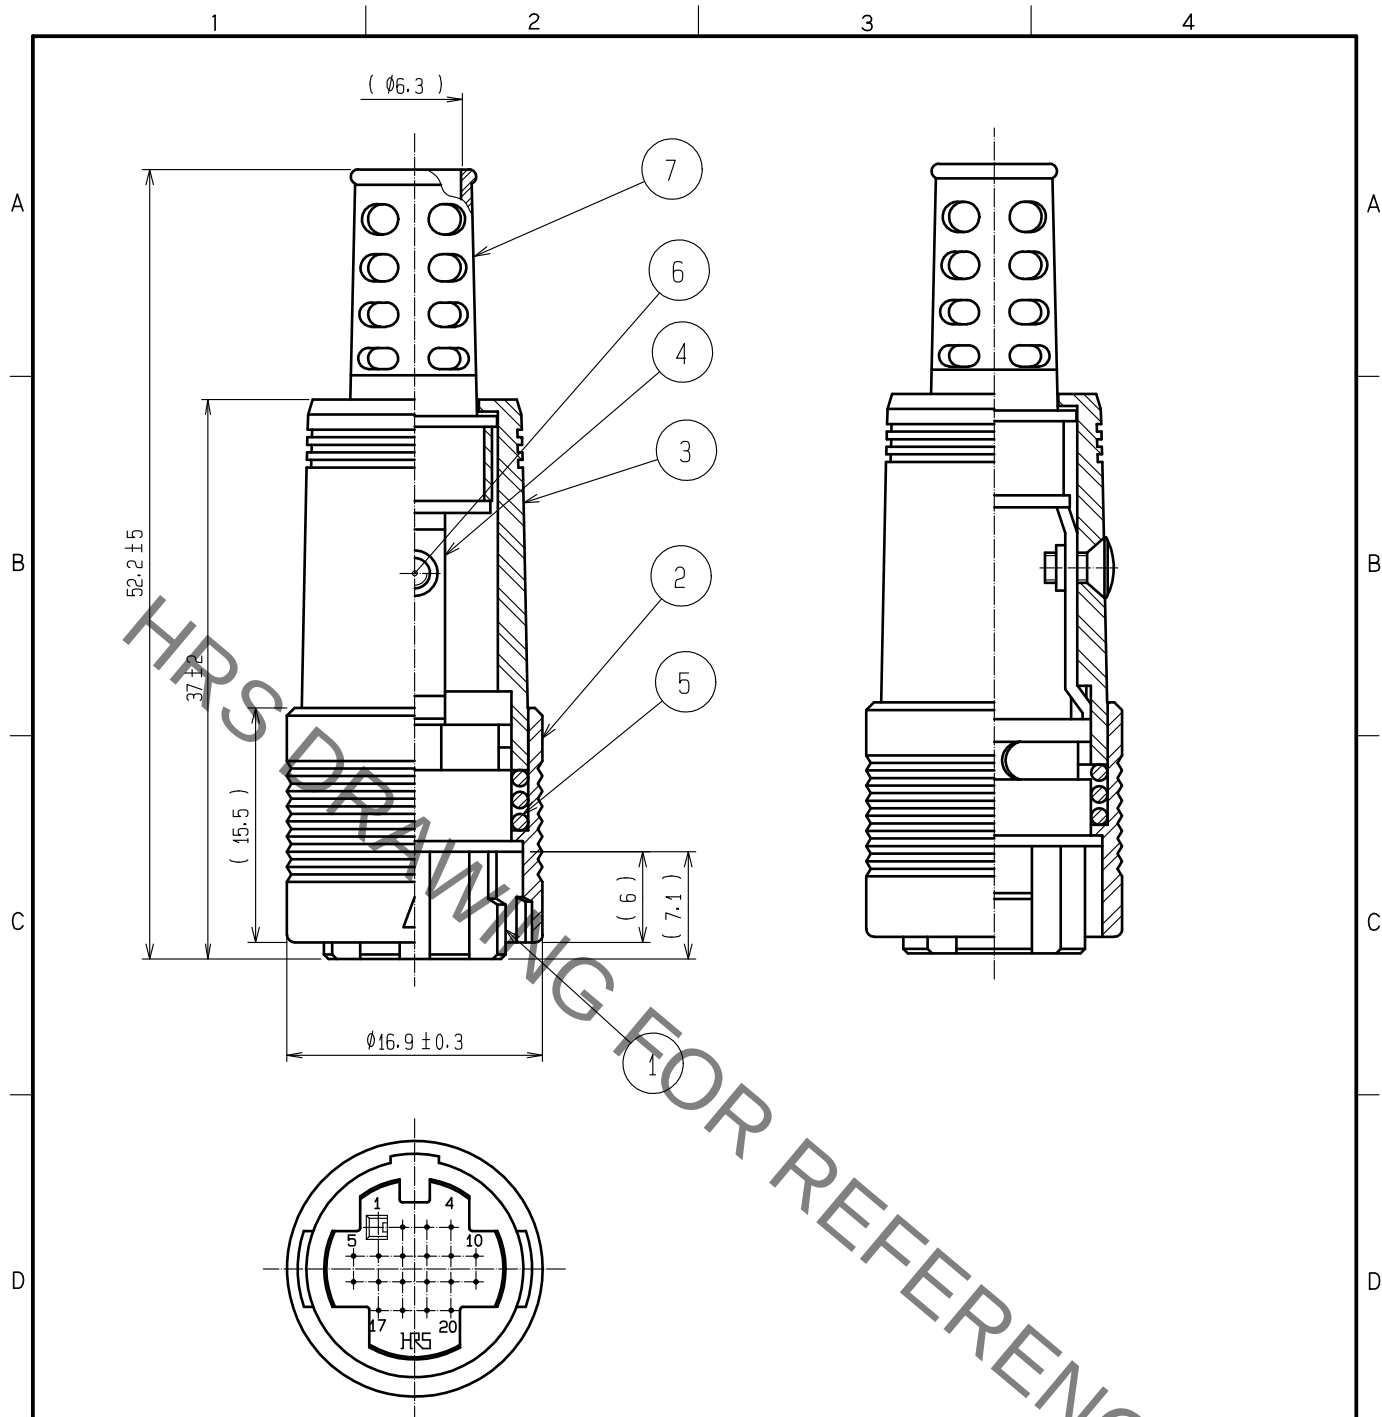

- Notes
- 1 Applicable crimping contact : RP19-SC-222(CL113-0266-2)
(Applicable wire :AWG #24 to #30)
 - ① 2 Applicable crimp contact extraction tool : RP6-SC-TP(CL150-0039-0)
 - 3 This product is delivered disassemble.
 - 4 The cable pull and twisting strength and other characteristics may differ.
Depending on the cable structure. please confirm before the use.

4	Brass							
3	Polycarbonate	(Black)	UL94V-0	7	Flexible polyvinylchloride	(Black)		
2	Polycarbonate	(Black)	UL94V-0	6	Brass	Black chromate treatment(Trivalent chromium) JIS B1111 M2×0.4×4		
1	Polycarbonate	(Black)	UL94V-0	5	Steel	Nickel plating		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT ① 1	DESCRIPTION OF REVISIONS DIS-C-00001221		DESIGNED MM. ISHII	CHECKED EJ. KUNII	DATE 16.10.18
HRS HIROSE ELECTRIC CO., LTD.		APPROVED :MR. YOSHIDA		05.01.05	DRAWING NO. EDC4-022069-71			
		CHECKED :MO. SATOH		05.01.05	PART NO. RP13A-12PD-20SC(71)			
		DESIGNED :YH. YAMADA		05.01.05	CODE NO. CL113-0214-9-71			
		DRAWN :YH. YAMADA		05.01.05	① 1/1			