




	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△						△				
△						△				
△						△				

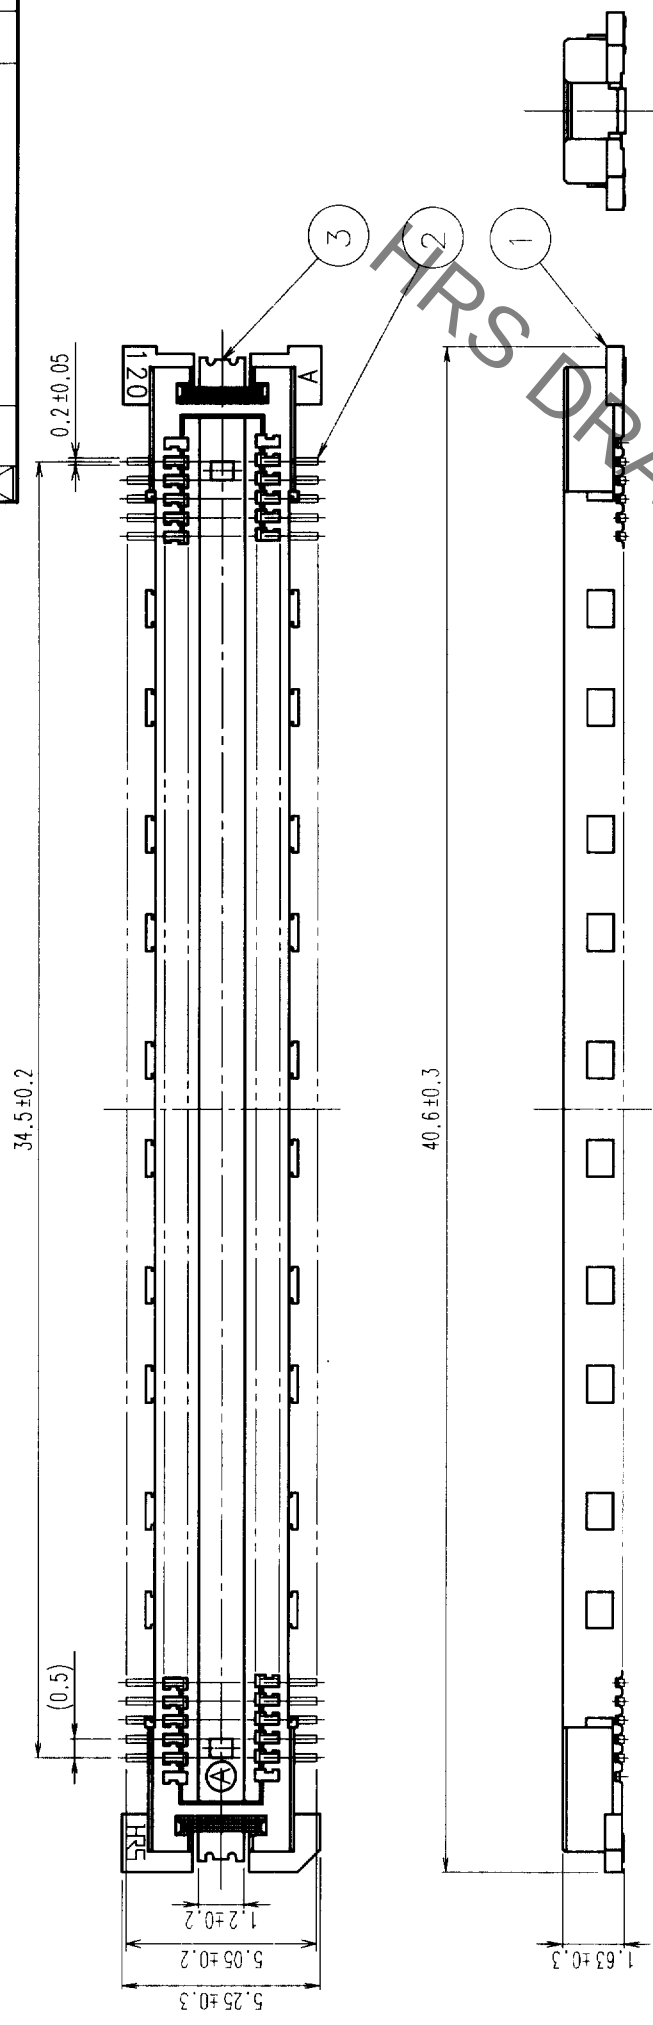

RECOMMENDED LAND PATTERN DIMENSION OF POB

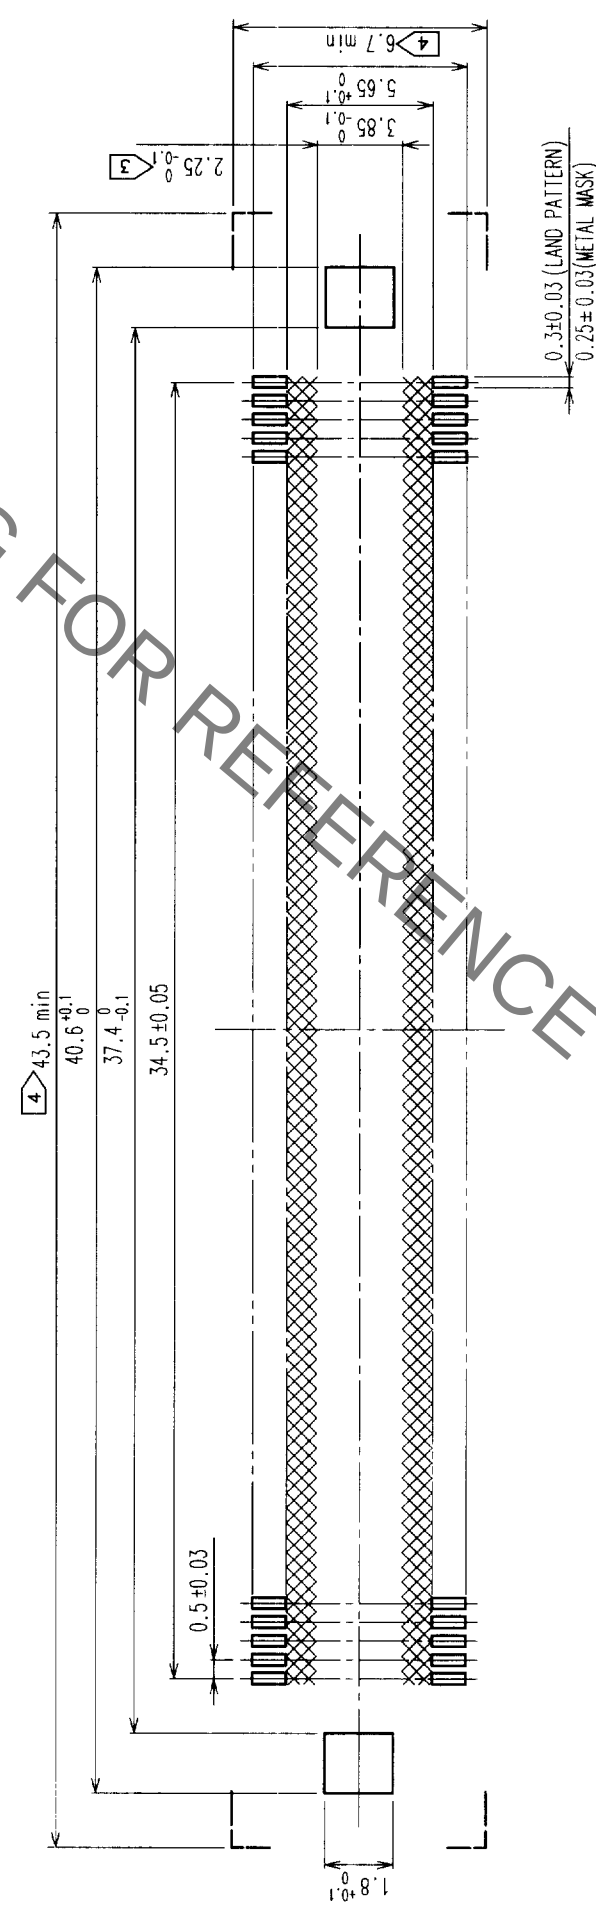

SIGNAL PORTION CROSS SECTION (10:1)

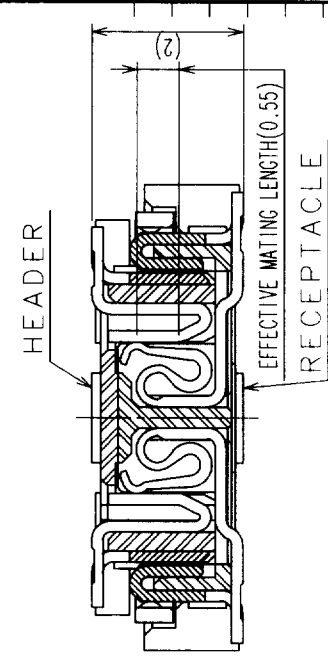

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL
---	--------------	--

1	LCP	BEIGE	UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		J. R. Wickham 4/27/62	J. R. Wickham 4/27/62	M. S. Sledge 4/27/62	J. Goodman 4/27/62	

 SCALE	 DRAWING NO.	PART NO.	
		FX11LB-140P-SV (22)	


UNITS		mm	
3 : 1		mm	
HRS		HIROSE ELECTRIC CO., LTD.	
CODE NO.		CL573-0055-3-22	
1		2	

NOTES



- 1 SMT LEAD-COPLANARITY:0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
- 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
- 4 DO NOT MOUNT OTHER DEVICES ONTO  AREA ,OR MATING PAIR CANNOT BE MATED.
- 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

TO	PCK			
----	-----	--	--	--

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

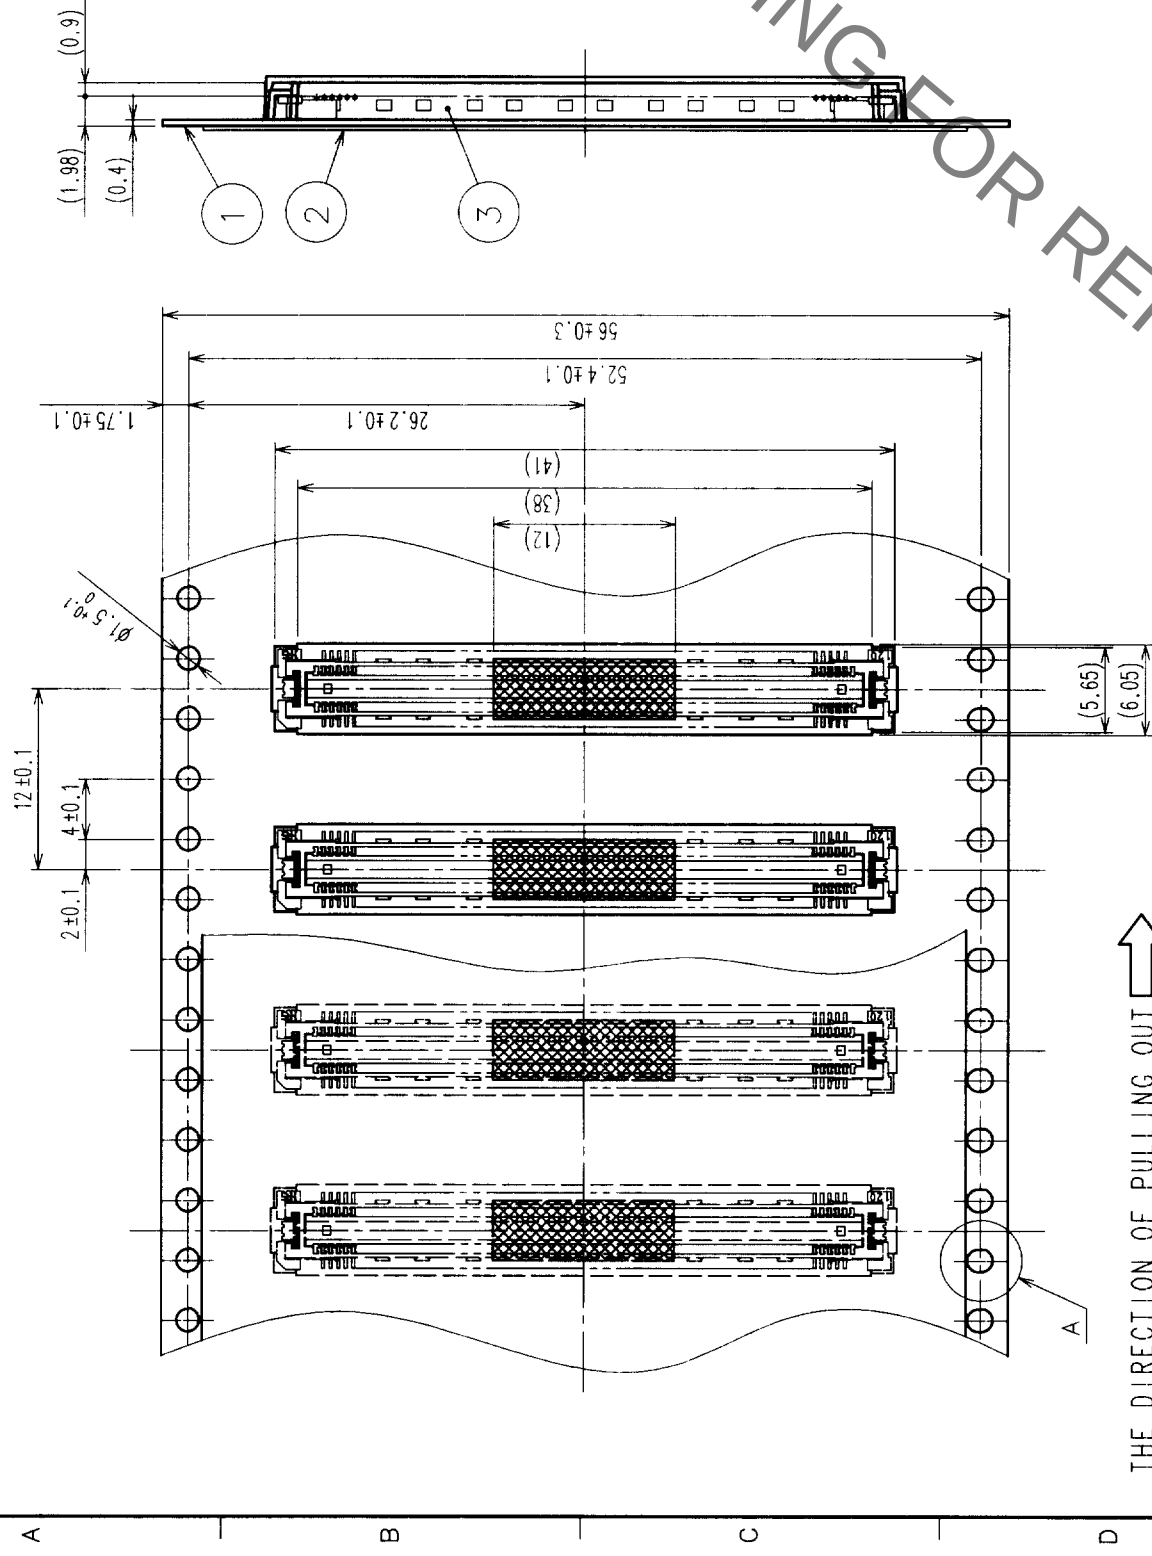


THE DIRECTION OF PULLING OUT 

$$A(5:1)$$


DETAIL FOR VACUUM PICKUP (5:1)

NOTES 1 1 REEL: 1000 CONNECTORS.
2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.

2	PET	TOP COVER TAPE	4	POLYIMIDE	(TAPE FOR VACUUM PICKUP)	
1	PS	EMBOSSED CARRIER TAPE	3	(CONNECTOR)		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWING NO.	DRAWN	DESIGNED	CHECKED	APPROVED
CL						
DRAWING FOR PACKING						
SCALE		EDC3-152107-02	PART NO.	FX11LB-140P-SV(22)		
2 : 1						
UNITS		HIROSE ELECTRIC CO., LTD	CODE NO.	CL573-0055-3-22		
mm						
		2				

TO	PCK			
----	-----	--	--	--