



TO
PCK


A
B
C
D
E
F

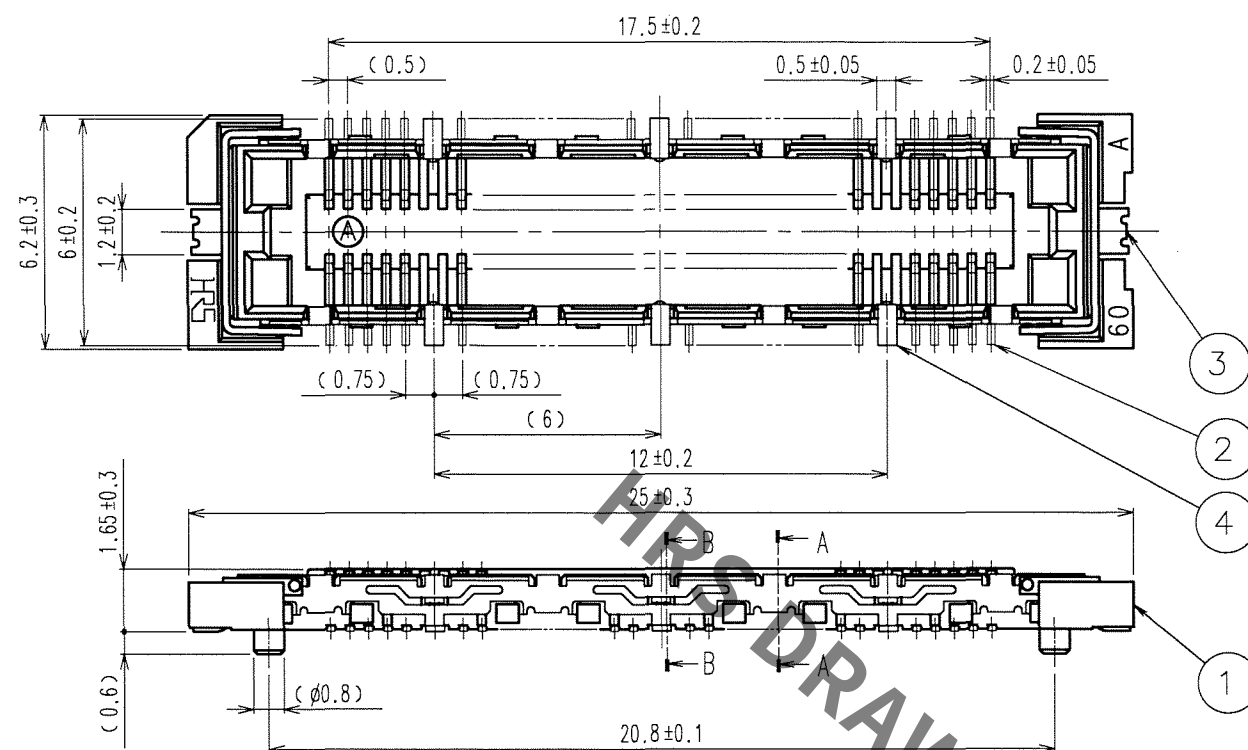


RECOMMENDED LAND PATTERN DIMENSION OF PCB

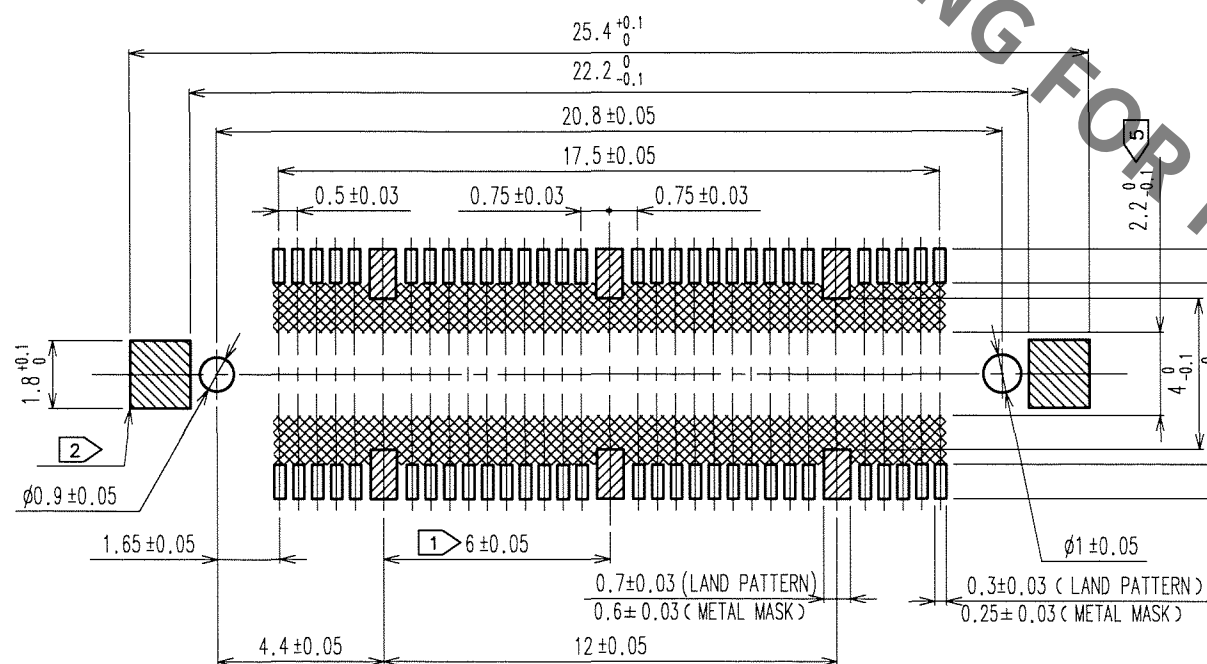

A-A (10:1)

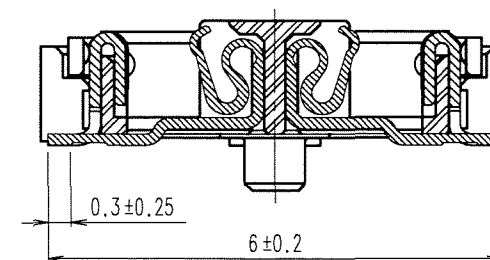

B-B (10:1)

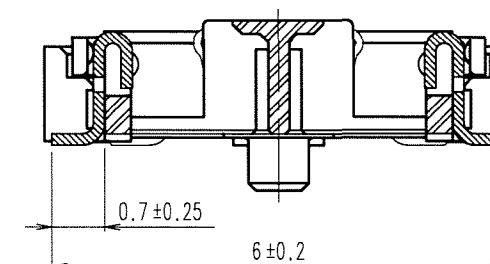

- NOTES
- 6 HATCHED PARTS: GROUND CIRCUIT.
 - 2 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

4	PHOSPHOR BRONZE	TIN-PLATING			2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.
3	PHOSPHOR BRONZE	TIN-PLATING					LEAD AREA: GOLD FLASH
1	LCP	BEIGE	UL94V-0				UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
CODE NO. (OLD) CL				DRAWN	DESIGNED	CHECKED	APPROVED
				A. SUZUKAWA	M. Nakamura	K. Ogawa	H. Okawa
				06.09.28	06.09.28	06.09.29	06.09.30
DRAWING NO. EDC3-152108-22				PART NO. FX11LA-60S/6-SV(92)			
SCALE 5 : 1				CODE NO. CL573-0102-1-92			
UNITS mm				HRS HIROSE ELECTRIC CO., LTD.			
				1/2			

Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

