

Apr.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

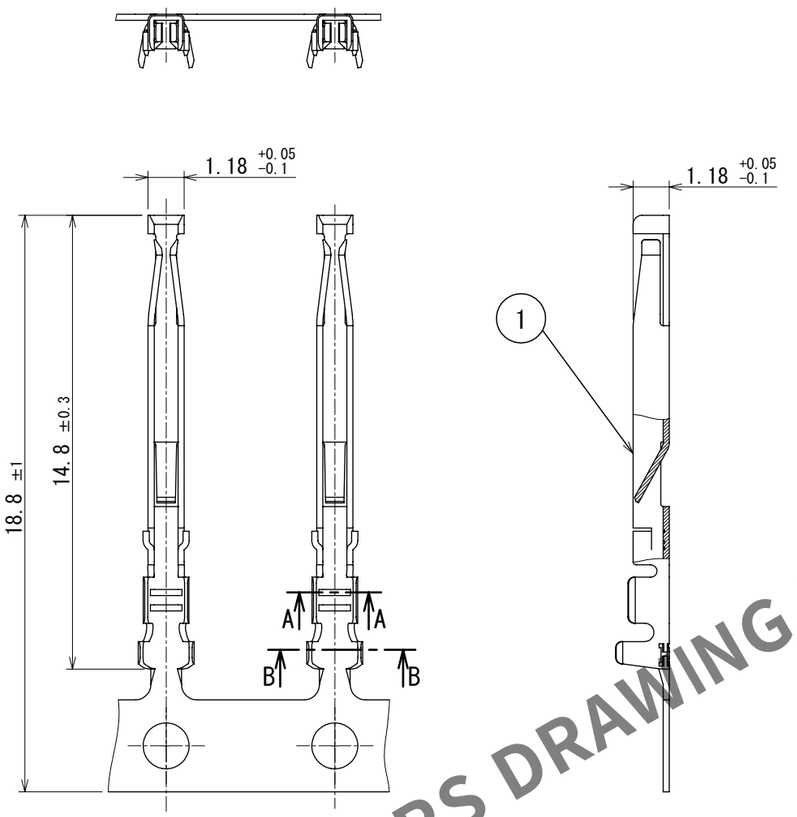

HRS DRAWING FOR REFERENCE

Reel (1 : 10)

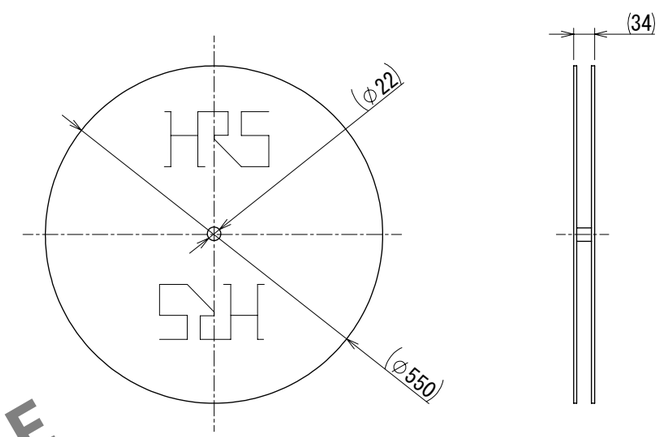

Notes 1 Applicable wire : AWG#24 to 28 (Insulation diameter : φ1.15 MAX)
2 Applicable crimp contact extraction tool : RP6-SC-TP (CL150-0039-0)
3 Per reel : 10,000 contacts

△3 CAD change

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
1	Phosphor bronze	Contact portion : Gold plating 0.2μm min. Underplating : Nickel plating 1μm min.			

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5:1	△3	1	DIS-C-00018212	TR. YAMANOUE	HY. KOBAYASHI	2024. 08. 23

HIROSE ELECTRIC CO., LTD.

APPROVED	TP. KOMATSU	2022. 05. 17
CHECKED	EJ. KUNII	2022. 05. 17
DESIGNED	SH. KOYAMA	2022. 05. 17
DRAWN	MK. WADA	2022. 05. 17

DRAWING NO.	EDC-396720-00-00
PART NO.	HR22-SC1-221
CODE NO.	CL0122-0095-0-00

△3 1/1