
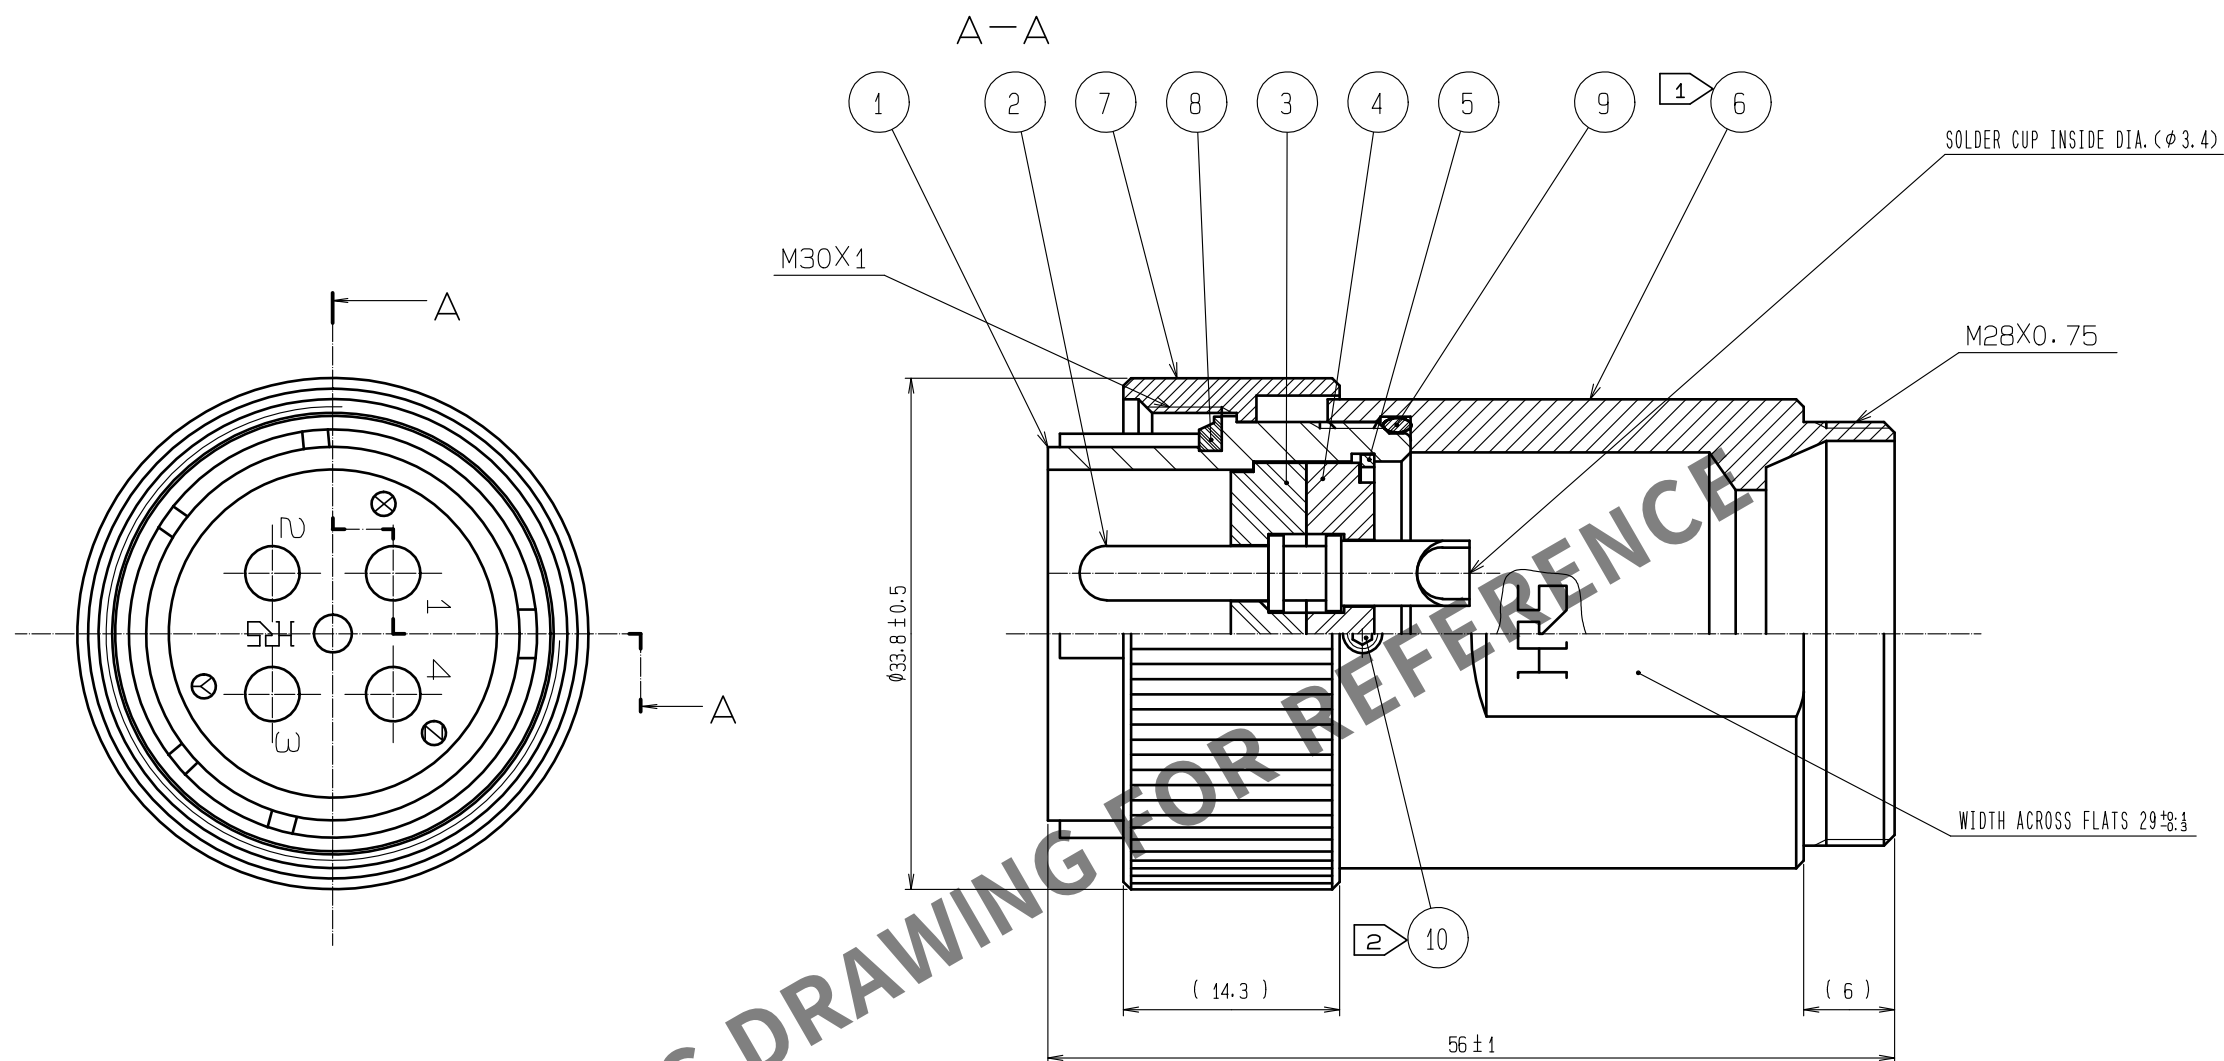


Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑥ SHALL BE 5 TO 5.5N · m.
 - 2 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑩ SHALL BE 0.2 TO 0.25N · m.
 - 3 LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ①, ⑥ AND ⑩ FROM LOOSENING.
 - 4 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑥ TO REF. NO. ① AND THE SOLDER CUP OF REF. NO. ② ARE SHOWN.
 - 5 THIS PRODUCTS TO BE USED WITH CABLE CLAMP, JR25WCC-*(72).
*DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.
THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.
 - 6 UL certified product(E52653).

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	HEX:1.27
4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	9	SILICONE RUBBER	(BLACK)
3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)
2	BRASS	SILVER PLATING 2μm min.	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm 	SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00003802	DESIGNED YS. NARA	CHECKED EJ. KUNII	DATE 20200129
	APPROVED : EJ. KUNII 20130909			DRAWING NO. EDC3-118115-00		
	CHECKED : HY. KISHI 20130909			PART NO. JR25WPH-4P		
	DESIGNED : HK. NAMAII 20130909			CODE NO. CL114-2185-0-00		
	DRAWN : HK. NAMAII 20130909			 1/1		

HR5

HIROSE
ELECTRIC
CO., LTD.