



Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	1	DIS-C-000585	T.K	E.K	07.07.27						

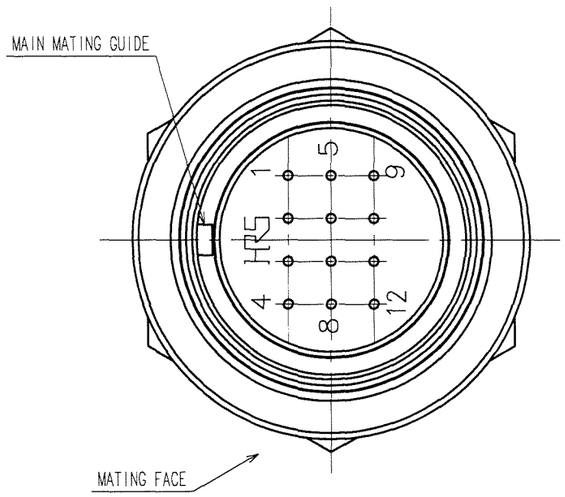


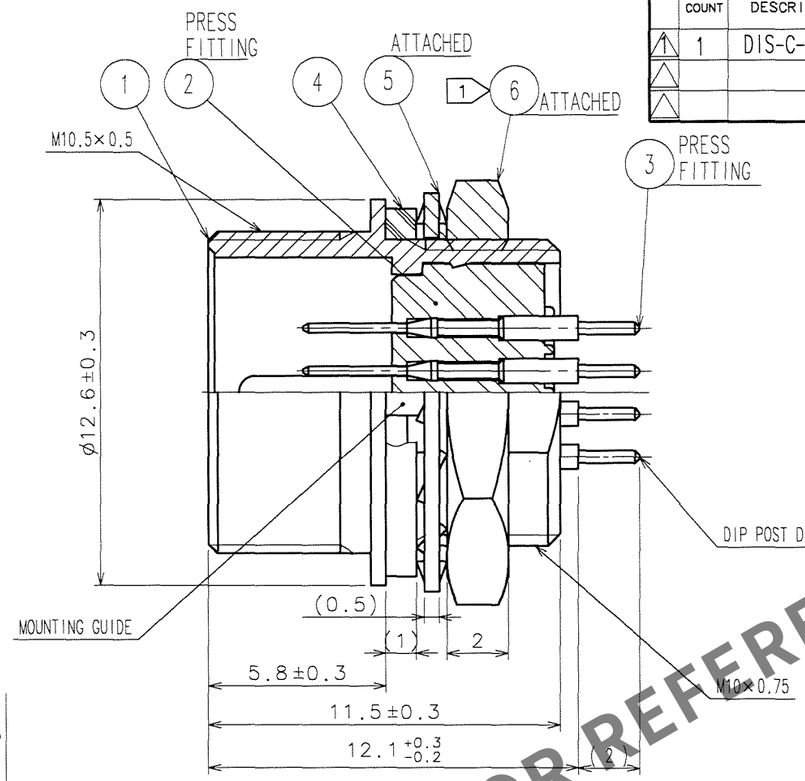

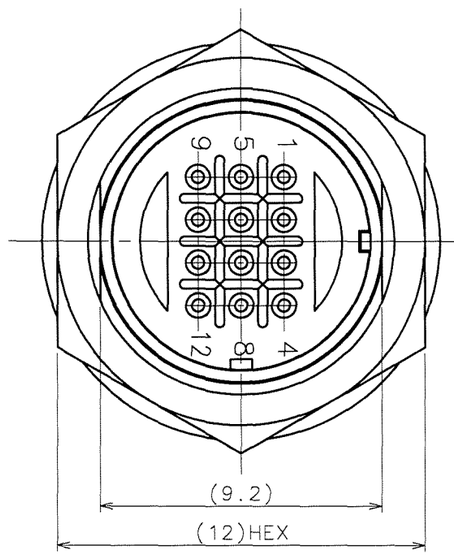


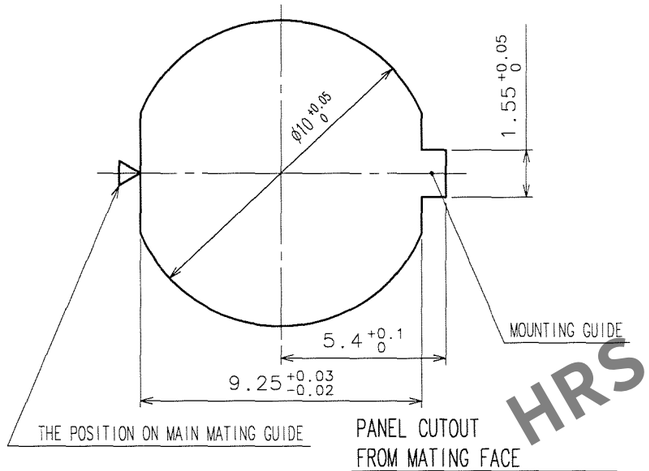


PANEL CUTOUT
FROM MATING FACE
PANEL THICKNESS: 0.7 TO 2

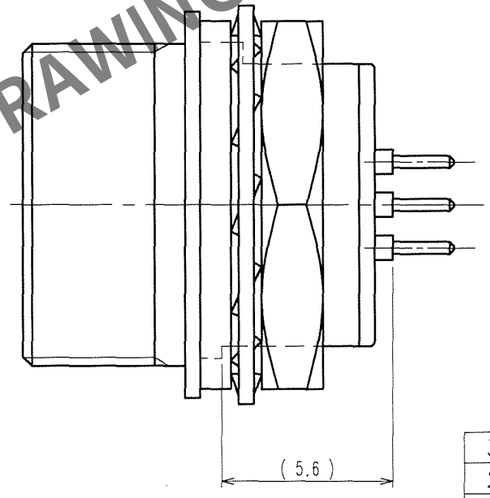

PANEL MOUNTED CONDITION

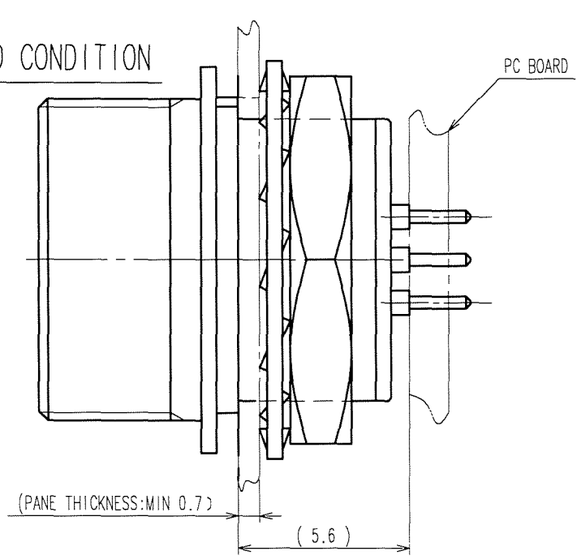

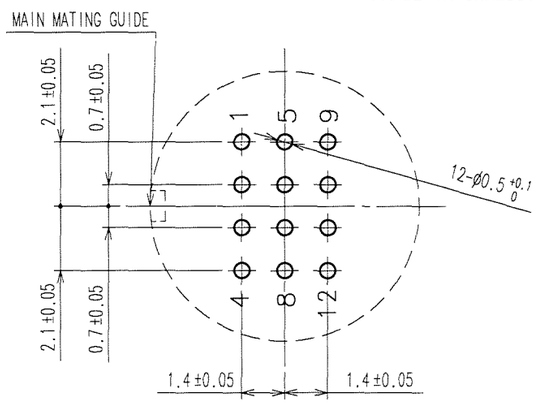

RECOMMENDED PC BOARD PATTERN
FROM MATING SIDE

NOTES 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No.⑥ TO BE 1.5 N·m.
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
2 OVER PLATING : GOLD 0.2μm min.
UNDER PLATING: NICKEL 2μm min.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	2	6	BRASS 1	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	ETHYLENE PROPYLENE RUBBER	(BLACK)

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	M.SATO '07 06 04	H.KAWASHIMA '07 06 04	Y.YAMADA '07 06 20	E.KUNII '07 06 22	. .

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-110160-71	HR25-9TR-12PA(71)
UNITS: mm	HIROSE ELECTRIC CO., LTD	CODE NO. CL125-0120-7-71 1/1

TO
R

HRS DRAWING FOR REFERENCE

FORM NO.229