

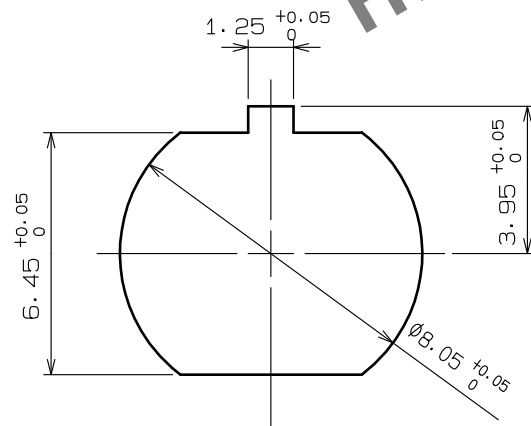
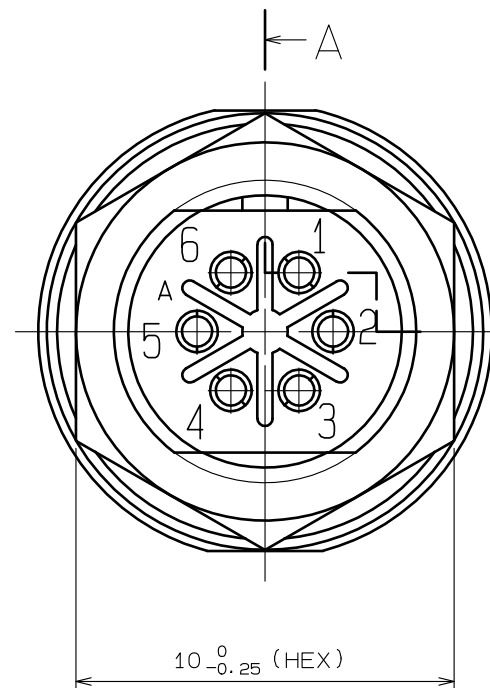


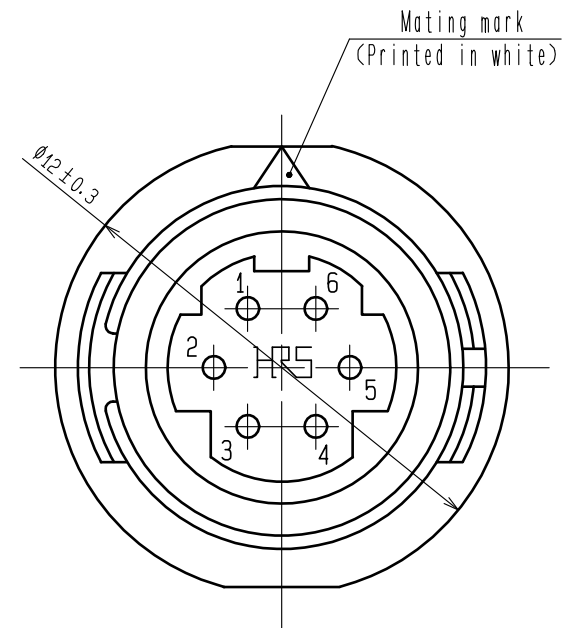

Solder pot inner($\phi 0.8$)

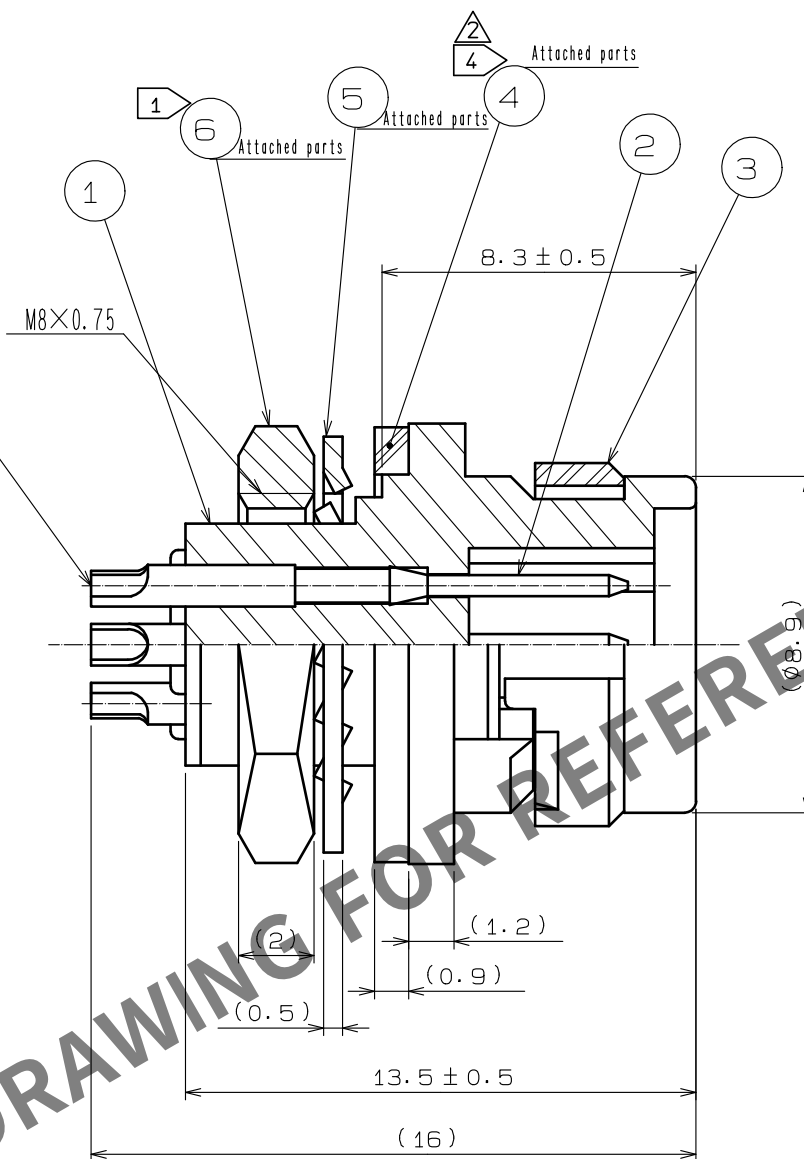

- Notes
- ① The recommended clamp torque of Ref. No. ⑥ to be 0.5N · m.
LOCTITE 263, LOCPRIMER 7649, ROCTITE JAPAN is recommended to prevent Ref. No. ⑥ from loosening.
 - ② Table for soldering is available HR30-6R-6P-T01.
 - ③ Surface plating: gold plating 0.2 μ m min.
Under plating: nickel plating 2 μ m min.
 - ④ When this connector is mounted on to panel, be careful Ref. No. ④ is assembled surely
Ref. No. ① as shown in this figure to keep waterproof effectiveness.
 - ⑤ The assembly of this product applies to the manual ETAD-C0302-00.

3	PPS	(Black)	6	Brass	Nickel plating
2	Brass	③	5	Phosphor bronze	Nickel plating
1	PPS	(Black) UL94V-0	4	CR	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-C-00014886	DESIGNED HY. KISHI
HIROSE ELECTRIC CO., LTD.		APPROVED : MR. YOSHIDA	20050105	DRAWING NO. EDC3-112023-71	DATE 20230328
		CHECKED : MO. SATOH	20050105	PART NO. HR30-6R-6P(71)	
		DESIGNED : YH. YAMADA	20050105	CODE NO. CL0130-1009-0-71	
		DRAWN : YH. YAMADA	20050105		