

Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


HRS DRAWING FOR REFERENCE


2 ATTACHMENT

JIS B 1188 : CROSS RECESSED NEED SCREWS WITH CAPTIVE WASHER
M4×0.7×16







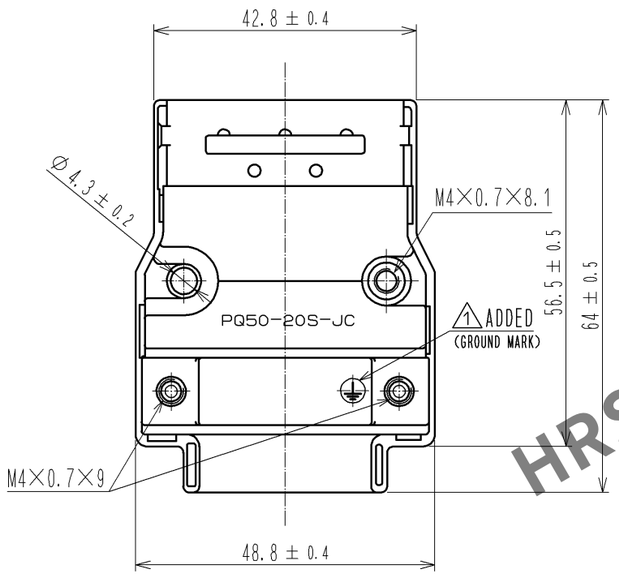

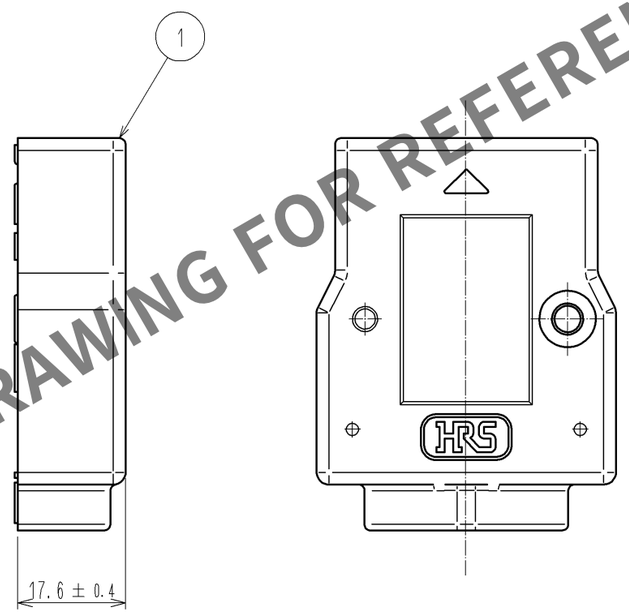

3 ELECTRODE TOUCHED AREA FOR RACK PLATING

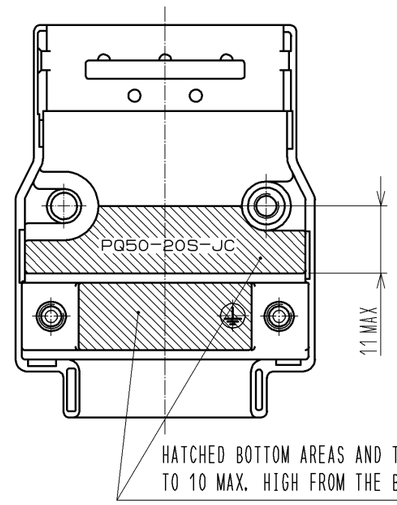

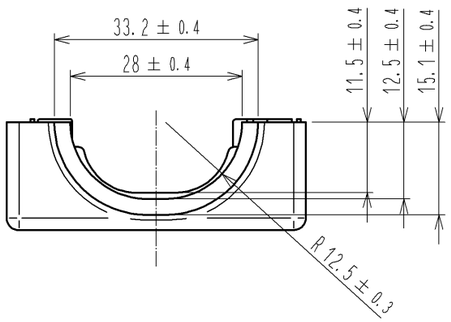

NOTE 1. REFER TO ETAD-E 2925 FOR THE APPLICABLE COMPONENTS ASSEMBLED WITH THIS PRODUCT.
2. SWELLING MAX 1.2mm DIA. AND 0.15mm HEIGHT COULD APPEAR ON THE SURFACE DUE TO DIE-CASTING, BUT IT DOESN'T AFFECT THE PERFORMANCE.
3 THE COLOR OF HATCHED AREA COULD BE DIFFERENT DUE TO THE RACK PLATING PROCESS. TOUCHING THE ELECTRODES TO THE SPECIFIED AREA, BUT IT DOESN'T AFFECT THE PERFORMANCE.
4. THIS PRODUCT IS AVAILABLE BY 100 pcs./box UNIT.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
1	ZDC2	SURFACE PLATING : NICKEL UNDER PLATING : COPPER	2	STEEL	SURFACE PLATING : NICKEL UNDER PLATING : COPPER

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	1 : 1	1	1	DIS-E-004870	TY. MIURA	AH. KODAMA	13.12.09

HIROSE ELECTRIC CO., LTD.

APPROVED	KN. ICHIKAWA	10.09.29
CHECKED	KN. ICHIKAWA	10.09.29
DESIGNED	TY. MIURA	10.09.29
DRAWN	TF. HIGASHIYAMA	10.09.25

DRAWING NO.	EDC3-126916-00
PART NO.	PQ50-20S-JC
CODE NO.	CL236-2002-3-00

1/1