



Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

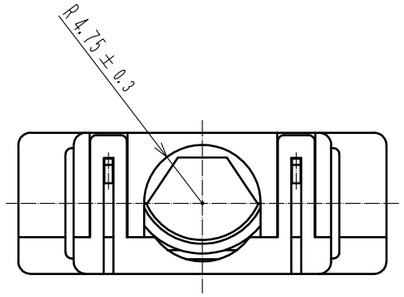


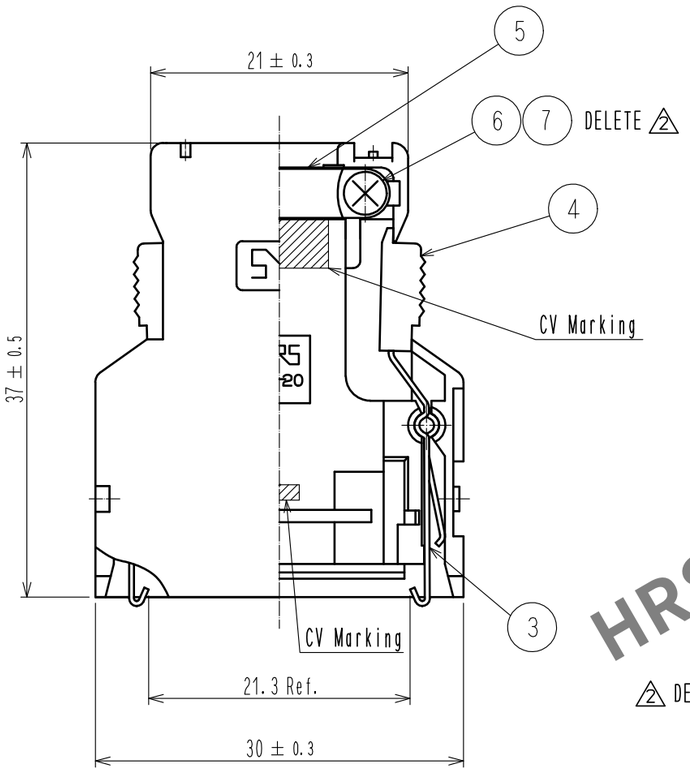

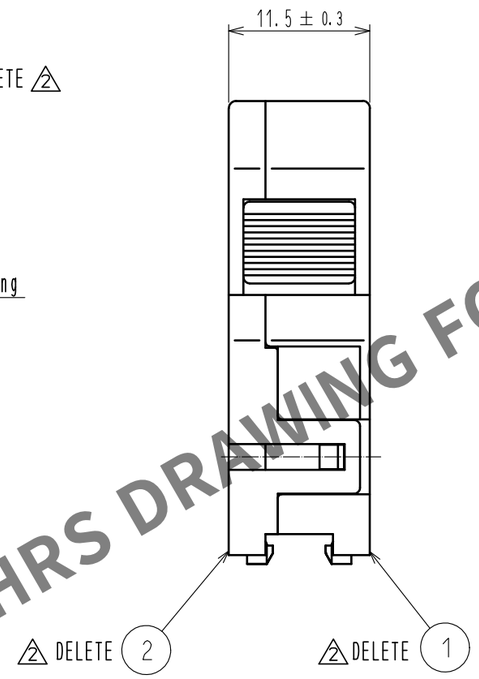

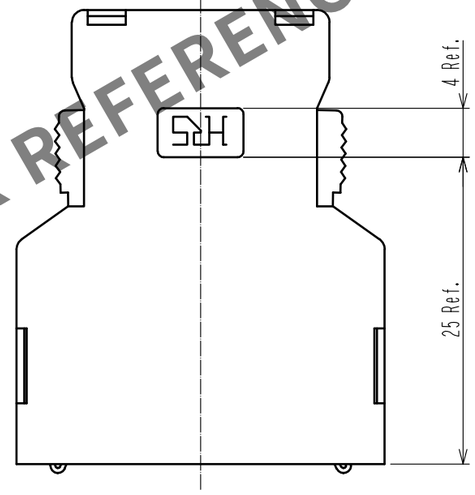

ASSEMBLED FIGURE

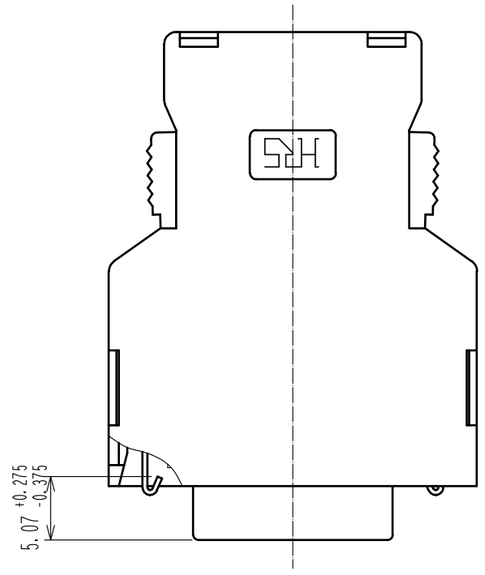

HRS DRAWING FOR REFERENCE

Note 1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co.,Ltd.). Except around the ditch of HRS mark.
△2 2. Part no. ①, ③, ④, ⑦ are assembled together as a unit. Part no. ②, ⑤, ⑥ are not assembled when delivered.
3. Outer diameter of applicable cable shall be φ8.5±0.5.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
4	Polycarbonate	Gray、UL94V-0			
3	Stainless steel		7	Brass	Nickel plating 0.8μm min.
2	Polycarbonate	Gray、UL94V-0	6	Brass	Nickel plating 0.8μm min.
1	Polycarbonate	Gray、UL94V-0	5	Stainless steel	

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△2	4	DIS-E-00009711	KG. OKITA	MN. KENJO	20220502

HIROSE ELECTRIC CO., LTD.

APPROVED	HO. MIWA	20051017	DRAWING NO. EDC-040857-60-01
CHECKED	YH. ENAMI	20051014	PART NO. FI-20-CV(60)
DESIGNED	TU. TANIGUCHI	20051014	
DRAWN	YK. SATO	20050907	CODE NO. CL0230-0501-4-60 △2 1/1