

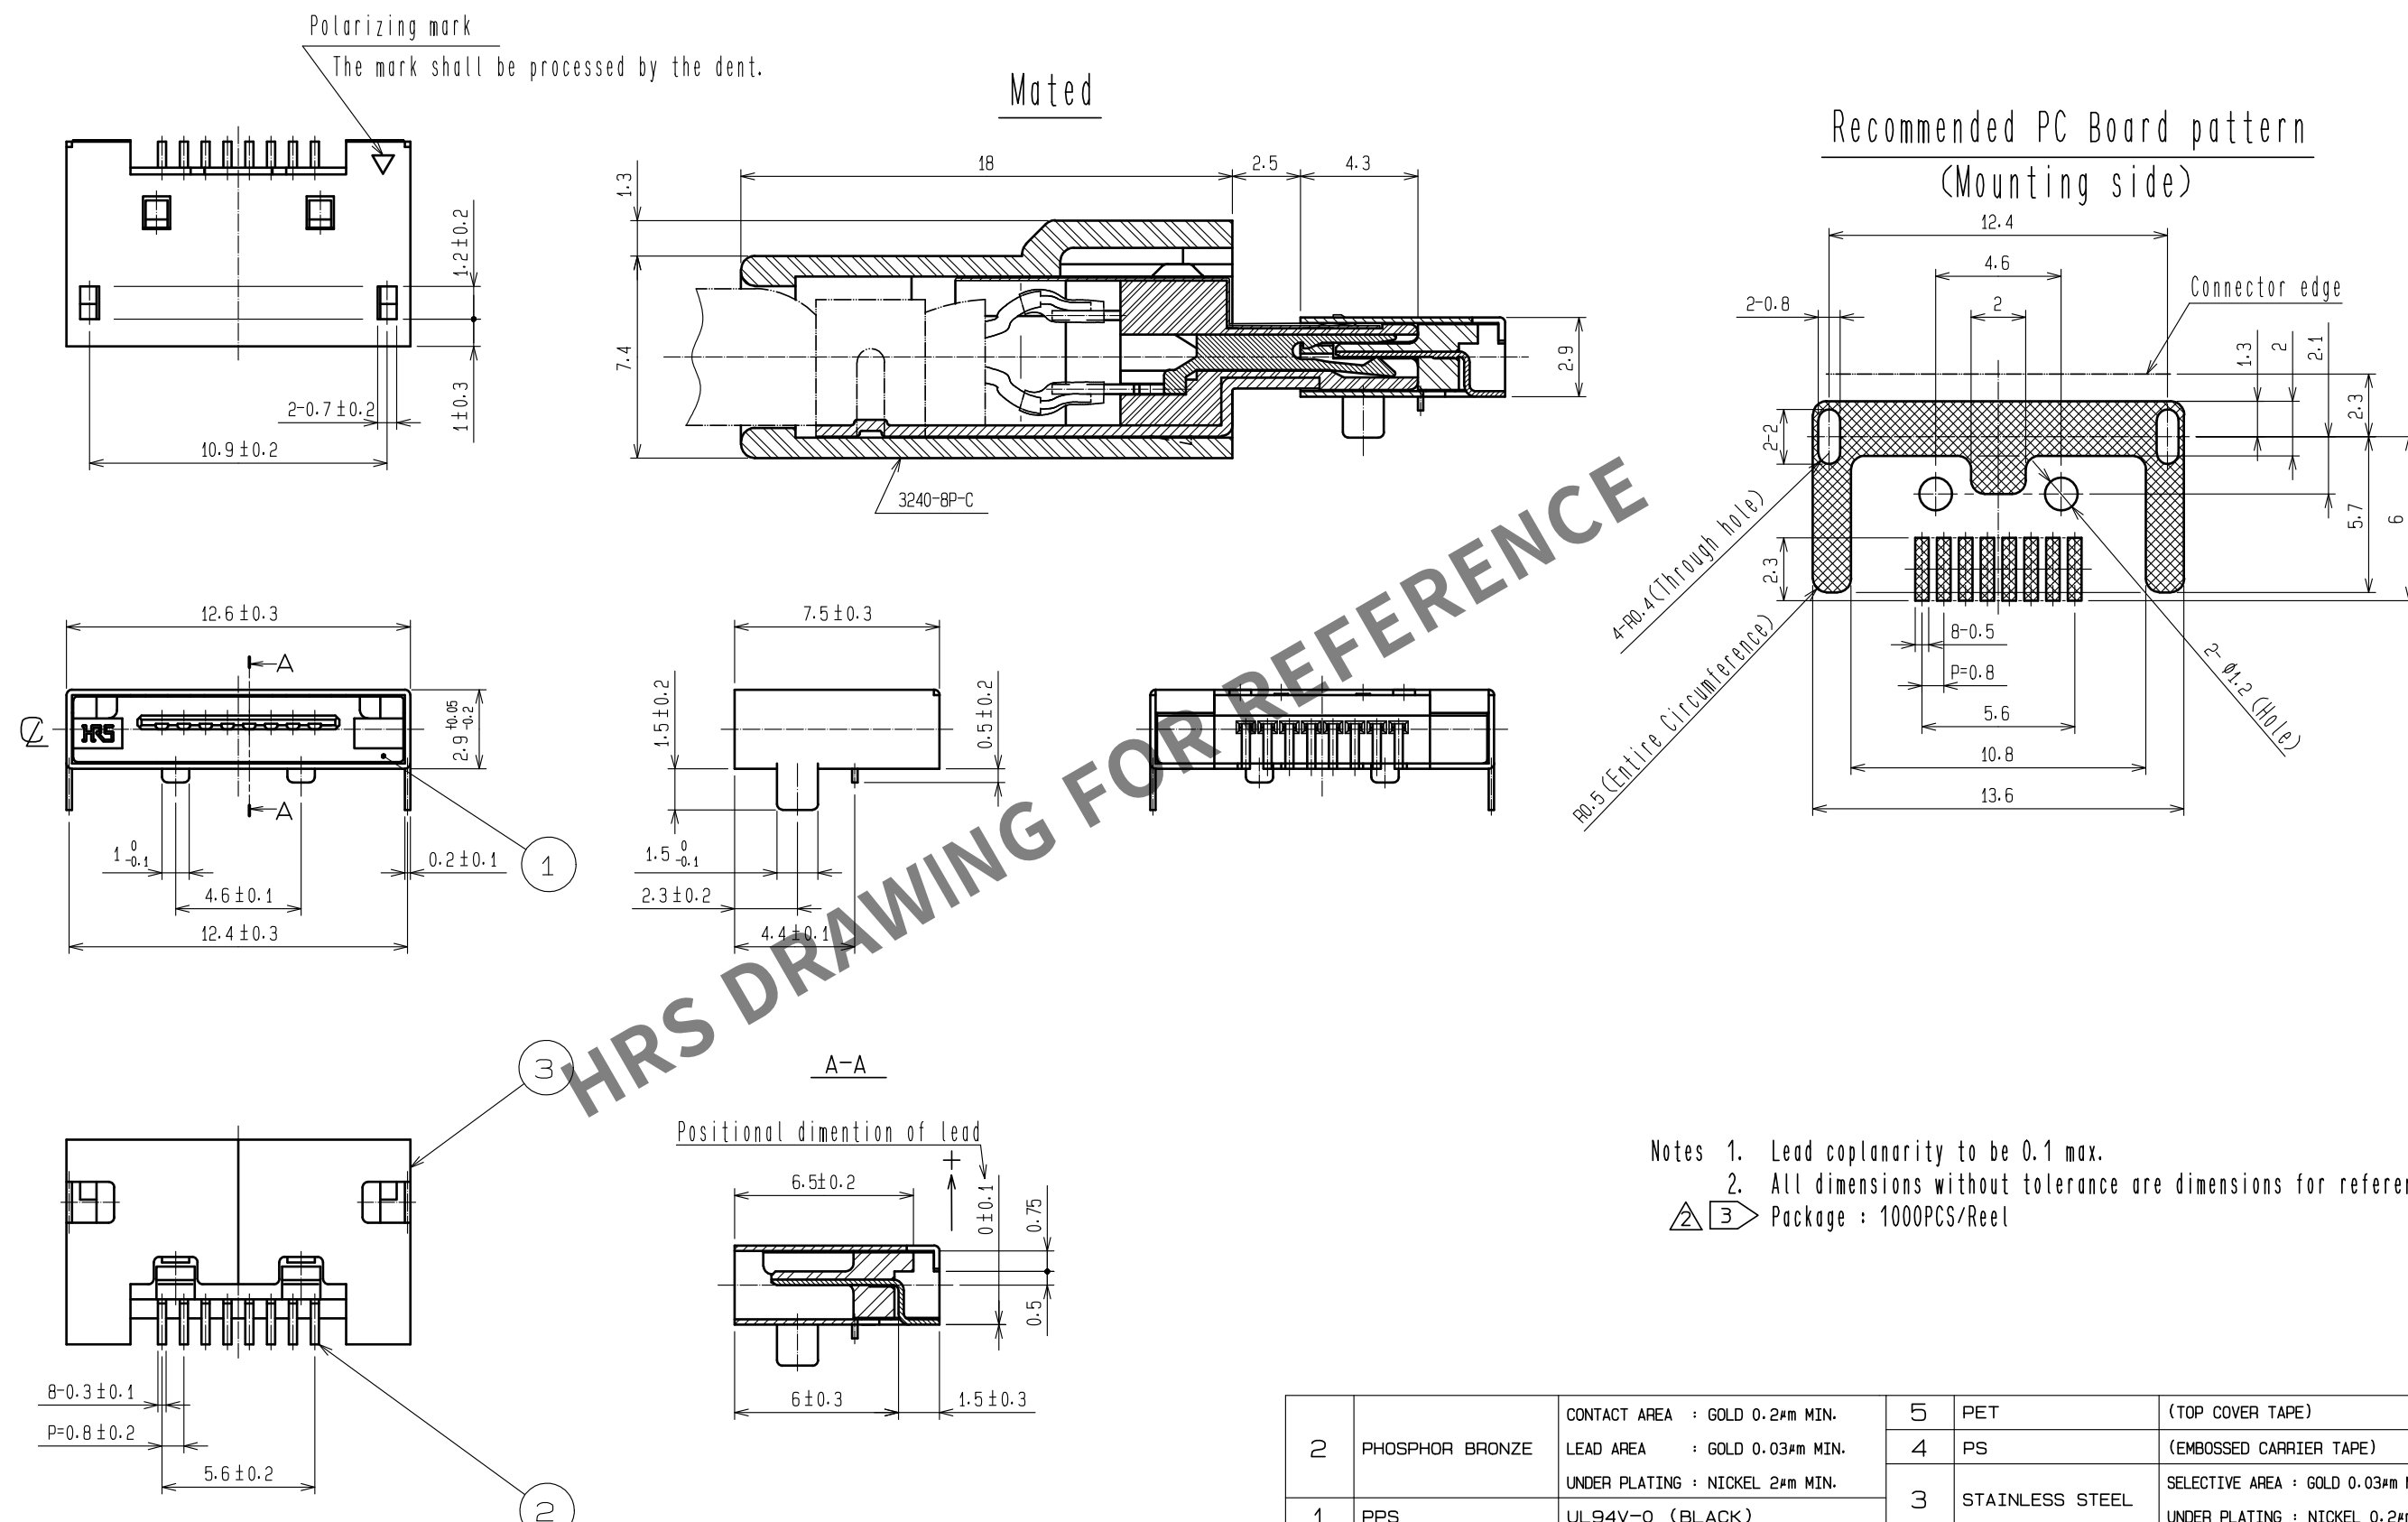

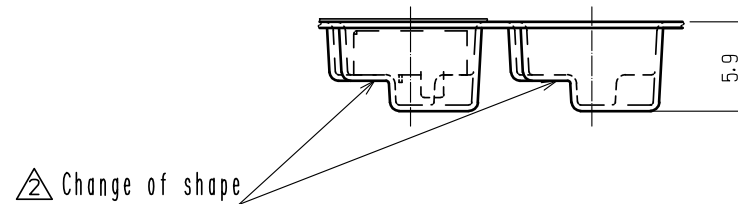
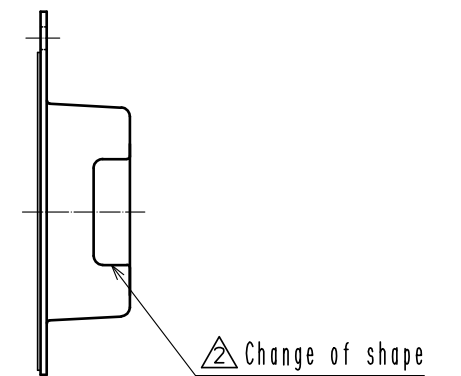
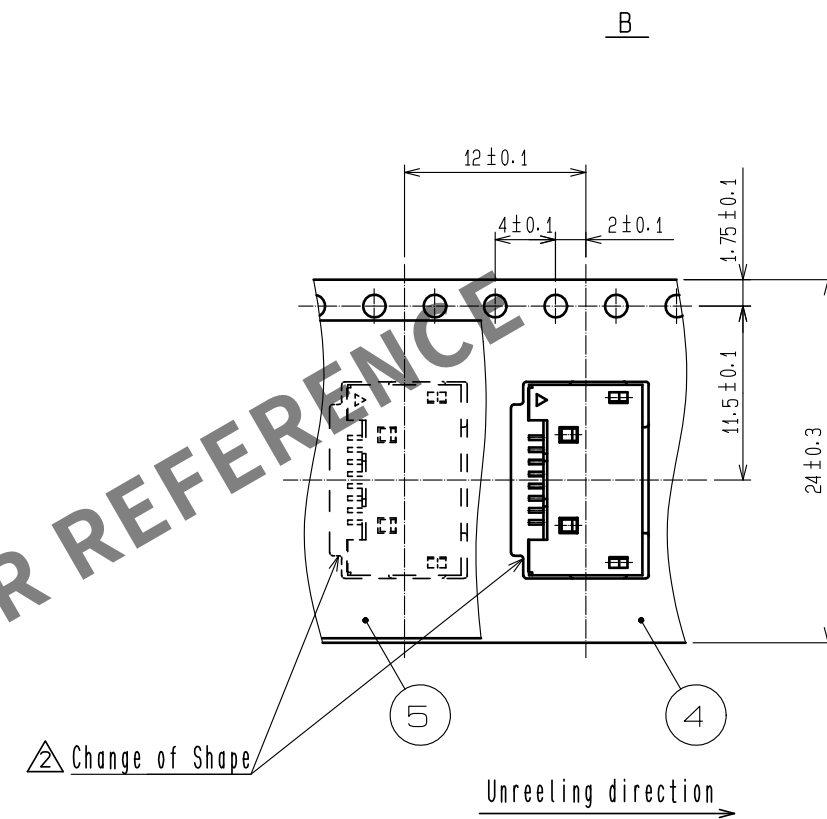


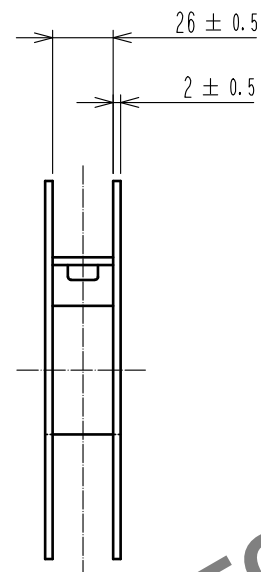

Notes 1. Lead coplanarity to be 0.1 max.
2. All dimensions without tolerance are dimensions for reference.
3 Package : 1000PCS/Reel

2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2#m MIN.		5	PET	(TOP COVER TAPE)					
		LEAD AREA : GOLD 0.03#m MIN.		4	PS	(EMBOSSD CARRIER TAPE)					
		UNDER PLATING : NICKEL 2#m MIN.		3	STAINLESS STEEL	SELECTIVE AREA : GOLD 0.03#m MIN.					
1	PPS	UL94V-0 (BLACK)				UNDER PLATING : NICKEL 0.2#m MIN.					
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS				
UNITS mm				SCALE 4 : 1		COUNT 7	DESCRIPTION OF REVISIONS DIS-E-00011412		DESIGNED KN. ICHIKAWA	CHECKED KG. OKITA	DATE 20221102
 HIROSE ELECTRIC CO., LTD.				APPROVED : AO. SUZUKI		20060510	DRAWING NO. EDC3-046586-03				
				CHECKED : NF. MIYAZAKI		20060510	PART NO. 3260-8S3(56)				
				DESIGNED : HN. ANDO		20060510	CODE NO. CL0232-0010-5-56				
				DRAWN : HN. ANDO		20060510	 1/2				

May.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

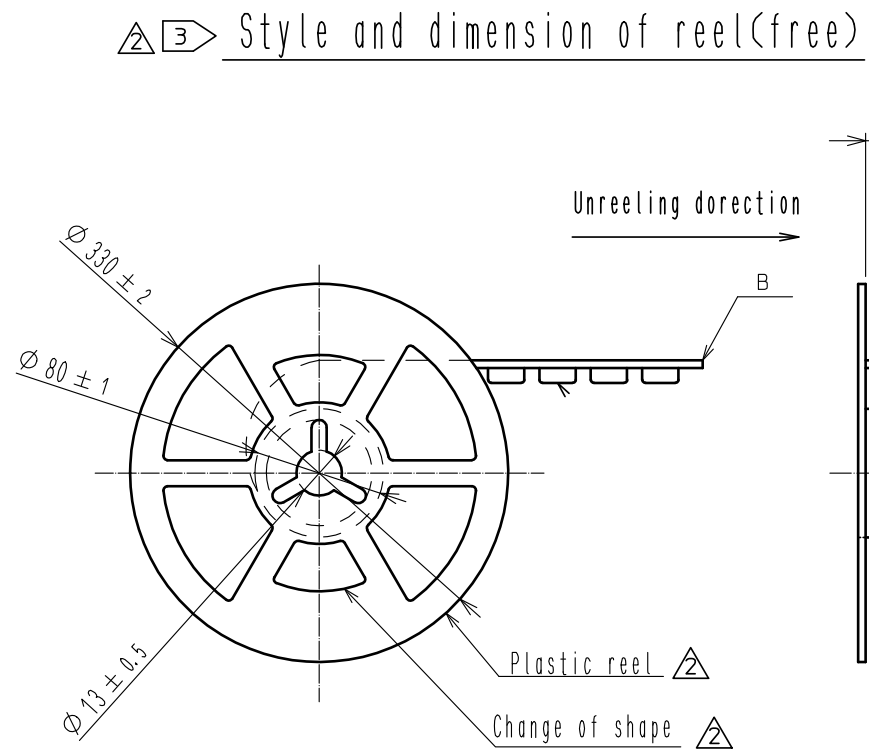

HRS

DRAWING NO.	EDC3-046586-03
PART NO.	3260-8S3(56)
CODE NO.	CL0232-0010-5-56

△ 2/2