
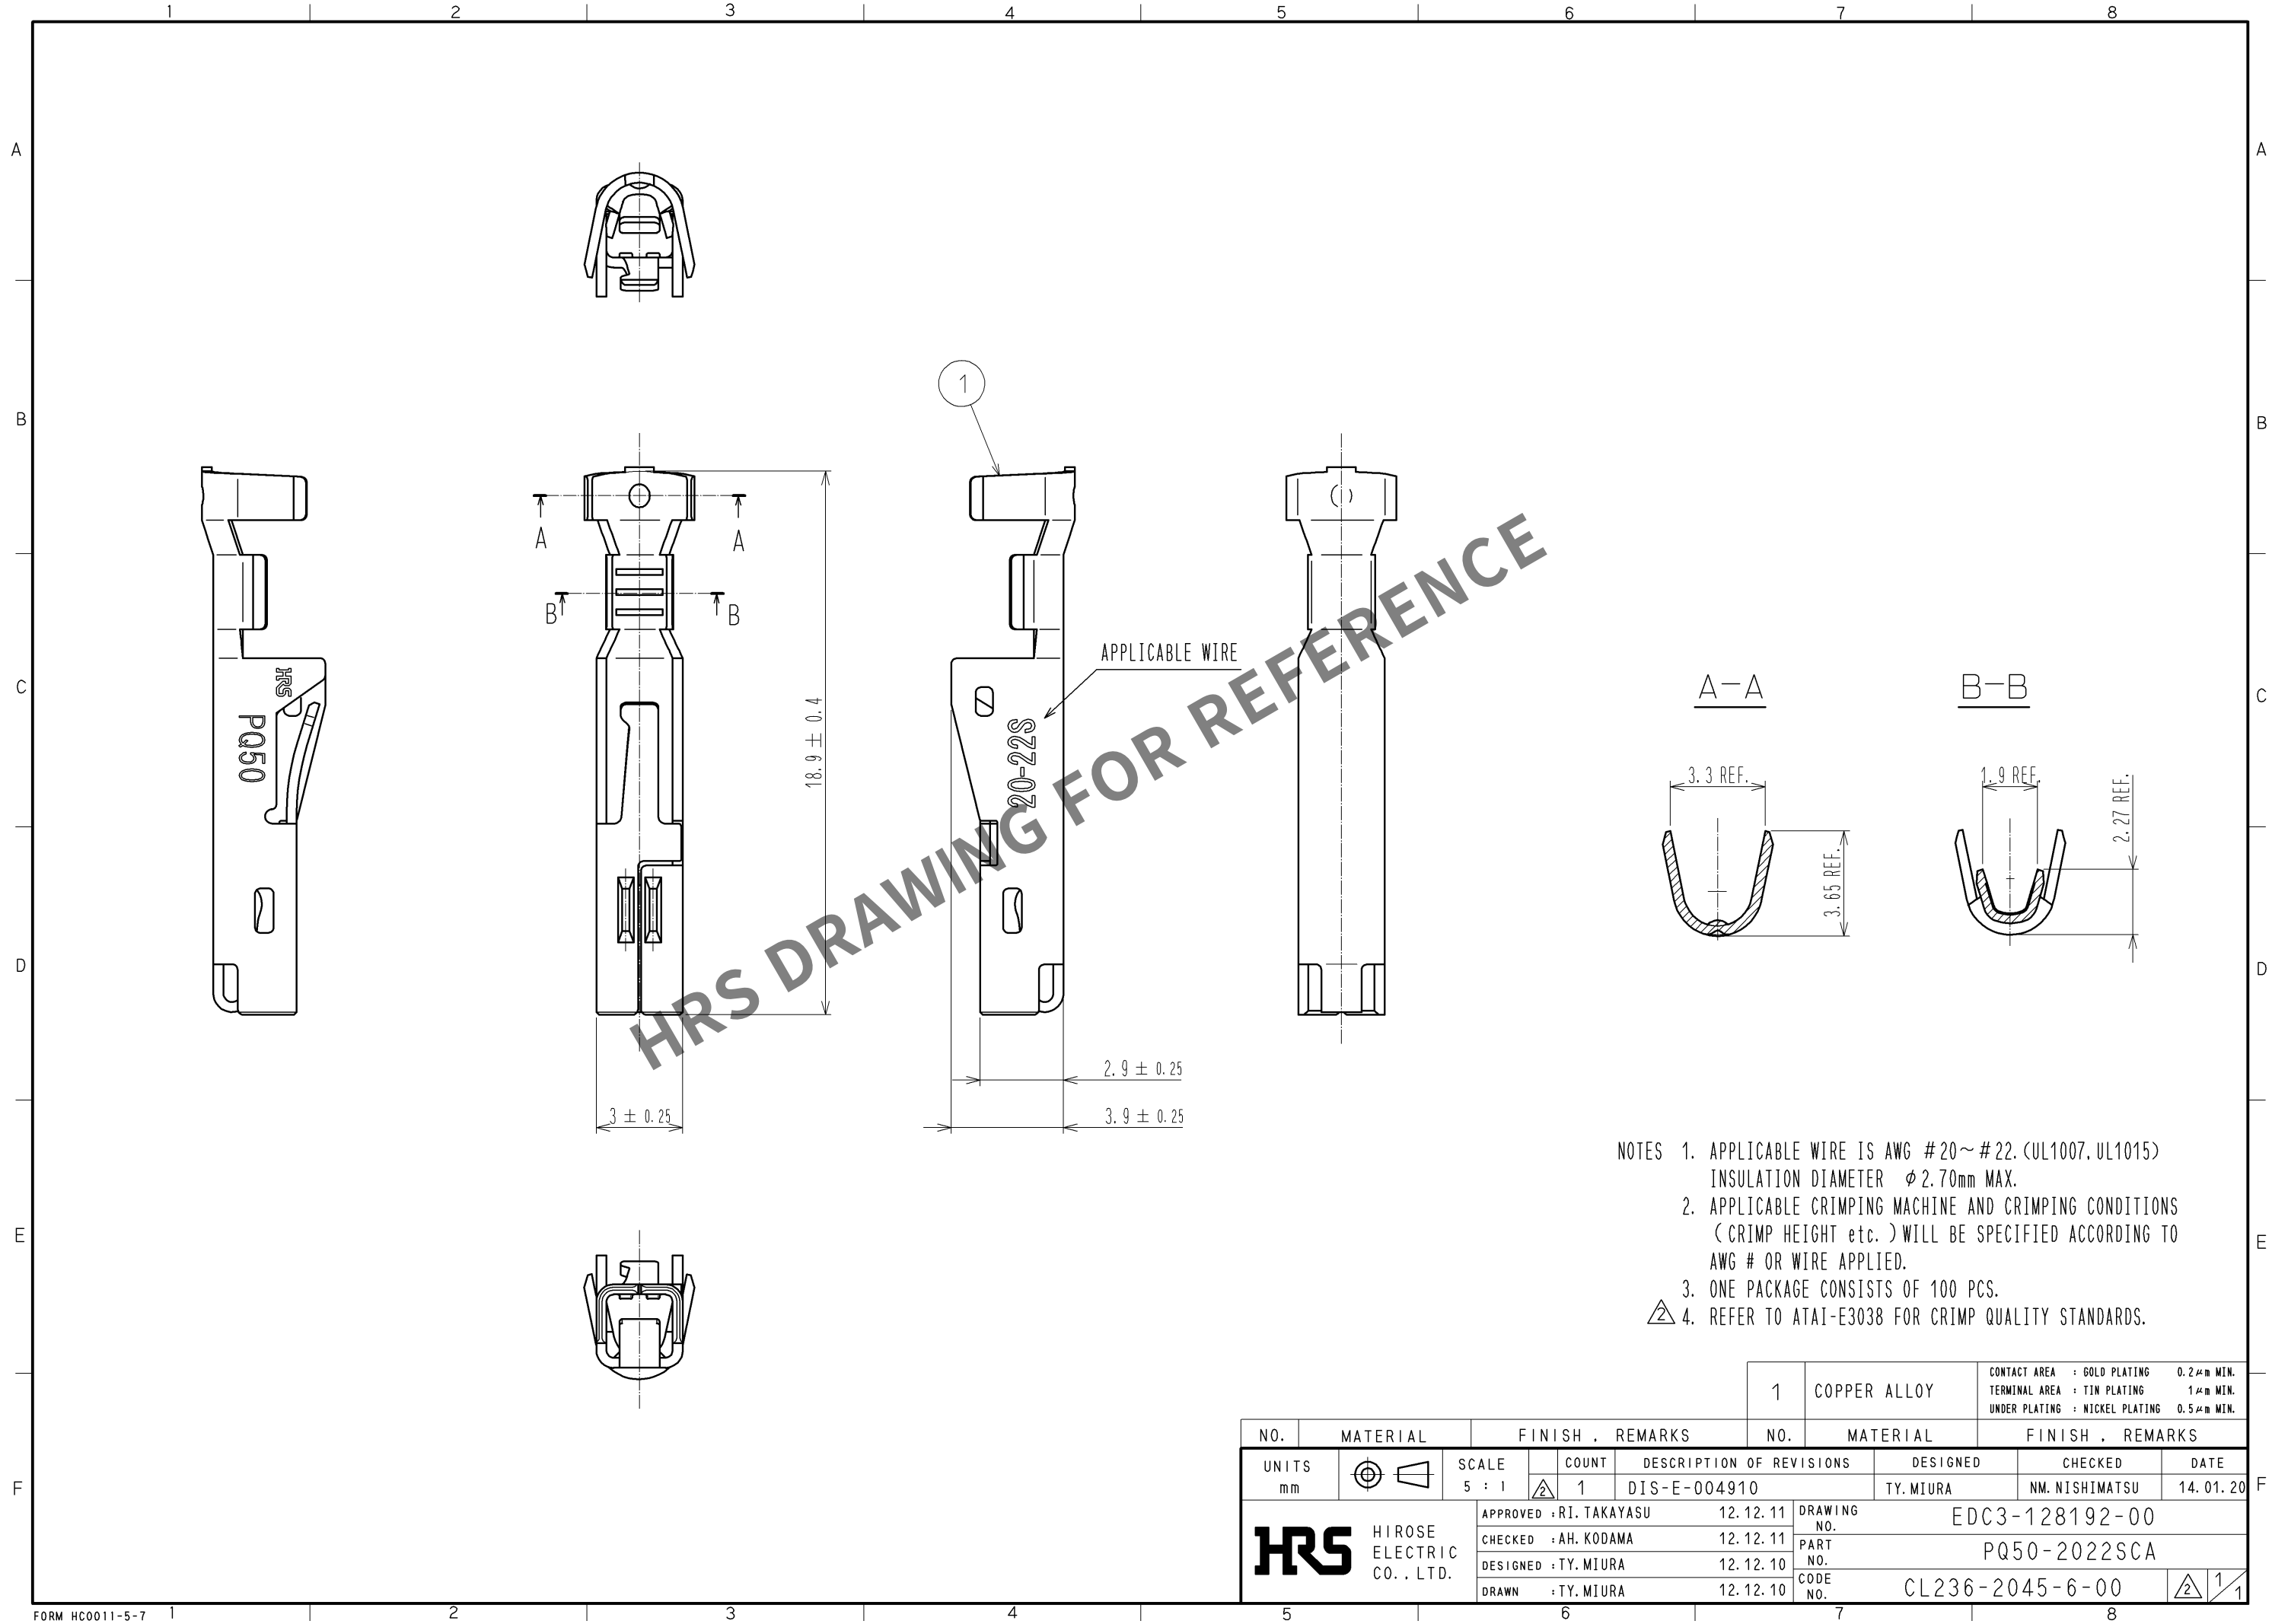


Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTES 1. APPLICABLE WIRE IS AWG #20~#22. (UL1007, UL1015)
INSULATION DIAMETER ϕ 2.70mm MAX.
2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS
(CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO
AWG # OR WIRE APPLIED.
3. ONE PACKAGE CONSISTS OF 100 PCS.
4. REFER TO ATAI-E3038 FOR CRIMP QUALITY STANDARDS.

				1		COPPER ALLOY		CONTACT AREA : GOLD PLATING 0.2μm MIN. TERMINAL AREA : TIN PLATING 1μm MIN. UNDER PLATING : NICKEL PLATING 0.5μm MIN.		
NO.	MATERIAL		FINISH , REMARKS			NO.	MATERIAL		FINISH , REMARKS	
UNITS mm			SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-E-004910		DESIGNED TY. MIURA	CHECKED NM. NISHIMATSU	DATE 14. 01. 20
 HIROSE ELECTRIC CO., LTD.			APPROVED : RI. TAKAYASU		12. 12. 11		DRAWING NO. EDC3-128192-00			
			CHECKED : AH. KODAMA		12. 12. 11		PART NO. PQ50-2022SCA			
			DESIGNED : TY. MIURA		12. 12. 10		CODE NO. CL236-2045-6-00			
			DRAWN : TY. MIURA		12. 12. 10		 1/1			