

Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


HRS DRAWING FOR REFERENCE




△2 △3 Style and dimension of box

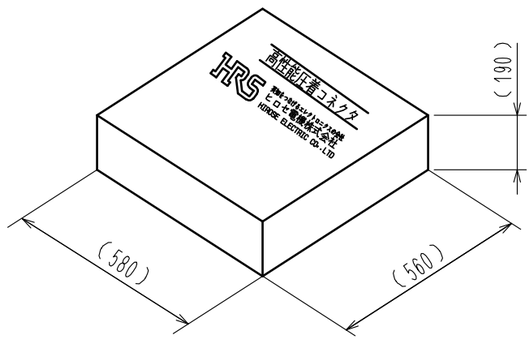



△2 △3 Style and dimension of reel

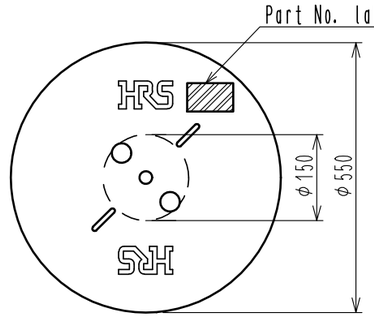


Detail of part No. label

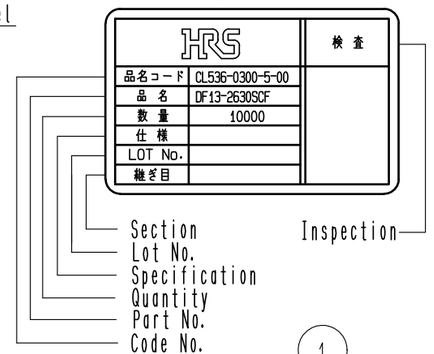

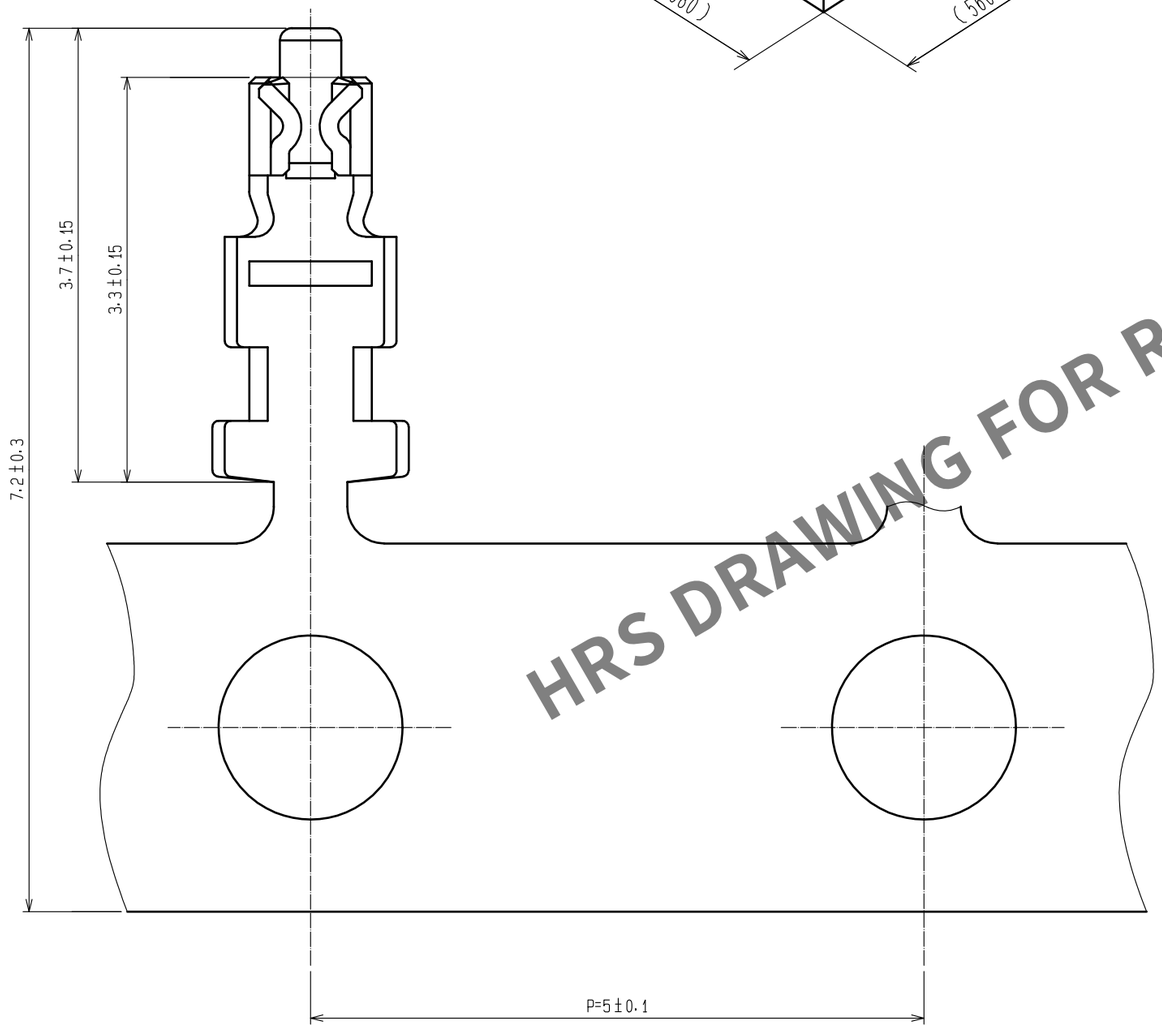

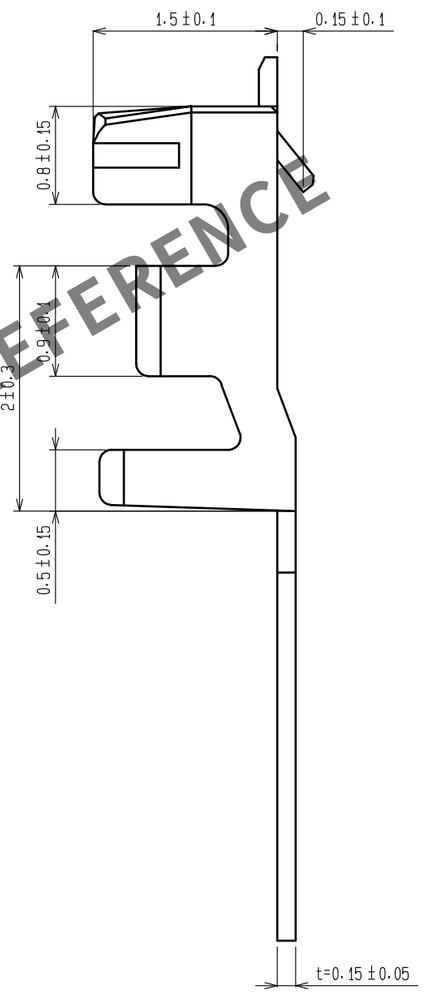

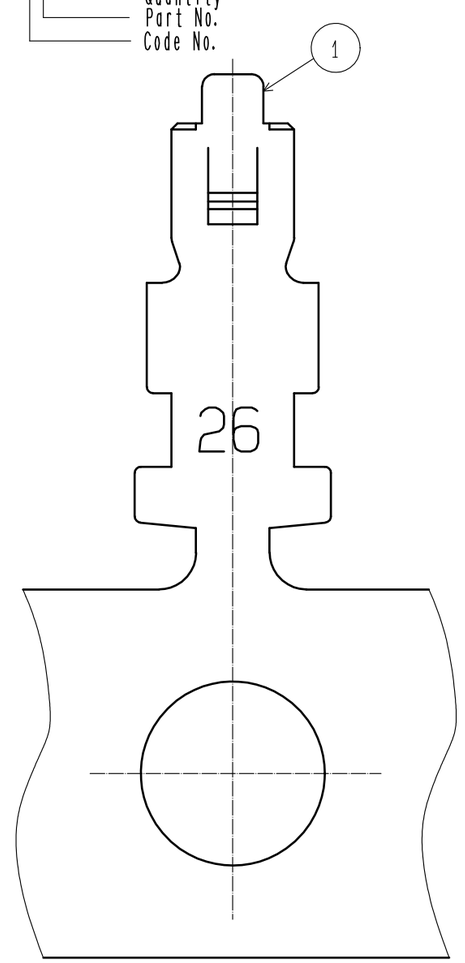

△2Note 1. Applicable wire : 26 to 30 AWG
Outer diameter :φ0.56 to 1.0mm
2. 1 reel:10000 contacts.
△2 △3 Style of reel and box are shown in figure.
△2 4. A maximum of 5 reels are packed up in one box.
△2 5. Please be sure to check the form of crimping using a cable when you adjust applicator.
△2 6. Refer to the technical specification(ATAP-H0373-00)for the packing type.
△2 7. Refer to the crimping quality standard(ETAD-H0953-00)for the packing type.

NO.	MATERIAL	FINISH . REMARKS
1	Phosphor bronze	Tin plating 1μm min

UNITS	SCALE	△の数	訂正記事	設計	検図	年月日
mm	20:1	△2 8	DIS-H-00004839	HT. SATO	SZ. ONO	20190513

HIROSE ELECTRIC CO., LTD.

承認	KJ. KATAYOSE	20050105	図番: EDC-081857-00-00
検図	TY. OMA	20050105	製品名: DF13-2630SCF
設計	TS. KUMAZAWA	20050105	製品コード: CL536-0300-5-00 △2 1/1
製図	TS. KUMAZAWA	20050105	