


May.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

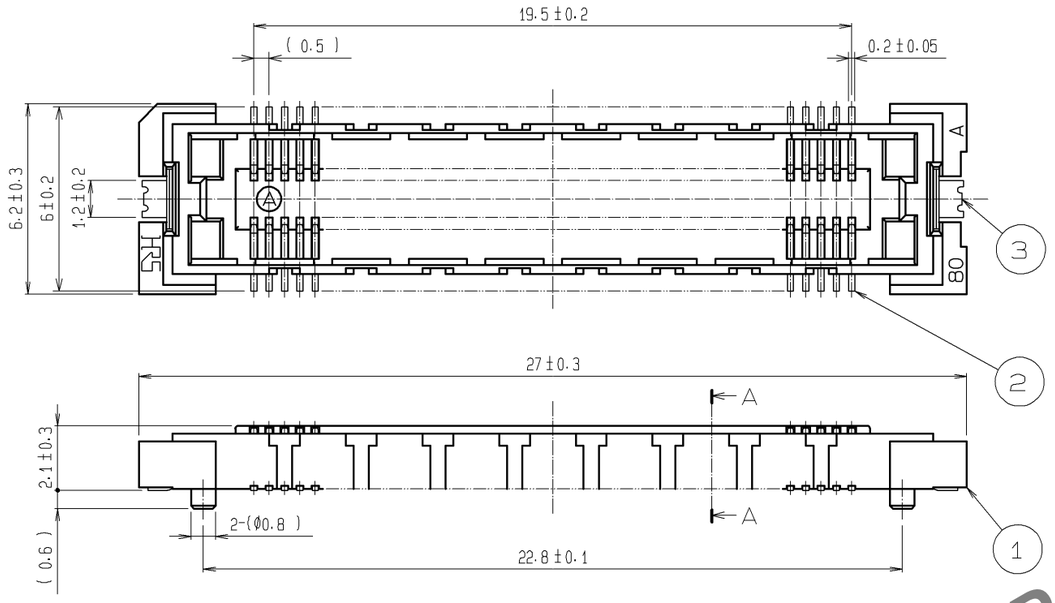




A−A(10:1)

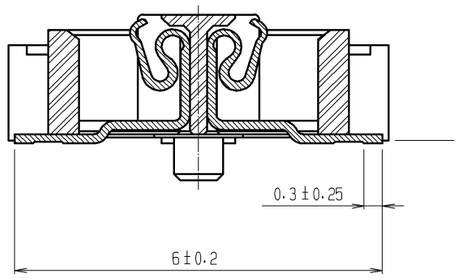

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

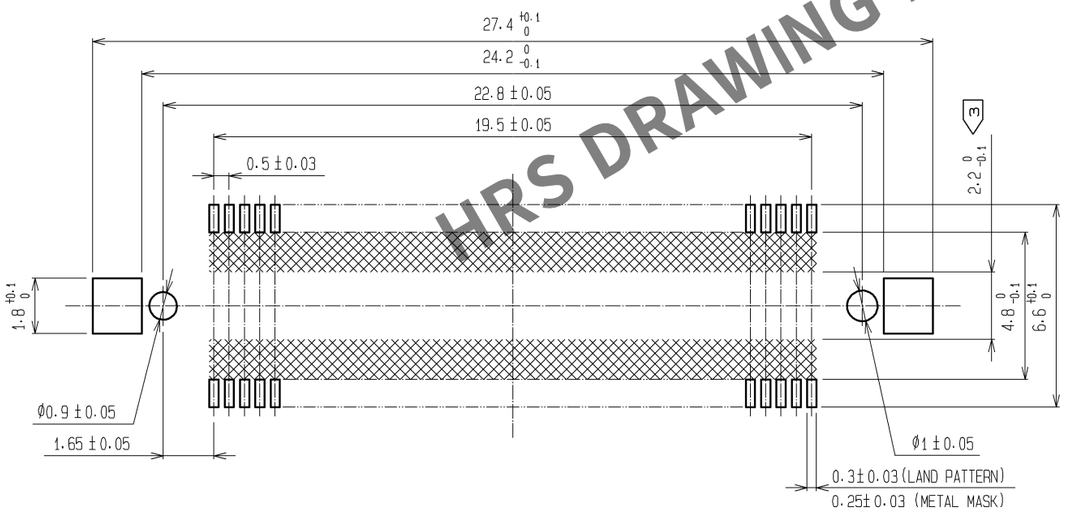

HRS DRAWING FOR REFERENCE

NOTES
1. SMT LEAD-COPLANARITY:0.1 MAX.
2. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
4. TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
3	PHOSPHOR BRONZE	TIN PLATING			
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : GOLD 0.05μm min. UNDER PLATING : NICKEL 1μm min.	6	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
			5	PET	TOP COVER TAPE
1	LCP	BEIGE UL94V-0	4	PS	EMBOSSED CARRIER TAPE


UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△					

HIROSE ELECTRIC CO., LTD.

APPROVED	HS. OKAWA	11. 01. 26	DRAWING NO.	EDC3-152440-02
CHECED	HT. YAMAGUCHI	11. 01. 26	PART NO.	FX11A-80S-SV(22)
DESIGNED	SY. KAMIGA	11. 01. 26	CODE NO.	CL573-0748-0-22 △ 1/2
DRAWN	HK. SUNADORI	11. 01. 26		


May.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

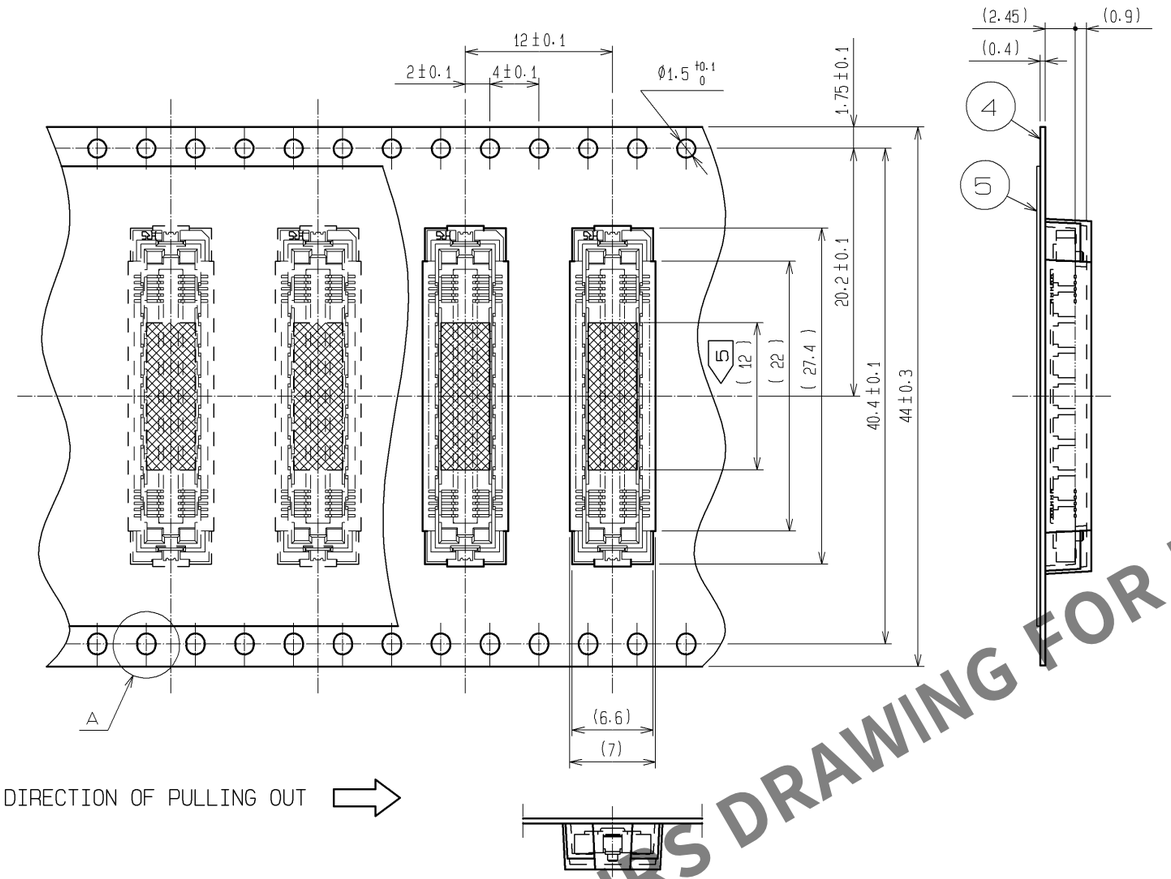


THE DIRECTION OF PULLING OUT ⇨

REELED DIMENSION(Free)

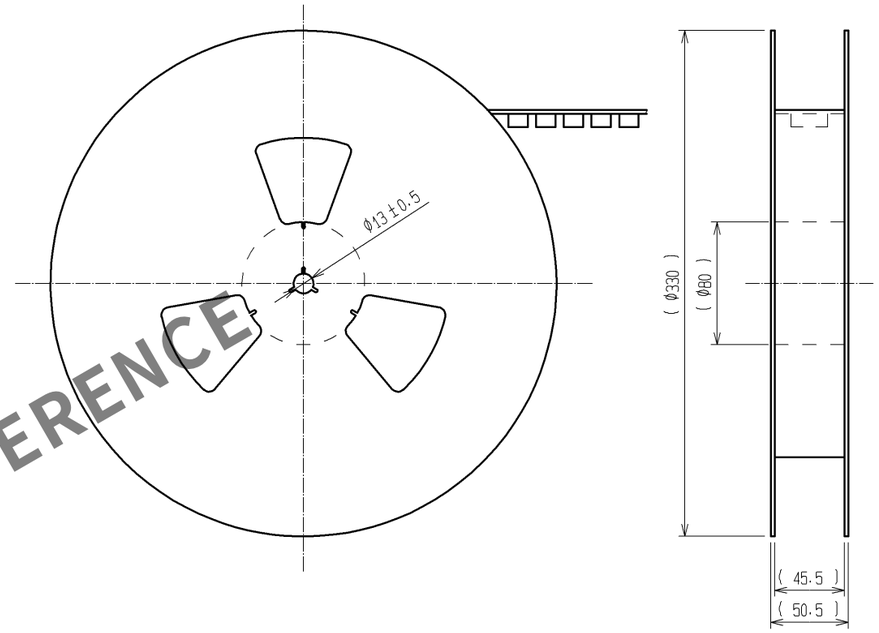


HRS DRAWING FOR REFERENCE

A(5:1)



DETAIL FOR VACUUM PICKUP (5:1)



NOTES
1. 1REEL:1000 CONNECTORS.
2. MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
3. THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5. REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

DRAWING NO.	EDC3-152440-02
PART NO.	FX11A-80S-SV(22)
CODE NO.	CL573-0748-0-22

△ 2/2