



Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

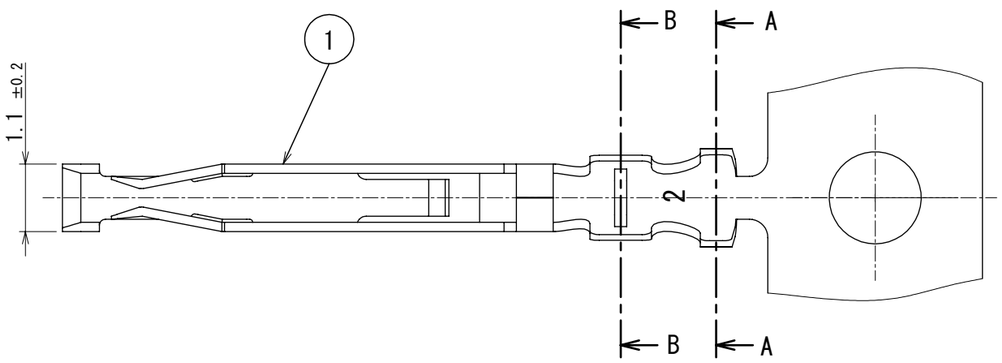


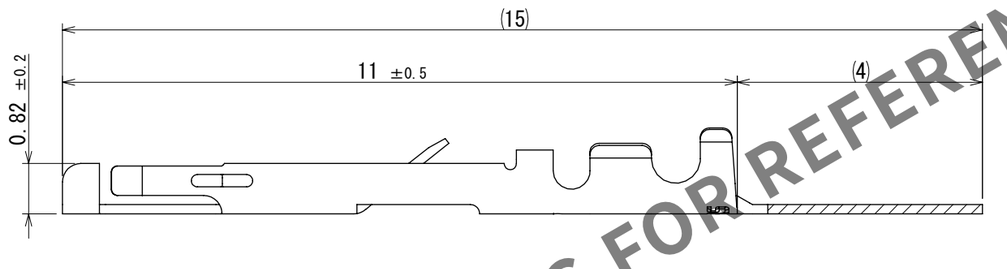







B-B
(20 : 1)




A-A
(20 : 1)



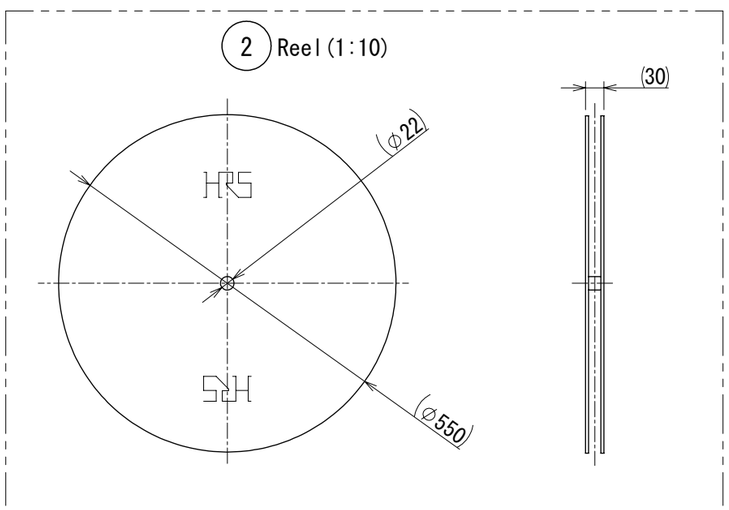

3 Fig.1 Recommended cable preparation dimensions



Notes 1 This product is apply to the wire 26 to 30 AWG(wire jacket diameter φ1 max).
2 Per reel:10000 contacts
3 Recomended cable preparation dimensions are shown in Fig.1.

△1 CAD change

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
1	Phosphor bronze	Selective gold plating	2	Carton	(Terminal winding reel)

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	10:1	△1	1	DIS-C-00018361	KN. IKEHARA	TP. KOMATSU	2024.10.16

HIROSE ELECTRIC CO., LTD.

APPROVED	MR. YOSHIDA	2005.01.05
CHECKED	MO. SATOH	2005.01.05
DESIGNED	YH. YAMADA	2005.01.05
DRAWN	YH. YAMADA	2005.01.05

DRAWING NO.	EDC-112453-00-00
PART NO.	HR30-SC-211
CODE NO.	CL0130-0017-3-00

△1 1/1