


Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


HRS DRAWING FOR REFERENCE

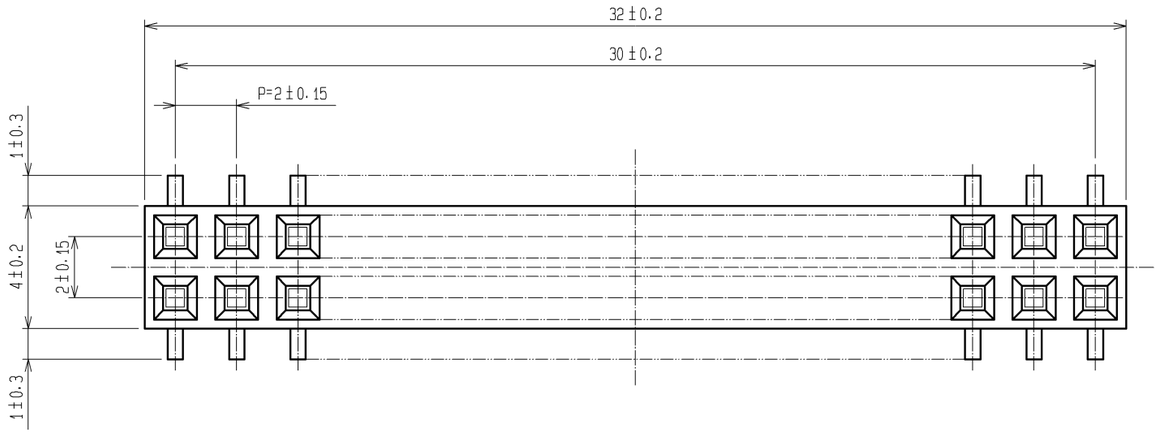


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)(FREE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

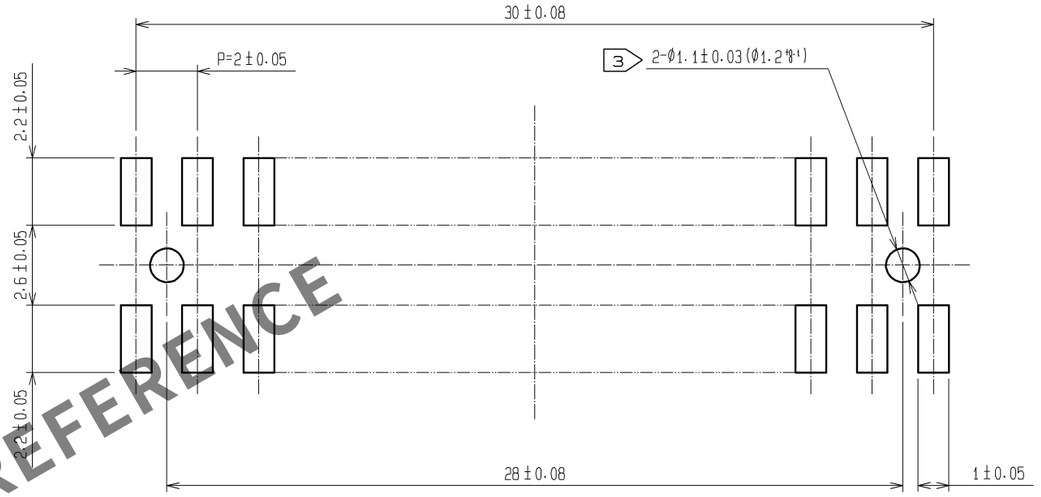

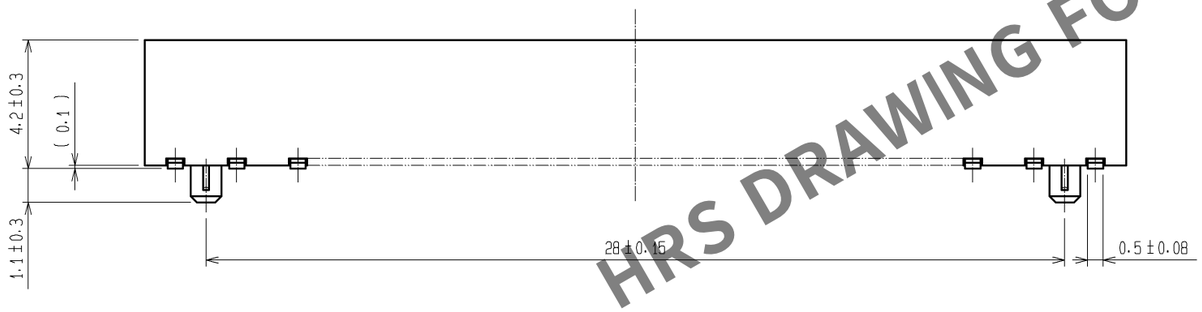

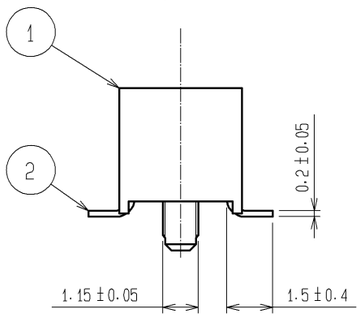

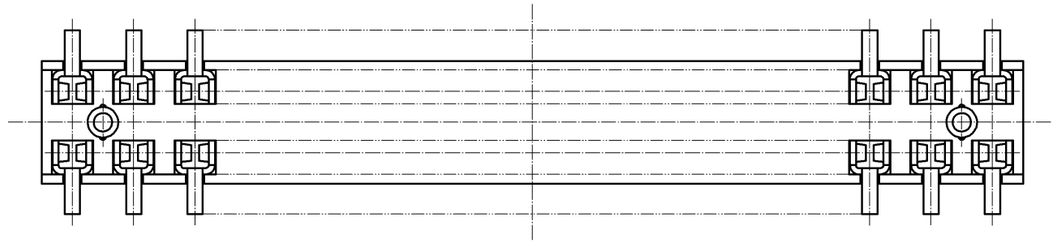

NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERNCE.
3 FOR AUTOMATED MOUNTING, RECOMMENDED THROUH HOLE DIAMETER OF BOSS IS $1.2^{+0.1}_{0}$.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
1	PPS	LIGHT BROWN / UL94 V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min. LEAD AREA:TIN-PLATING 1μm min. UNDER PLATING:NICKEL 1μm min.

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

HRS HIROSE ELECTRIC CO., LTD.

APPROVED	HS. OKAWA	09. 04. 10
CHECKED	HT. YAMAGUCHI	09. 04. 10
DESIGNED	SY. KAMIGA	09. 04. 08
DRAWN	HK. SUNADORI	09. 04. 08

DRAWING NO.	EDC3-082683-21
PART NO.	A3A-32DA-2SV(71)
CODE NO.	CL621-1154-0-71

△ 1/1