




Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

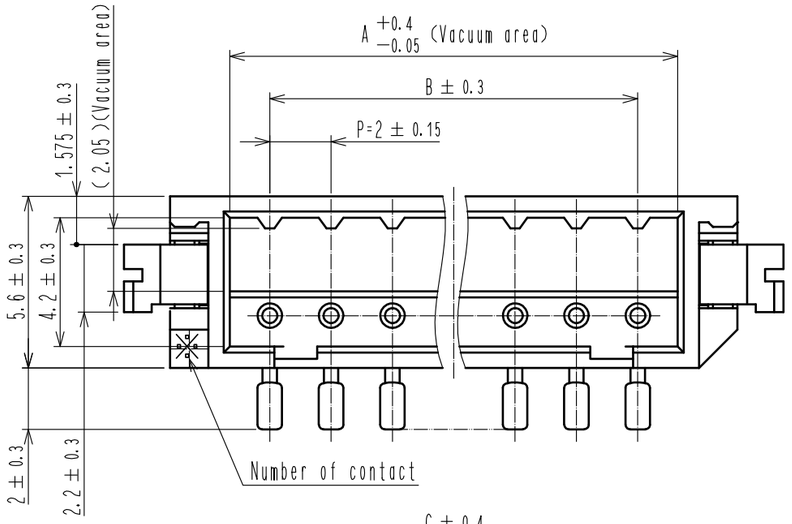


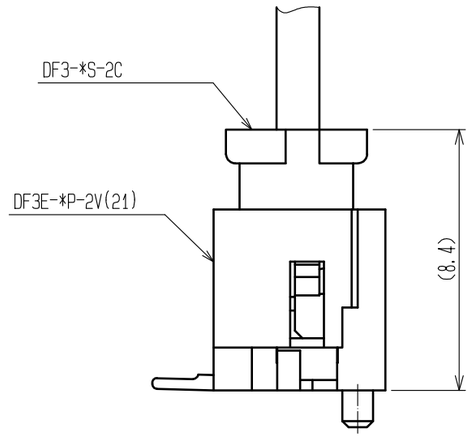

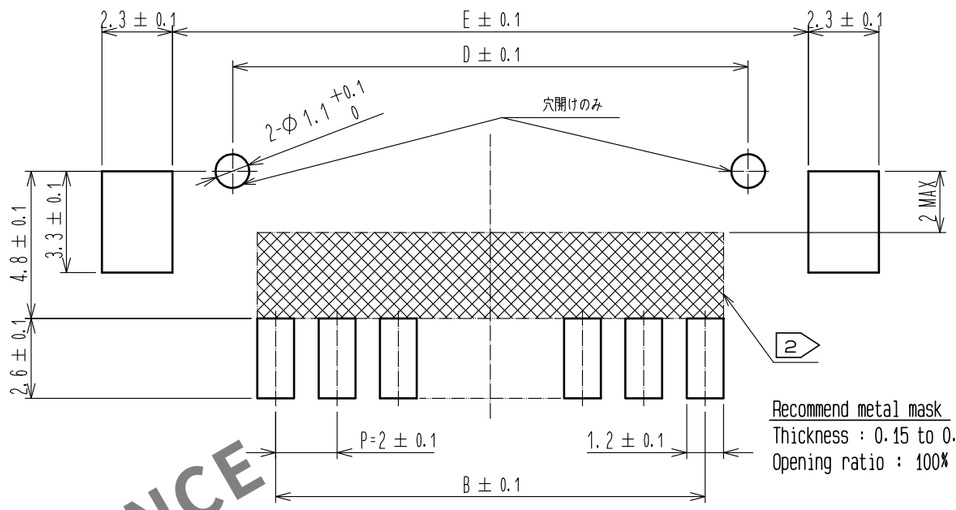

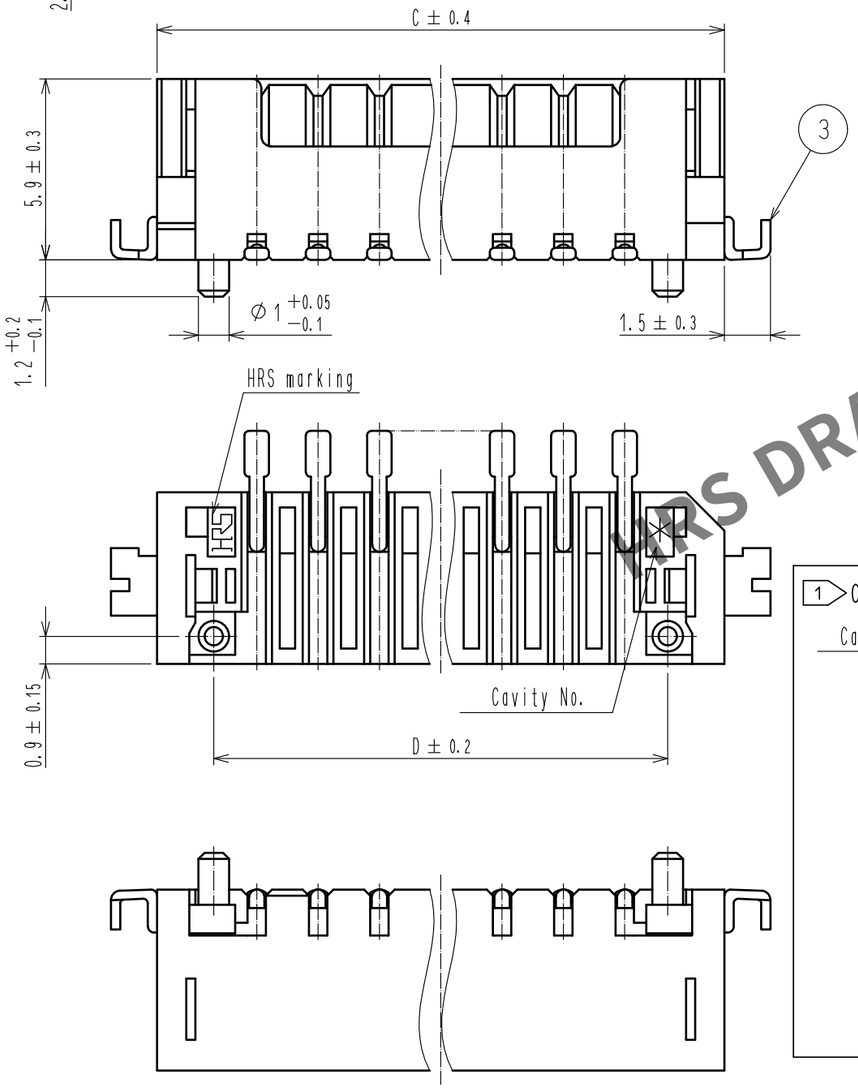

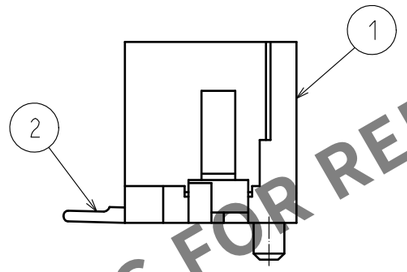

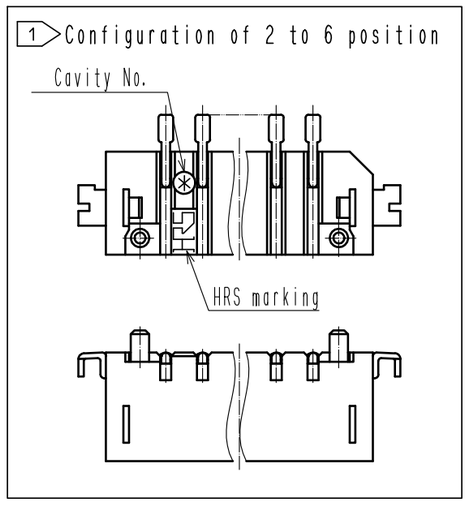

HRS DRAWING FOR REFERENCE

製品名	製品番号	A	B	C	D	E
DF3E- 2P-2V(21)	CL543-0357-0-21	4.6	2.0	8.5	4.8	8.74
DF3E- 3P-2V(21)	CL543-0358-0-21	6.6	4.0	10.5	6.8	10.74
DF3E- 4P-2V(21)	CL543-0359-0-21	8.6	6.0	12.5	8.8	12.74
DF3E- 5P-2V(21)	CL543-0360-0-21	10.6	8.0	14.5	10.8	14.74
DF3E- 6P-2V(21)	CL543-0361-0-21	12.6	10.0	16.5	12.8	16.74
DF3E- 7P-2V(21)	—	14.6	12.0	18.5	14.8	18.74
DF3E- 8P-2V(21)	CL543-0363-0-21	16.6	14.0	20.5	16.8	20.74
DF3E- 9P-2V(21)	—	18.6	16.0	22.5	18.8	22.74
2 DF3E-10P-2V(21)	—	20.6	18.0	24.5	20.8	24.74
2 DF3E-11P-2V(21)	—	22.6	20.0	26.5	22.8	26.74
DF3E-12P-2V(21)	—	24.6	22.0	28.5	24.8	28.74
DF3E-13P-2V(21)	—	26.6	24.0	30.5	26.8	30.74
DF3E-14P-2V(21)	—	28.6	26.0	32.5	28.8	32.74
DF3E-15P-2V(21)	—	30.6	28.0	34.5	30.8	34.74

Notes 1 It shows configuration of 2 to 6 position.
2 If there is pattern on ▨ part, there is a possibility that is will make contact with the leads.
3. Lead co-planarity include reinforced metal fittings shall be 0.1mm MAX.

NO.	MATERIAL	FINISH , REMARKS
2	Brass	Surface:Tin plated 1μm MIN Under plating:Copper plated 0.5μm MIN
1	Polyamide	Natural(Beige), UL94V-0
5	Polyester	Clear(Cover tape)
4	PS	Clear(Embossed carrier tape)
3	Brass	Surface:Tin plated 1μm MIN (Under plating)Nickel plated 1μm MIN

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	2	6	DIS-H-00026401	SS. YAMASAKI	SZ. ONO	20260421


HIROSE ELECTRIC CO., LTD.


APPROVED	KI. AKIYAMA	20160323
CHECKED	TS. FUKUSHIMA	20160322
DESIGNED	HT. SATO	20160318
DRAWN	HT. SATO	20160318

DRAWING NO.	EDC-367607-21-00
PART NO.	DF3E-*P-2V(21)
CODE NO.	CL543-

2 1/2

Jun.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

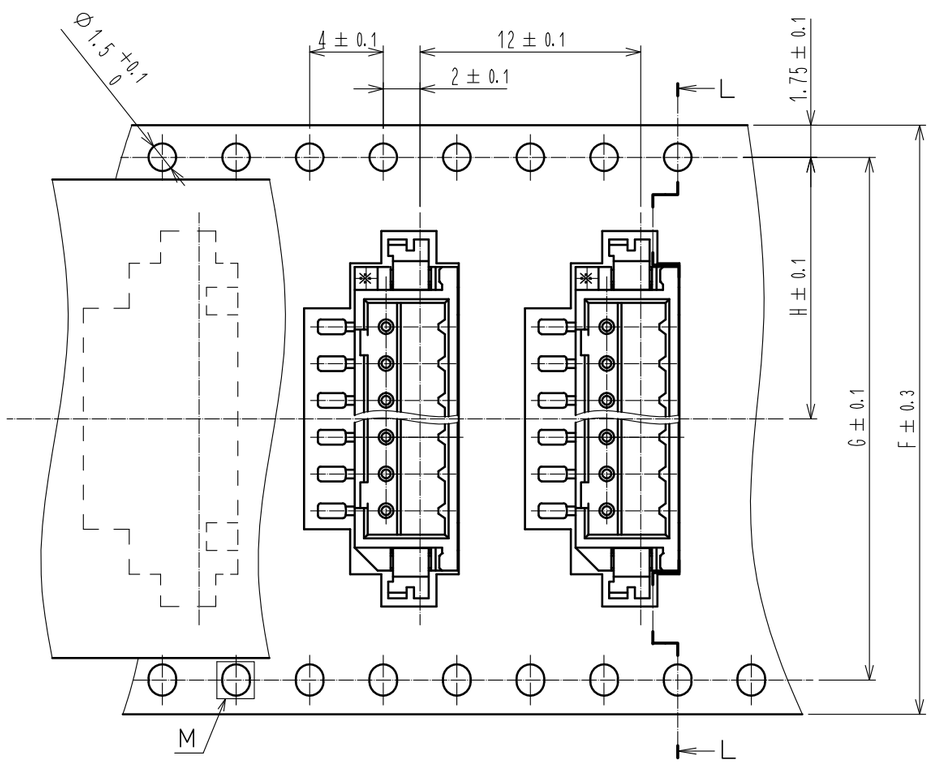

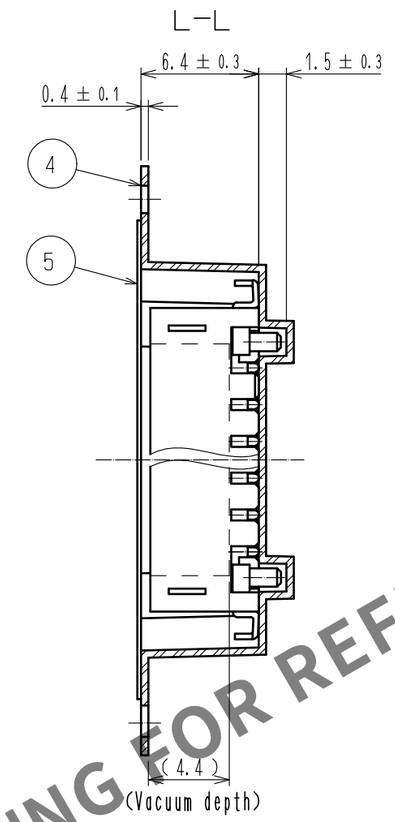


Part No.	Code No.	Number of contact	F	G	H	K
DF3E- 2P-2V(21)	CL543-0357-0-21	2	24.0		11.5	24.4
DF3E- 3P-2V(21)	CL543-0358-0-21	3	24.0		11.5	24.4
DF3E- 4P-2V(21)	CL543-0359-0-21	4	24.0		11.5	24.4
DF3E- 5P-2V(21)	CL543-0360-0-21	5	32.0	28.4	14.2	32.4
DF3E- 6P-2V(21)	CL543-0361-0-21	6	32.0	28.4	14.2	32.4
DF3E- 7P-2V(21)	—	7	32.0	28.4	14.2	32.4
DF3E- 8P-2V(21)	CL543-0363-0-21	8	44.0	40.4	20.2	44.4
DF3E- 9P-2V(21)	—	9	44.0	40.4	20.2	44.4
DF3E-10P-2V(21)	—	10	44.0	40.4	20.2	44.4
DF3E-11P-2V(21)	—	11	56.0	52.4	26.2	56.4
DF3E-12P-2V(21)	—	12	56.0	52.4	26.2	56.4
DF3E-13P-2V(21)	—	13	56.0	52.4	26.2	56.4
DF3E-14P-2V(21)	—	14	56.0	52.4	26.2	56.4
DF3E-15P-2V(21)	—	15	56.0	52.4	26.2	56.4


HRS DRAWING FOR REFERENCE

Direction of unreeling

M(10:1)



△2 Style and dimension of reel(FREE)

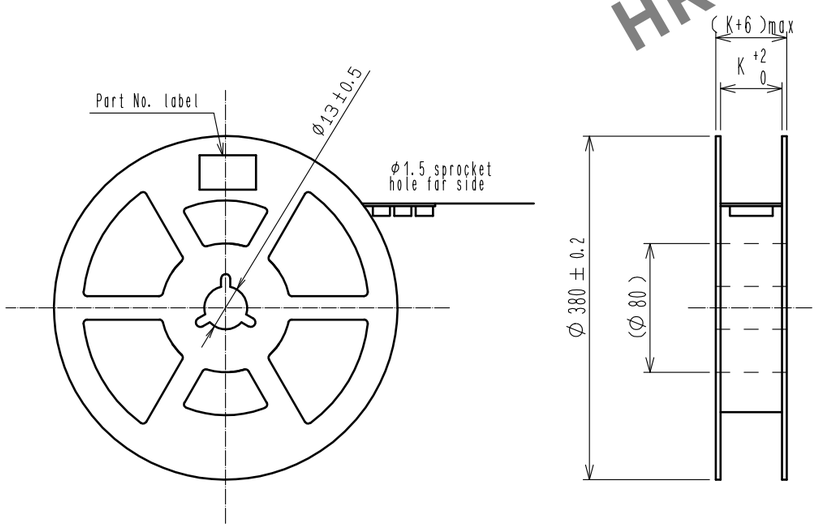

- Supplier
- Quantity
- Part No.
- Code No.
- Date of manufactured

Detail of Part No. label

生産月日	年　月　日
図番	CL543-****-*-21
品名	DF3E-*P-2V(21)
納入数量	1000ko
納入者	ヒロセ電機(株)

Notes
4. 1 reel 1000 connectors.
5. At the beginning of the reel, 30 boxes shall be empty.
   At The end of the reel, 20 boxes shall be empty.
6. When the tape width is 32, 44 and 56 mm, sprocket holes shall be set on both sides of reel as shown on this drawing.

HRS	DRAWING NO.	EDC-367607-21-00
	PART NO.	DF3E-*P-2V(21)
	CODE NO.	CL543- △2 2/2