
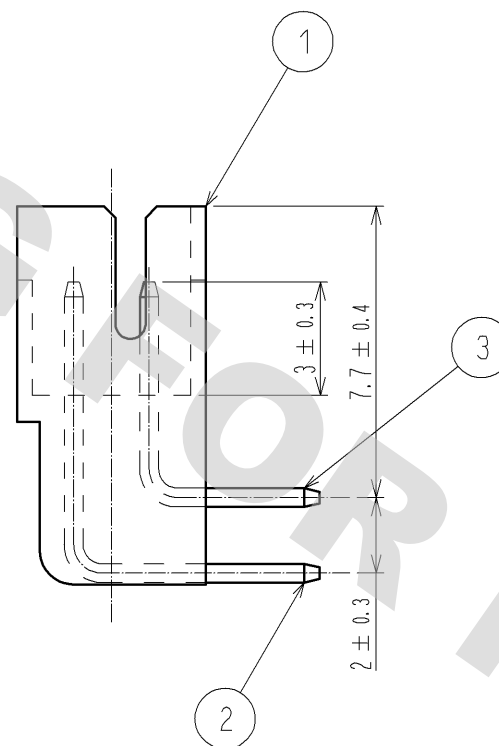
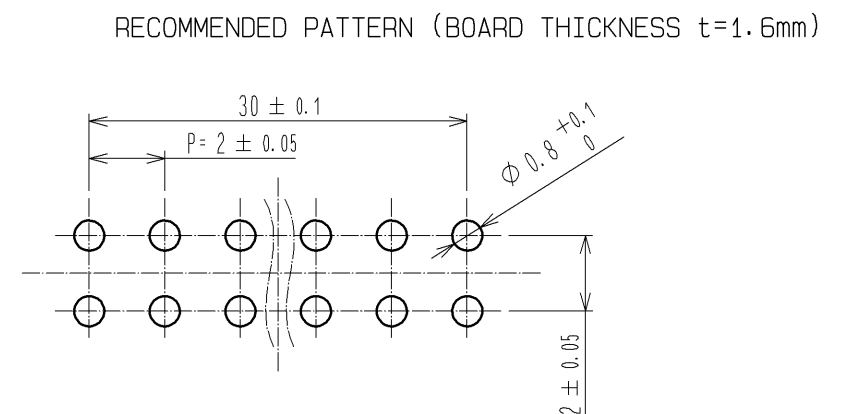


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

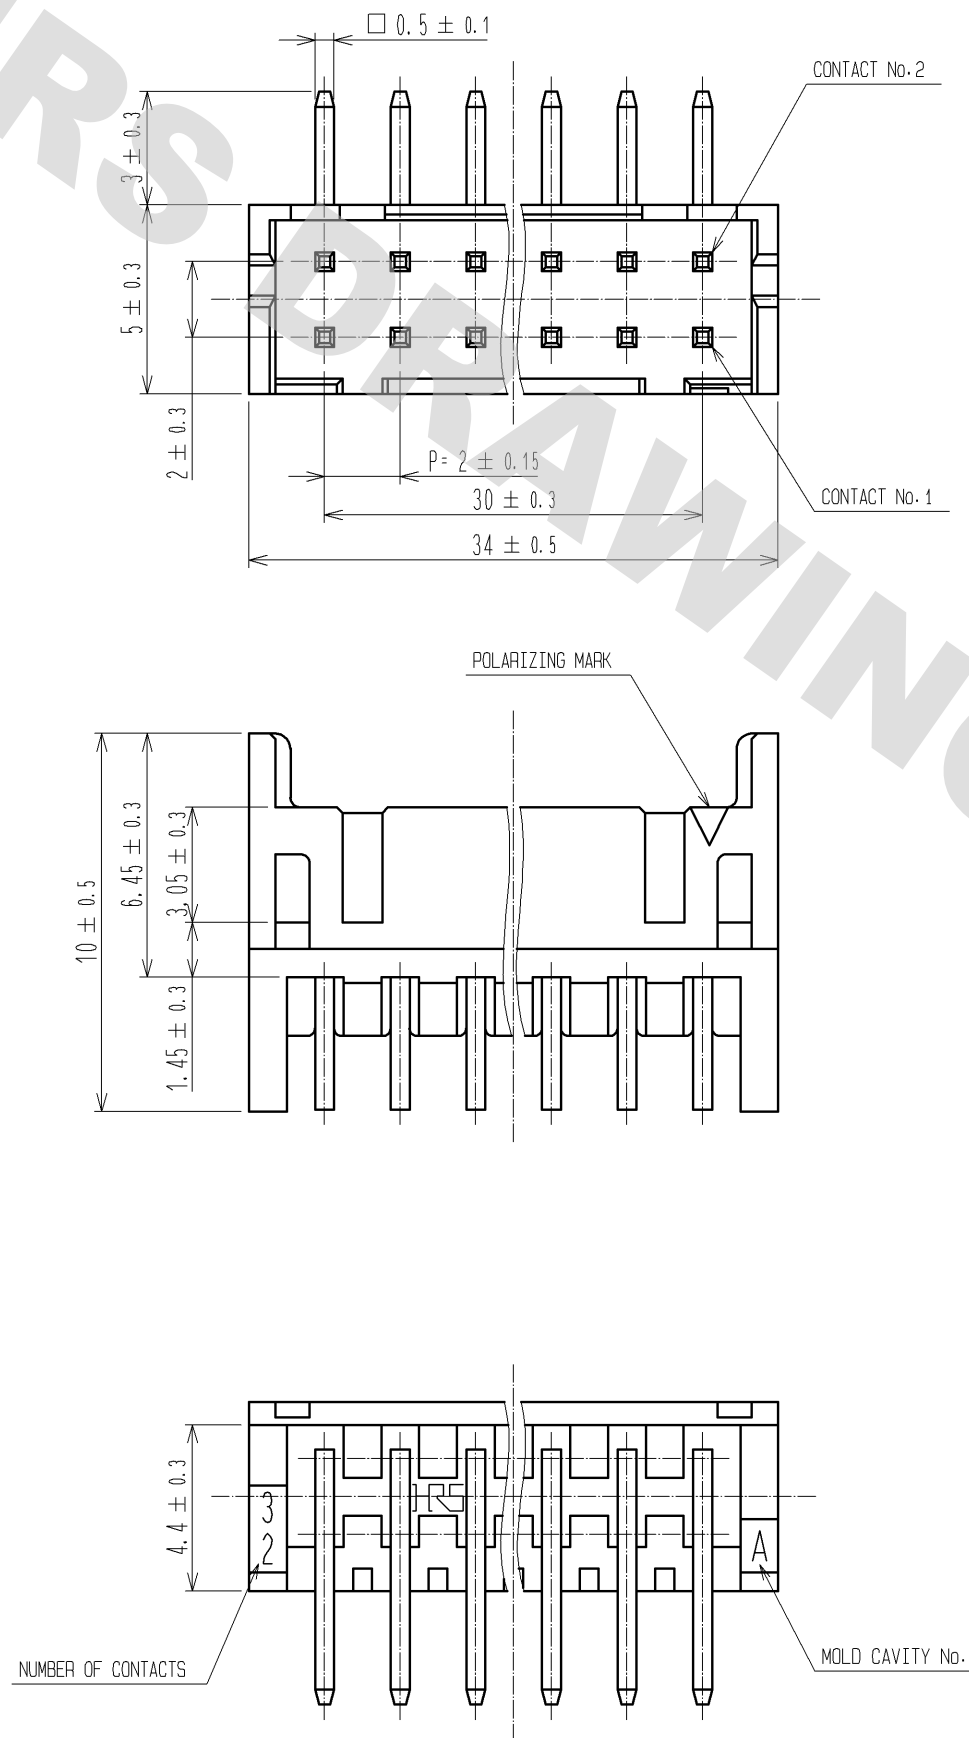


			5	EPTR-M	STOPPER, GRAY
2	BRASS	SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min	4	PS	ELECTROSTATIC PROTECTION, CLEAR
1	POLYAMIDE	UL94V-0, BLACK	3	BRASS	SURFACE:TIN PLATED 1μm min  UNDER PLATING:NICKEL PLATED 0.5μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm	 	SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-005308	DESIGNED MI. SAKIMURA	CHECKED TS. FUKUSHIMA	DATE 10. 11. 18
-------------	---	----------------	---	------------	--	--------------------------	--------------------------	--------------------

 HIROSE ELECTRIC CO., LTD.	APPROVED : TS. SAKATA	08. 10. 28	DRAWING NO.	EDC3-020847-01
	CHECKED : TS. KUMAZAWA	08. 10. 28	PART NO.	DF11-32DP-2DS(24)
	DESIGNED : KT. ISHII	08. 10. 21	CODE NO.	CL543-0547-6-24
	DRAWN : KT. ISHII	08. 10. 21		 

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

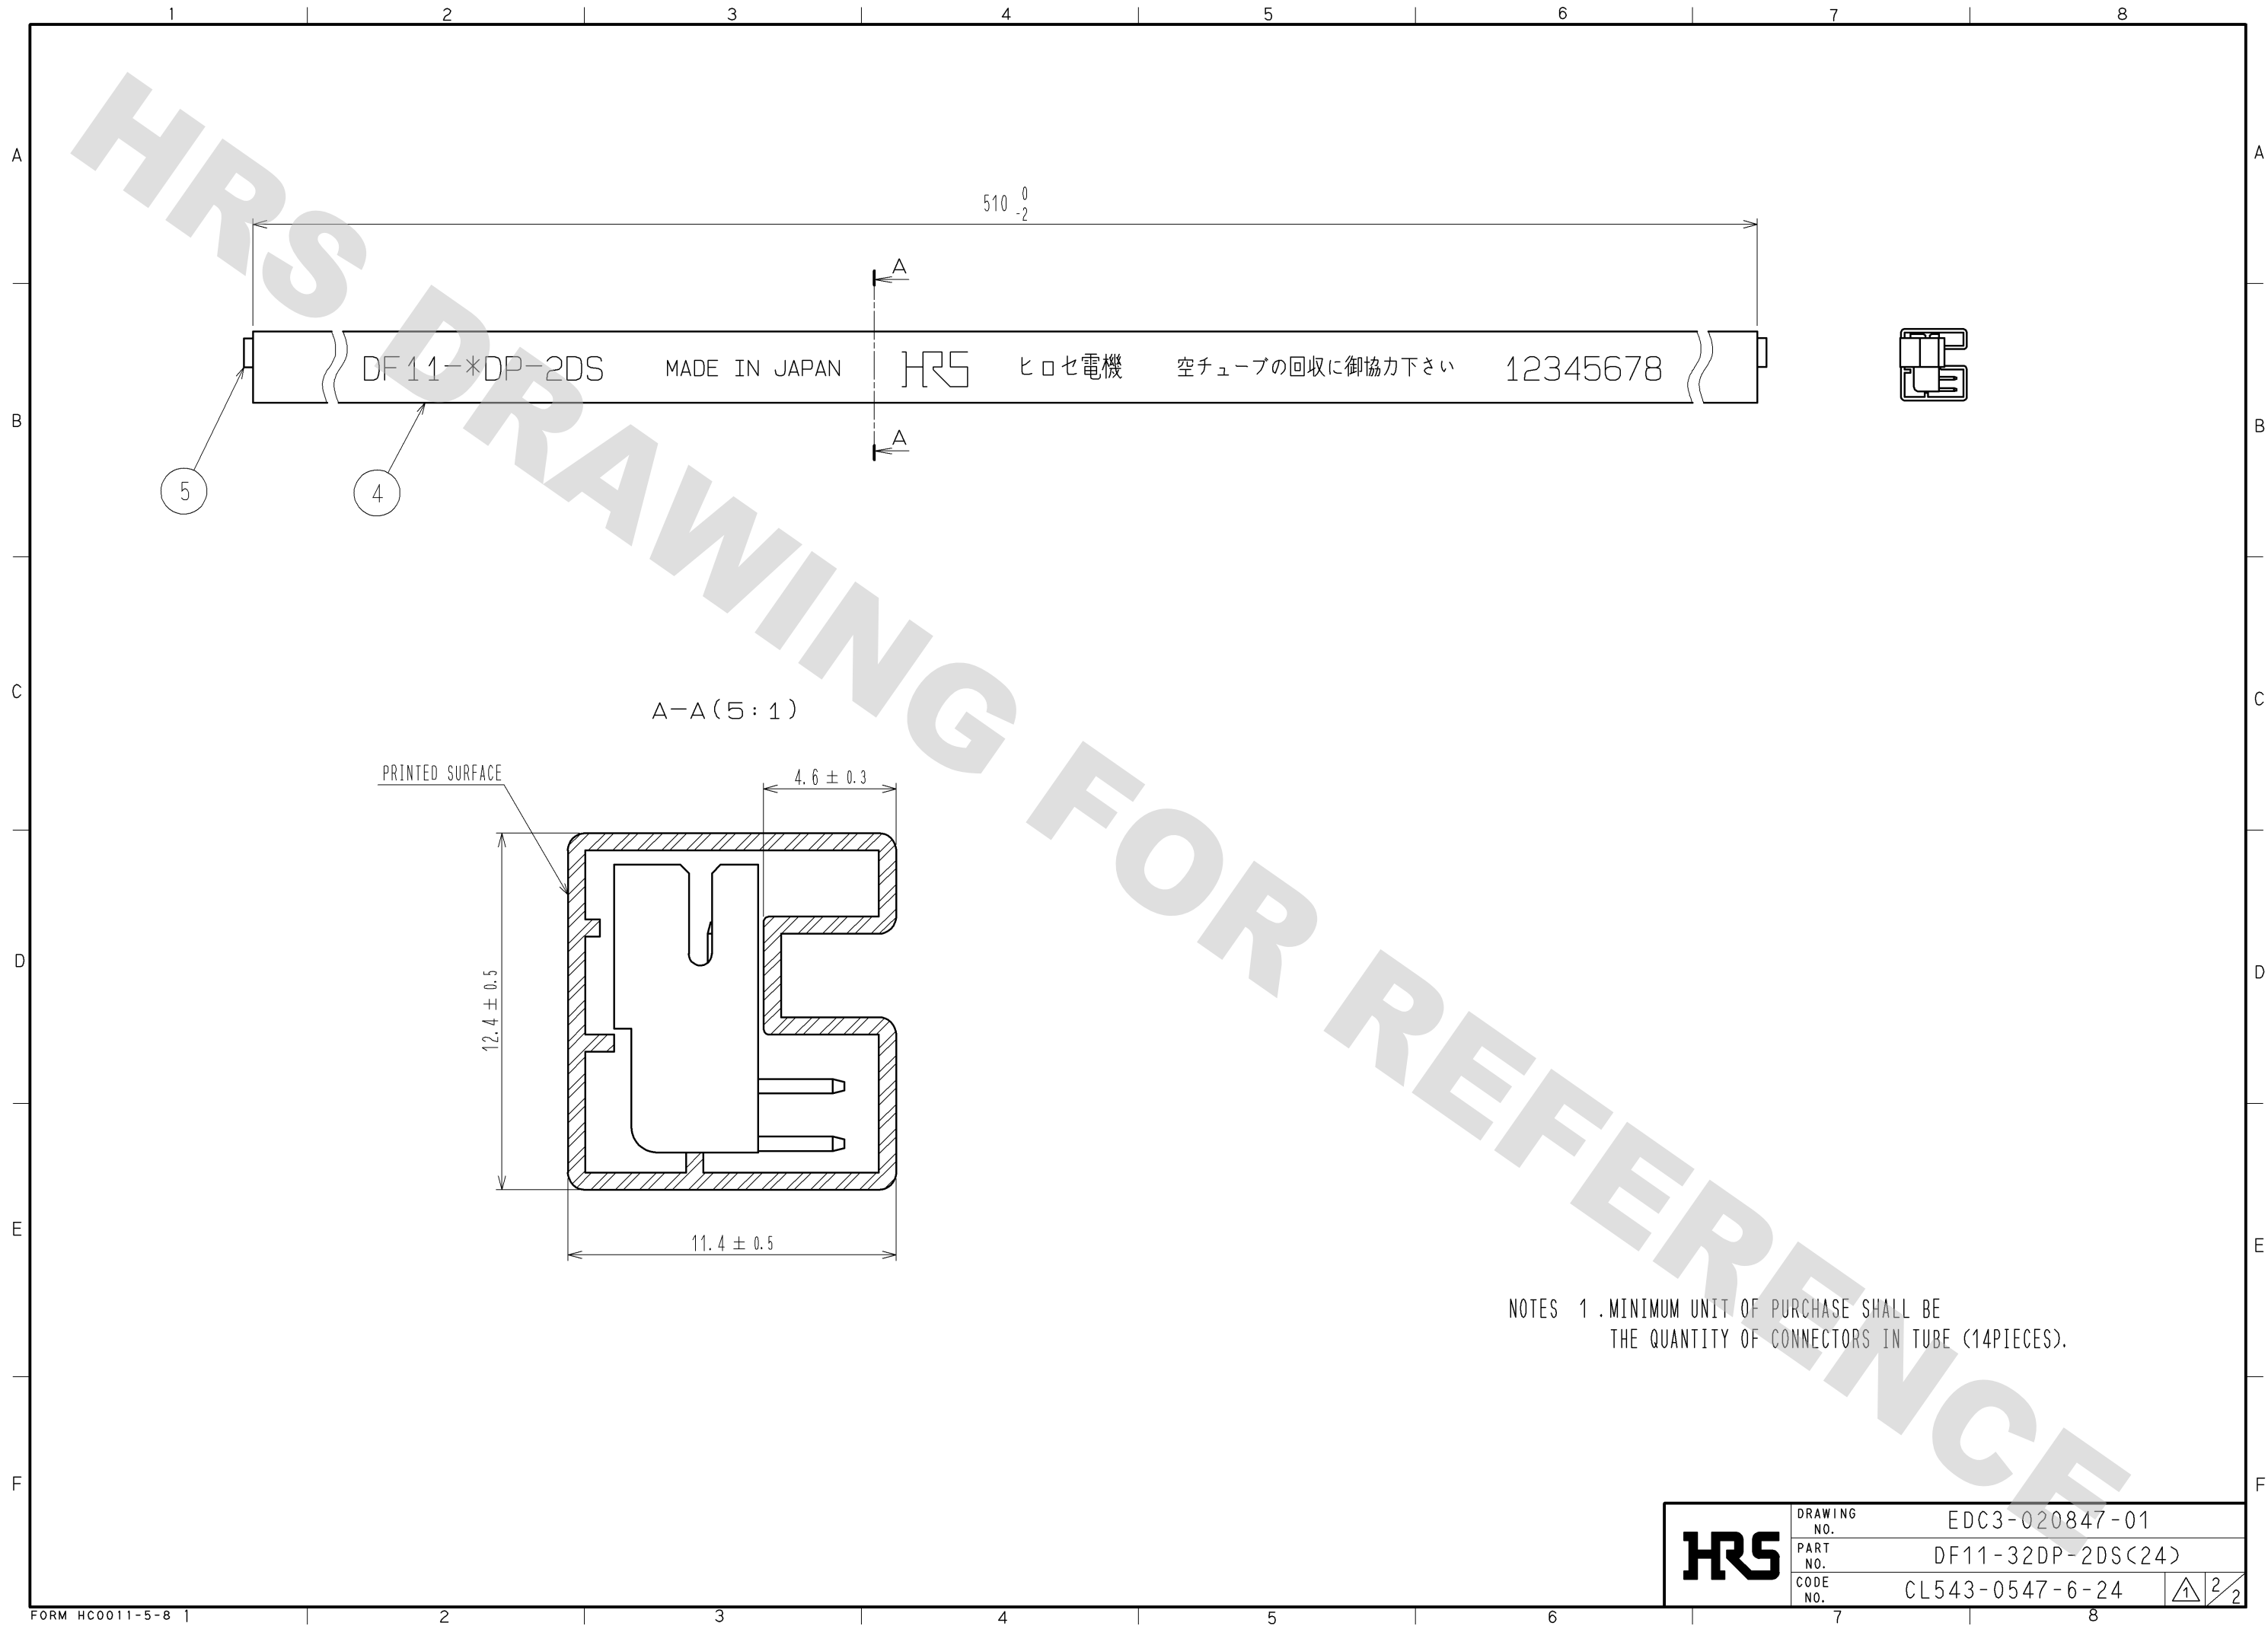

NOTES 1. MINIMUM UNIT OF PURCHASE SHALL BE
THE QUANTITY OF CONNECTORS IN TUBE (14PIECES).

HRS

DRAWING NO.	EDC3-020847-01		
PART NO.	DF11-32DP-2DS(24)		
CODE NO.	CL543-0547-6-24		$\frac{2}{2}$