



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO

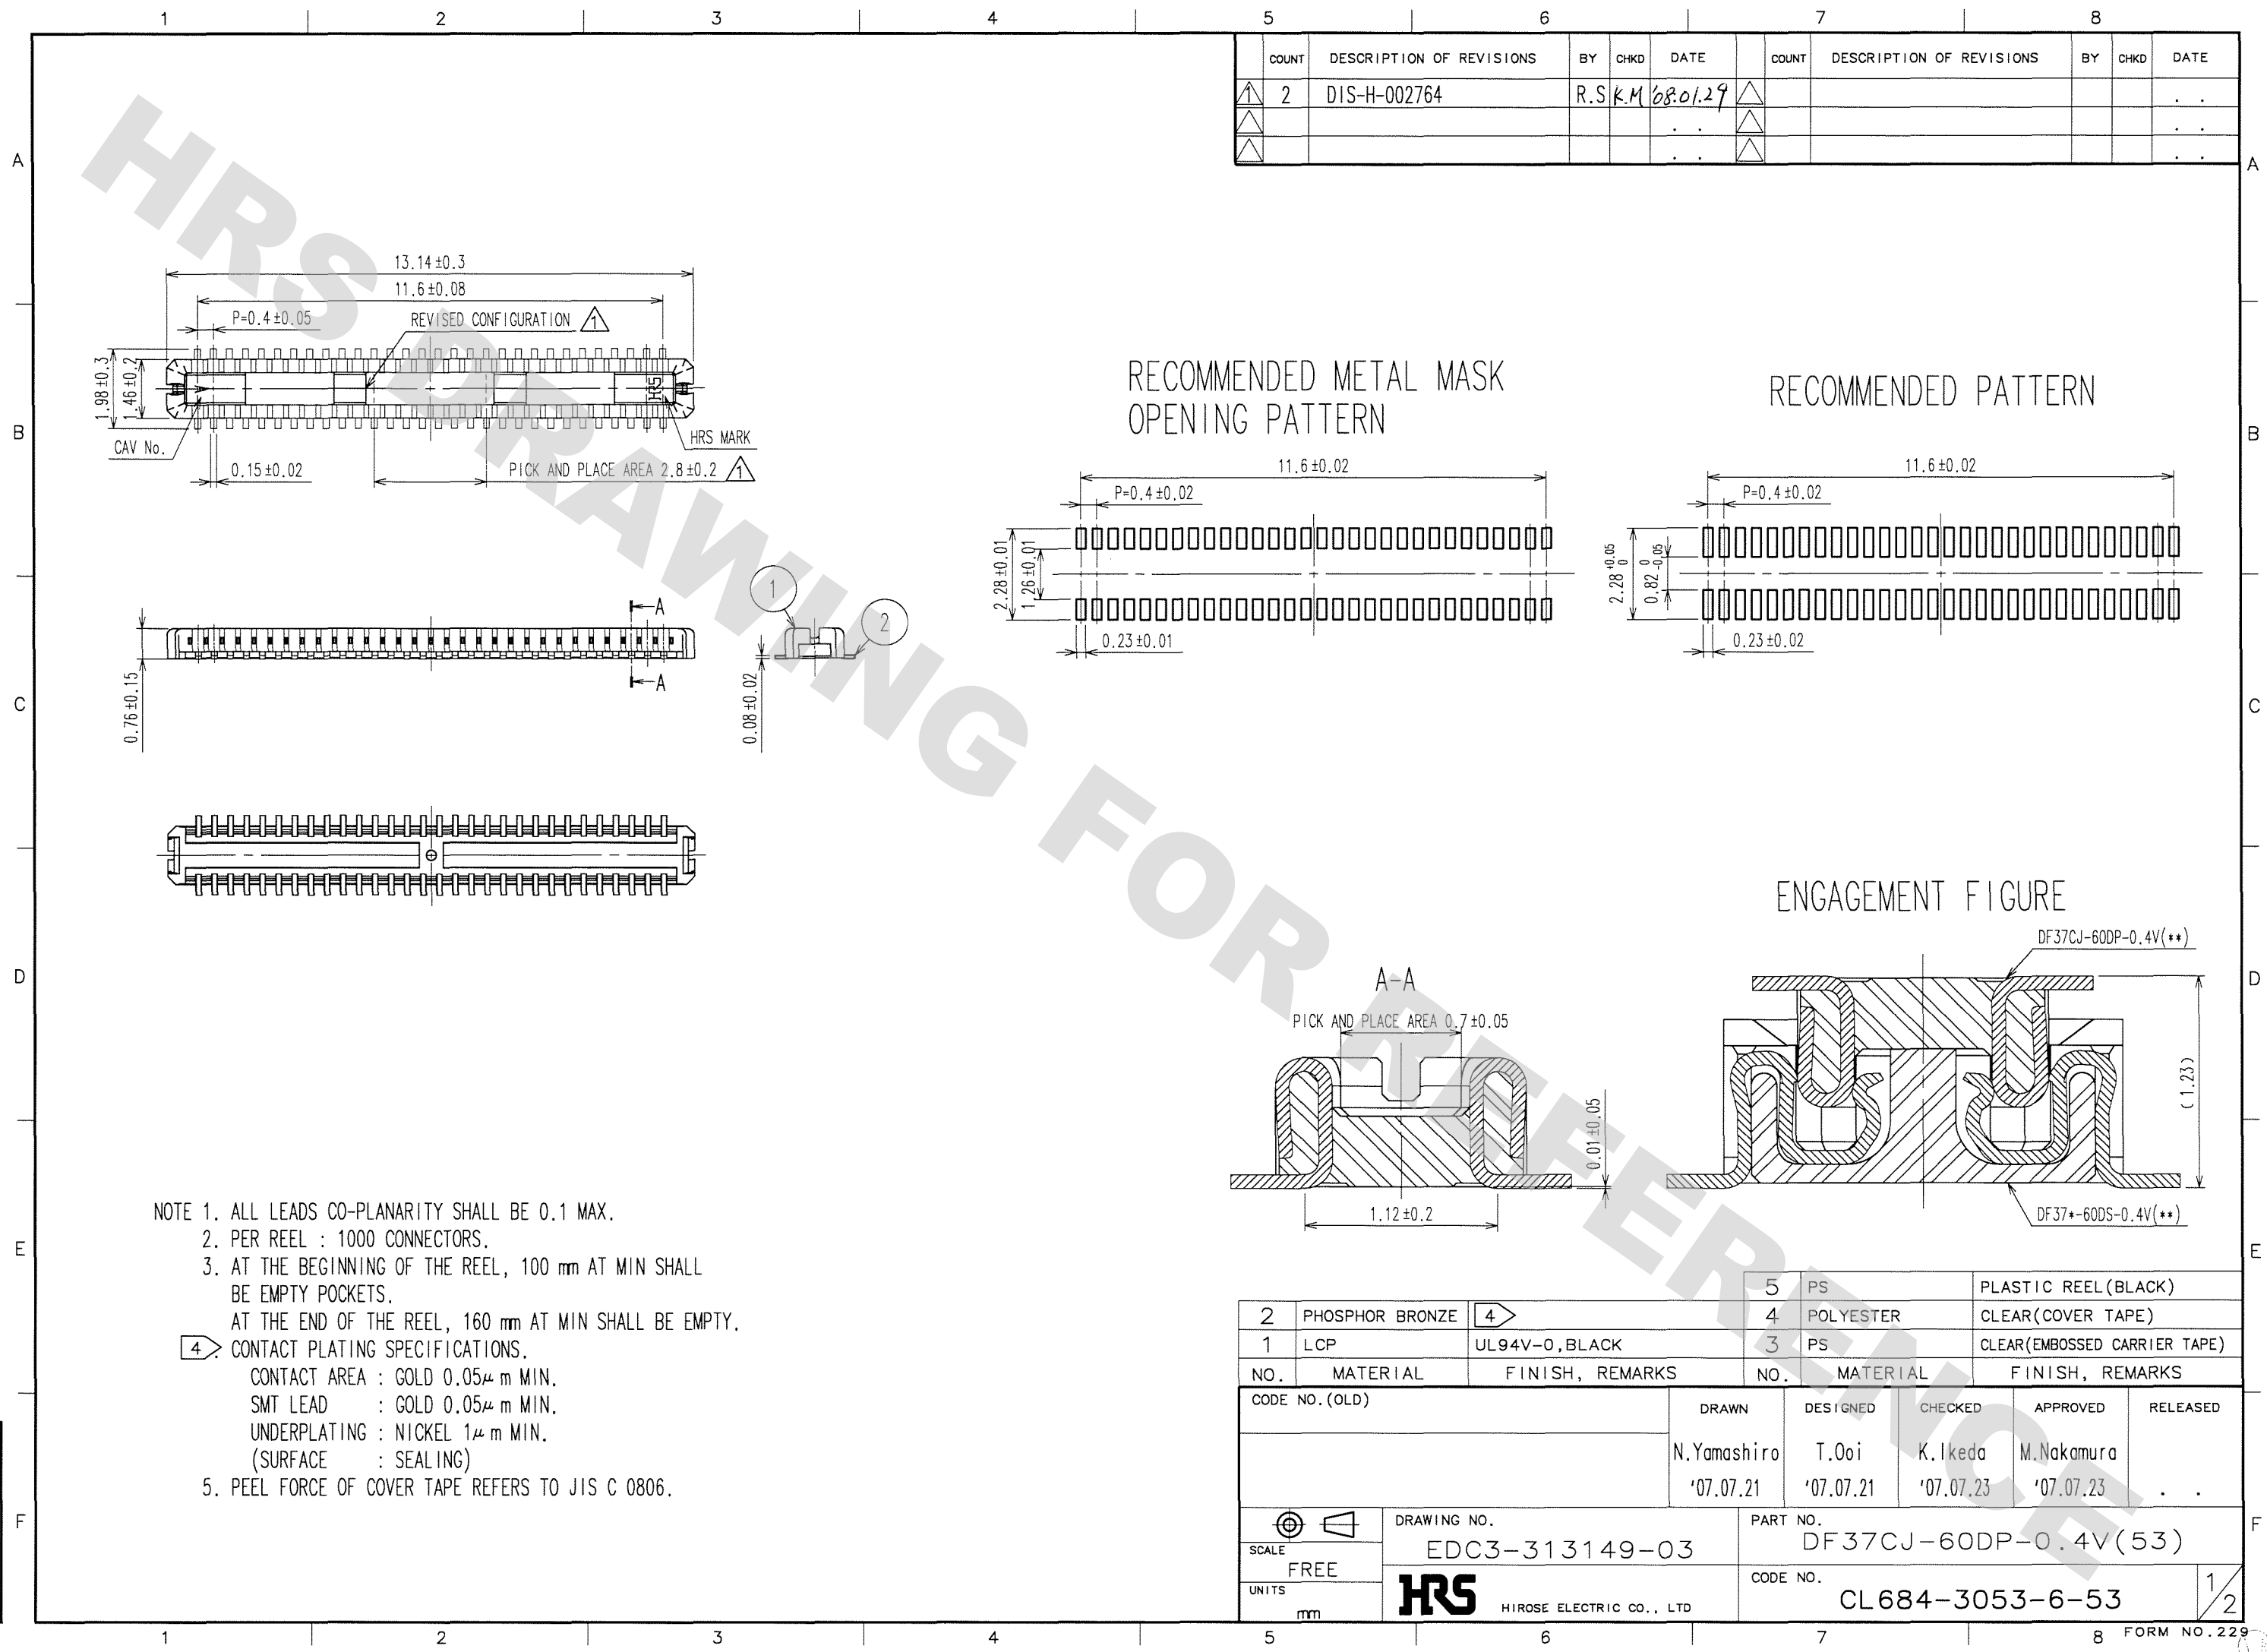


NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 1000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05μ m MIN.
SMT LEAD : GOLD 0.05μ m MIN.
UNDERPLATING : NICKEL 1μ m MIN.
(SURFACE : SEALING)
5. PEEL FORCE OF COVER TAPE REFERS TO JIS C 0806.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	DIS-H-002764	R.S	K.M	08.01.29					

2	PHOSPHOR BRONZE	4	PS	PLASTIC REEL (BLACK)		
1	LCP	UL94V-0, BLACK	4	POLYESTER	CLEAR(COVER TAPE)	
			3	PS	CLEAR(EMBOSSED CARRIER TAPE)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		N.Yamashiro	T.Ooi	K.Ikeda	M.Nakamura	
		'07.07.21	'07.07.21	'07.07.23	'07.07.23	.
		DRAWING NO.		PART NO.		
SCALE		EDC3-313149-03		DF37CJ-60DP-0.4V(53)		
FREE		 HIROSE ELECTRIC CO., LTD		CODE NO.		1 2
UNITS				CL684-3053-6-53		
mm						


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO

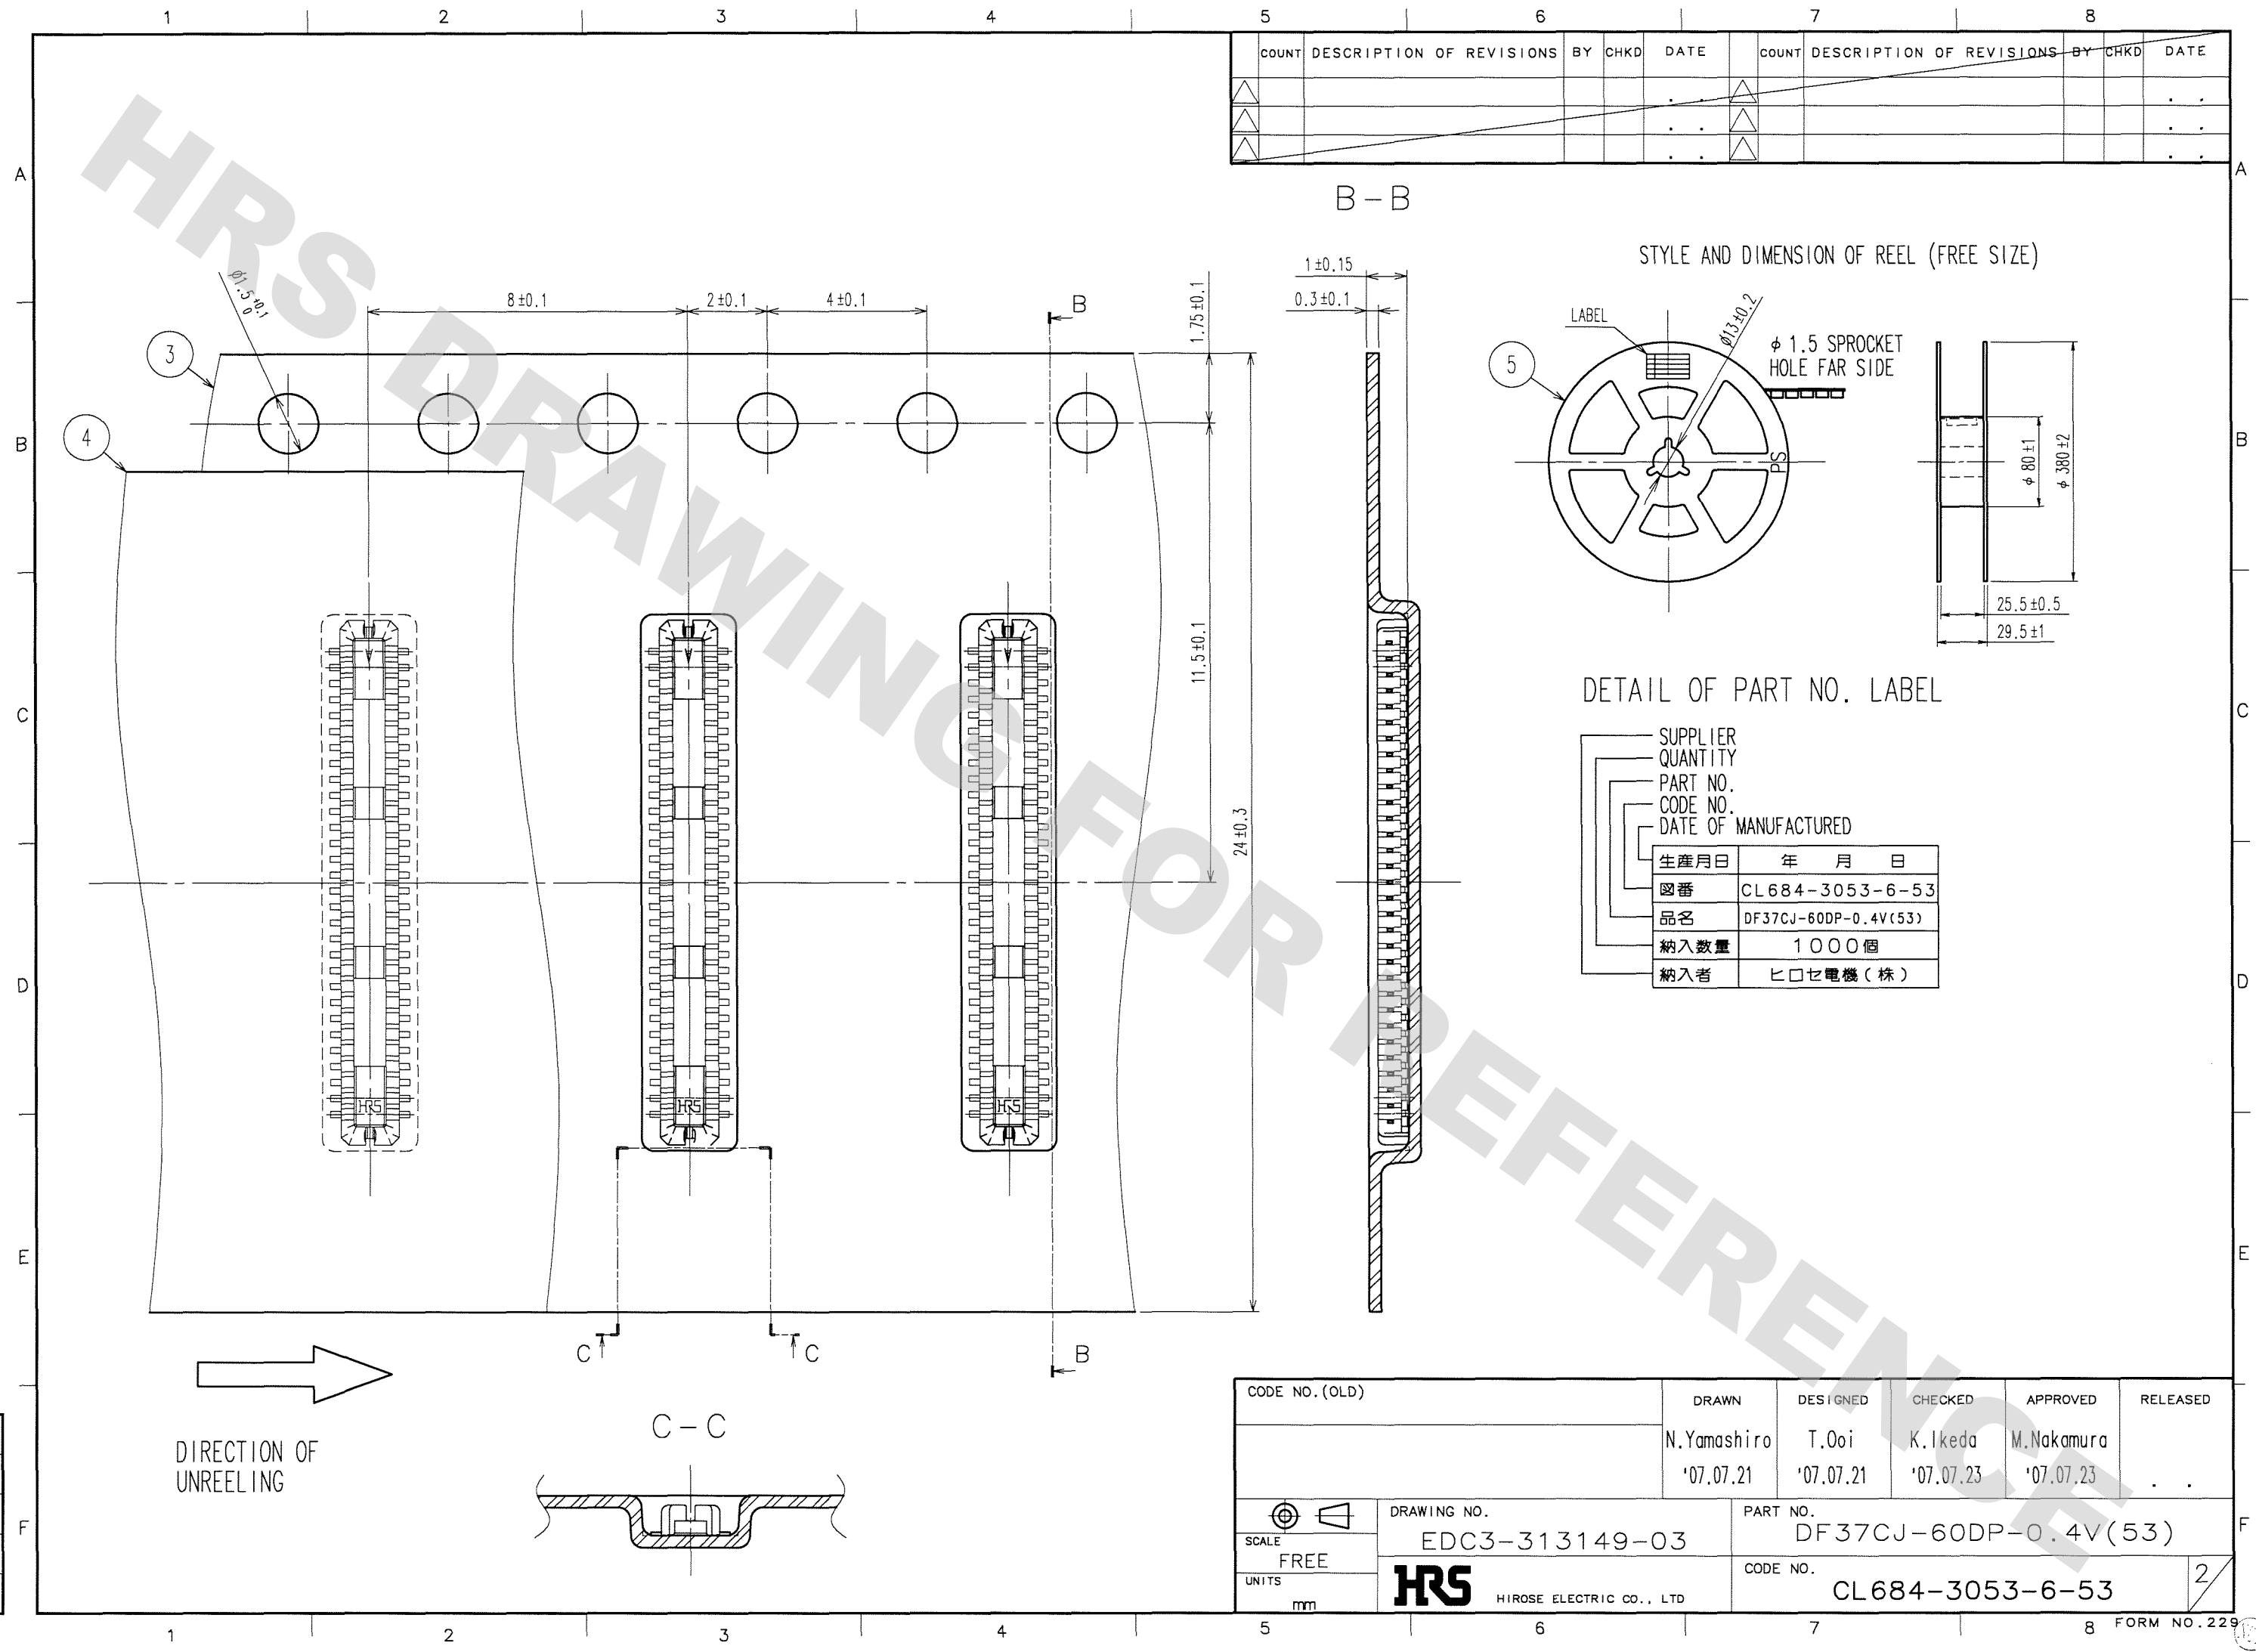

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

STYLE AND DIMENSION OF REEL (FREE SIZE)

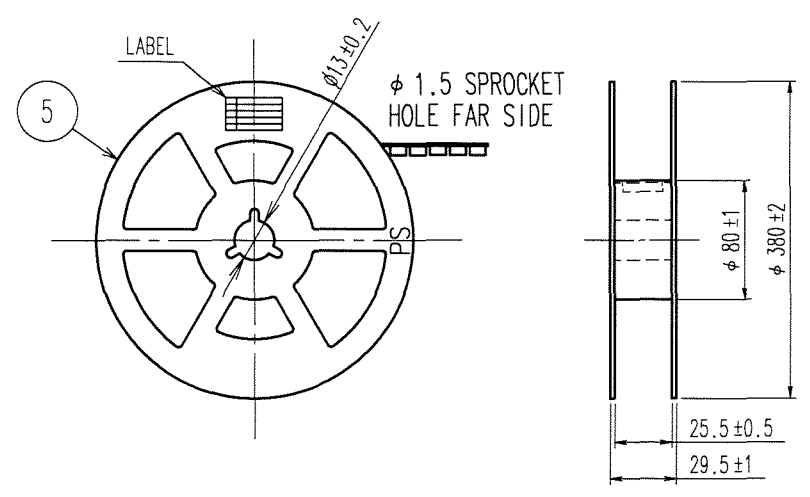

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL684-3053-6-53
品名	DF37CJ-60DP-0.4V(53)
納入数量	1000個
納入者	ヒロセ電機(株)

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	N.Yamashiro	T.Ooi	K.Ikeda	M.Nakamura	
	'07.07.21	'07.07.21	'07.07.23	'07.07.23	
DRAWING NO.	PART NO.				
EDC3-313149-03	DF37CJ-60DP-0.4V(53)				
SCALE	CODE NO.				
FREE	CL684-3053-6-53				
UNITS	2				
mm					