



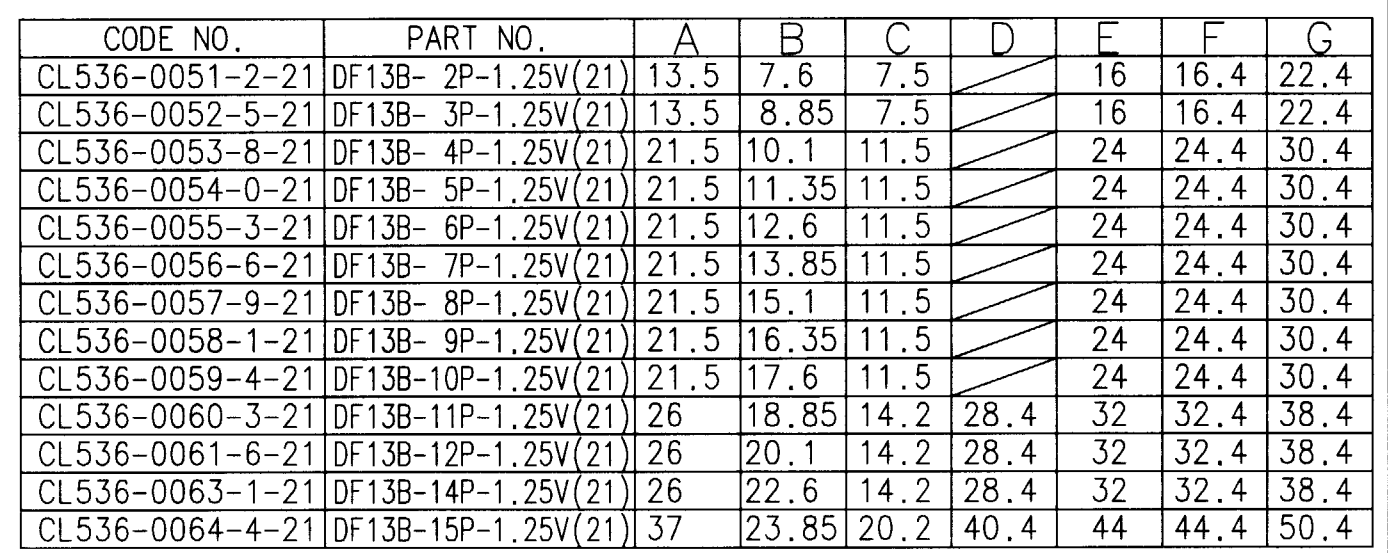

NOTES 1 : 1REEL:1000 CONNECTORS.
2 : AT THE BEGINNING OF THE REEL,30 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
3 : WHEN THE TAPE WIDTH IS 32 OR 44mm, SPROCKET HOLES SHALL BE
SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.
4 : WHEN THE TAPE WIDTH IS 44mm OR OVER, THE TOLERANCE SHALL BE 2 ± 0.15 .
5 : DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
6 : CONFIGURATION OF COMPONENT COMPARTMENT SHALL BE CHANGED TO
FIGURE SHOW BELOW.

	BEFORE MODIFIED	AFTER MODIFIED
1		
1		

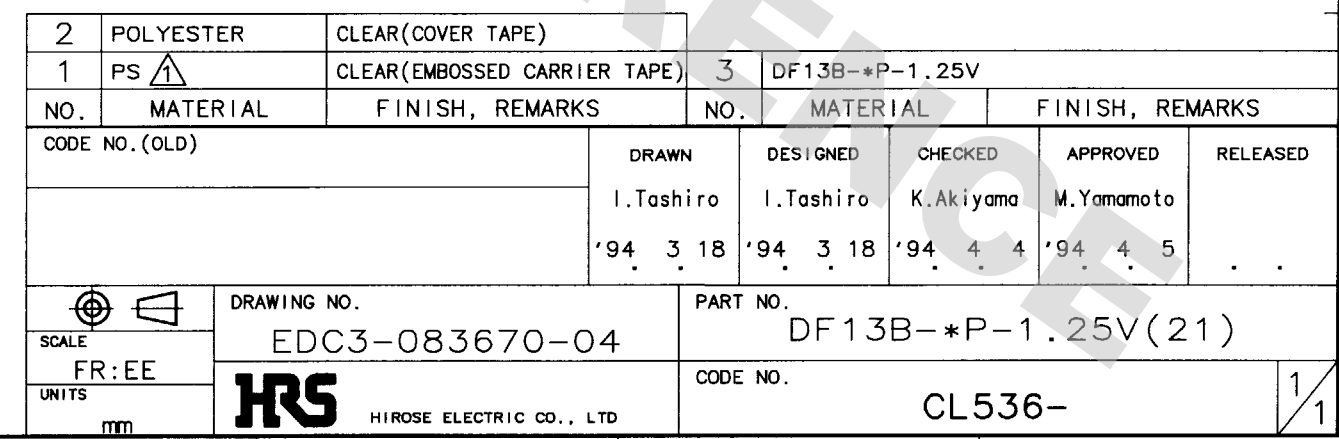

TO