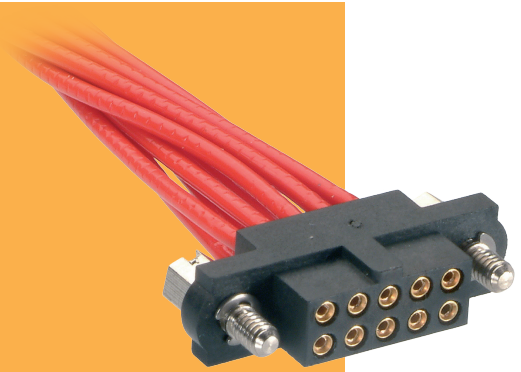


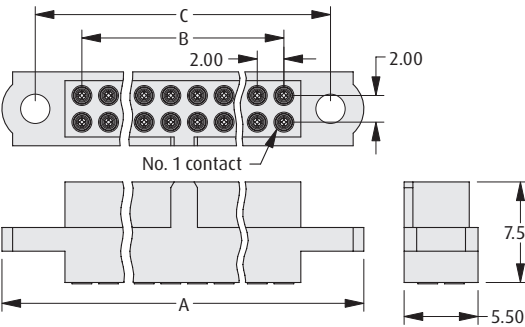
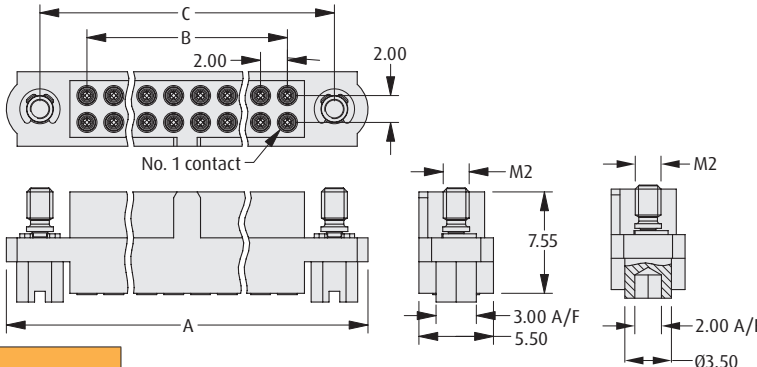
Datamate J-Tek Connectors


Female Crimp Kit

- ❖ Part numbers are for a complete kit of a housing and the applicable number of contacts.
- ❖ Jackscrews are assembled where specified.
- ❖ Crimp contacts are rear insertable.
- ❖ Version also available for 28 – 32 AWG cable – see the following page.
- ❖ Spare contacts are available.



DATAMATE J-TEK

WITHOUT JACKSCREWS		WITH JACKSCREWS									
											
<table><tr><th colspan="2">CALCULATION</th></tr><tr><td>A</td><td>B + 12</td></tr><tr><td>B</td><td>Total no. of contacts - 2</td></tr><tr><td>C</td><td>B + 7</td></tr></table>		CALCULATION		A	B + 12	B	Total no. of contacts - 2	C	B + 7	<div>Hex Slotted Jackscrew</div> <div>Hex Socket Jackscrew</div>	
CALCULATION											
A	B + 12										
B	Total no. of contacts - 2										
C	B + 7										

TOOLS		WIRE STRIPPING DETAILS	
<p>Recommended Crimp Tool – M22520/2-01</p> <p>Positioner – T5747</p> <p>Contact Insertion/Removal Tool – Z80-280</p> <p>❖ Spare and pre-cabled contacts shown on following pages.</p> <p>❖ Instruction sheets available at www.harwin.com/instructions.</p>			

HOW TO ORDER			
M80 - 4XX XX XX			
SERIES CODE		FINISH	
LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)	05	Gold
470	471	42	Gold + Tin

All dimensions in mm.