

M300 Connectors


Female Cable Assemblies

- 4-finger Beryllium Copper contact.
- No. 1 position identified on housing.
- 10A current capacity, resists high vibration and shock.
- Back potted for added strain relief.



M300

FEMALE

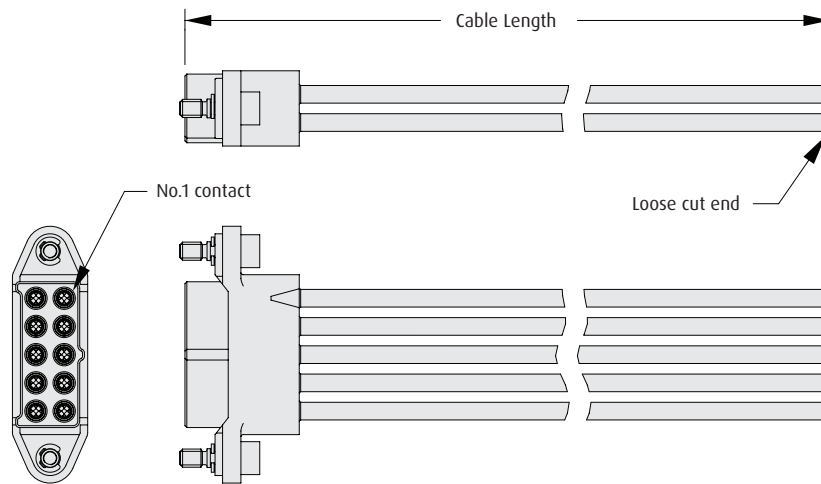

HOW TO ORDER

M300 - F C X XX 05 F2 - XXXX L

SERIES CODE

GENDER - FIRST END

F Female

CABLE SIZE

1	18 AWG, for Double Row
2	20 AWG, for Double Row
3	22 AWG, for Double Row
5	18 AWG, for Single Row
6	20 AWG, for Single Row
7	22 AWG, for Single Row

TERMINATION - SECOND END

L Loose cut end

CABLE LENGTH

0150	150mm
0300	300mm
0450	450mm

FIXING

F2 Hex Socket Jackscrew

TOTAL NO. OF CONTACTS

03	Single Row
06, 10	Double Row

All dimensions in mm.