


Gecko-MT Connectors

Female Vertical Throughboard

- ❑ 2A current rating for signal contacts, 10A for power contacts.
- ❑ Stainless steel floating screw fixing to mate with internal screw-loks on male connectors.
- ❑ 4-finger Beryllium Copper contact design on both signal and power contacts.
- ❑ Positive keyway polarization.



GECKO-MT

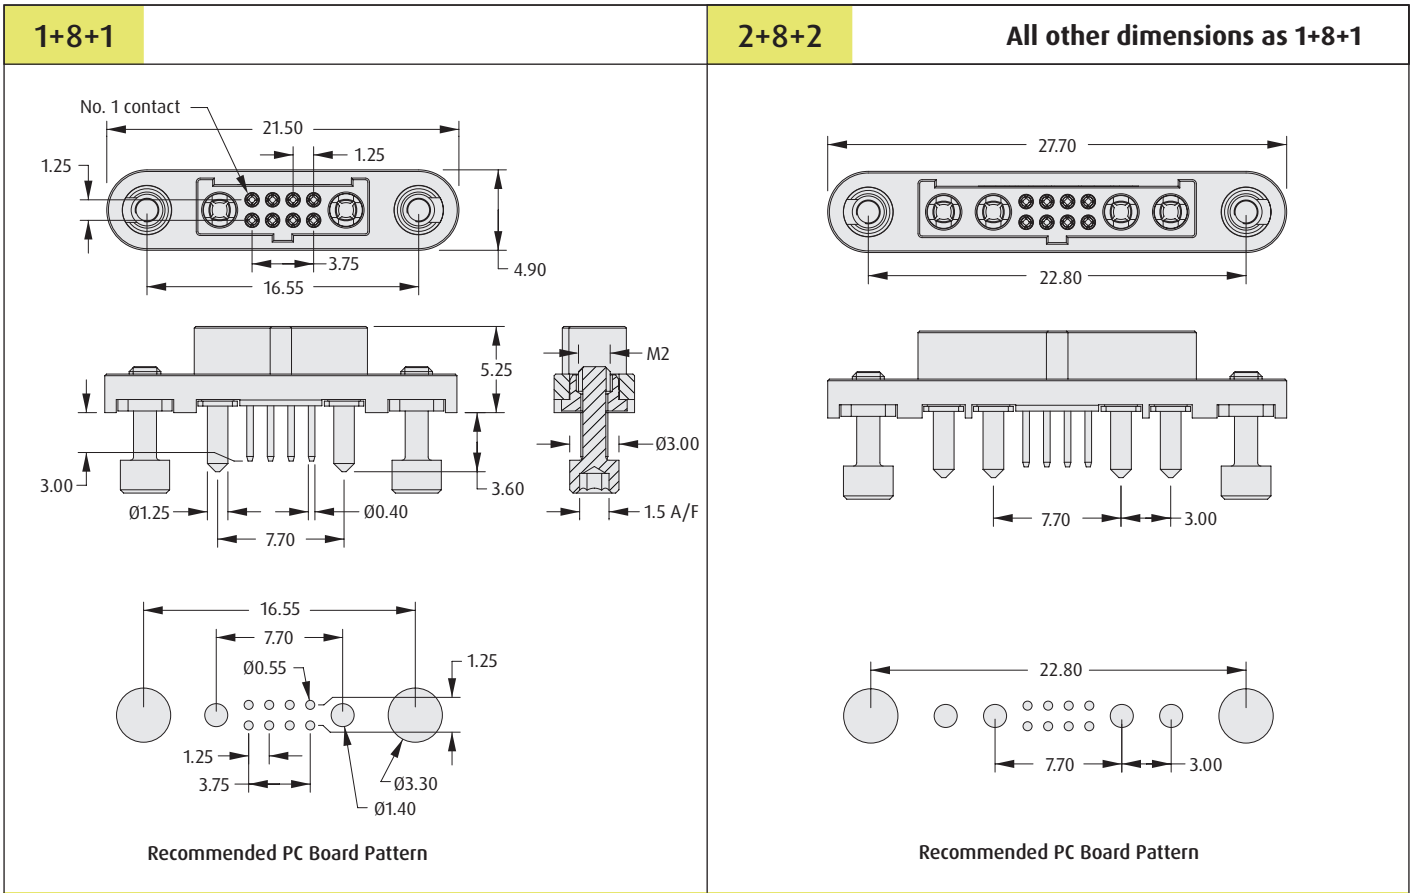

HOW TO ORDER

G125 - FV1 08 05 F1 - XABXAB P

SERIES CODE	PACKAGING
TOTAL NO. OF SIGNAL CONTACTS	POWER CONTACTS
SCREW-LOK	

08 | **1AB1AB** 1+8+1 Configuration | **P** Tape & Reel strips
F1 Floating Hex Socket | **2AB2AB** 2+8+2 Configuration

All dimensions in mm.

Patent Published