
MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING
ISE2-T

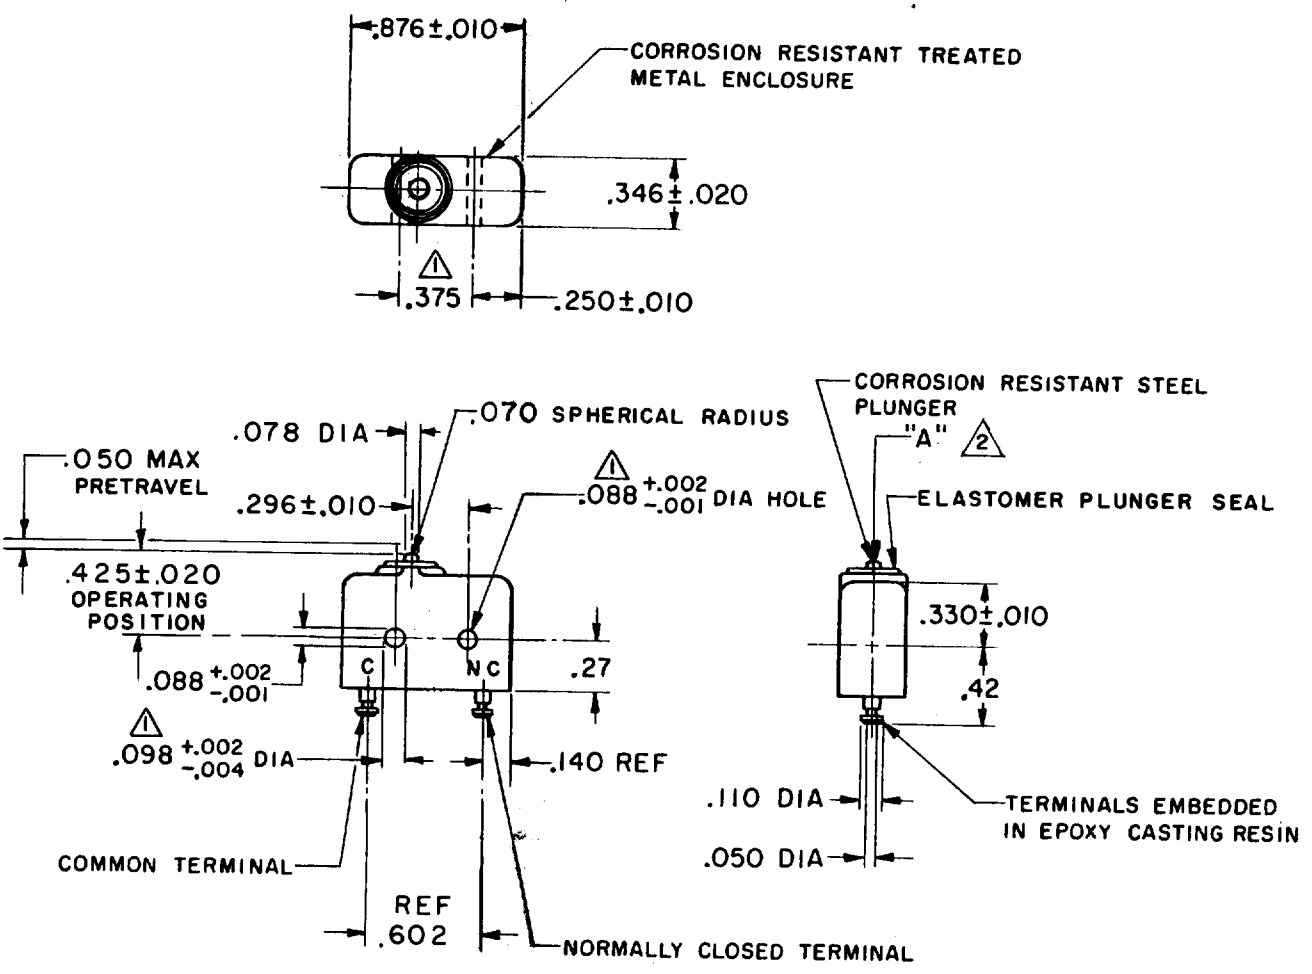

NOTE -
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
2 - ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	5-17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT: S P N C

250 VAC — 5 AMP

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .26 OZ MAX

ISE2-T | REPLACES | RELEASE NO. SR 10107 | DRAWING NUMBER M | ISSUE 3

REVISIONS

A	CO-34213	J A L 24 SEPT 74
B	CO-57041-A	C J H 26 MAR 85

CHECK | DRAWN MBF 27 FEB 62 | CHECK | DAW 28FEB62 | CHECK BRS 28FEB62

FO-30378