


KEMET Part Number: PEH534PDE4330M2
(A561EF332M100A)

Aluminum Electrolytic, 105C, KEMET, PEH534, 3300 uF, 20%, 100 V, -40/+105C

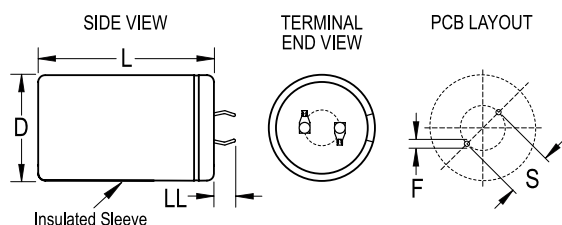

Dimensions

D	35mm +1mm
L	40mm +/-2mm
S	10mm +/-0.1mm
LL	6.3mm +/-1mm
F	2mm +/-0.1mm

Packaging Specifications

Weight:	56 g
Packaging:	Bulk
Packaging Quantity:	100

General Information

Dielectric:	Aluminum Electrolytic
Supplier:	KEMET
Series:	PEH534
Description:	Snap-In, Aluminum Electrolytic
RoHS:	Yes
Lead:	2 Pin
Notes:	Add 0.5mm To D And 1mm To L For Sleeving

Specifications

Capacitance:	3300 uF
Capacitance Tolerance:	20%
Voltage DC:	100 VDC
Temperature Range:	-40/+105C
Rated Temperature:	105C
Life:	3000 Hrs (Rated Voltage And Ripple Current At 105C), 4000 Hrs (Rated Voltage At 105C)
Resistance:	64 mOhms (100Hz 20C), 50 mOhms (100kHz 20C)
Current:	3.3 Amps (100Hz 105C), 11.7 Amps (20kHz 40C)
Leakage:	990 uAmps (5min 20C)