



T340, Tantalum, MnO2 Tantalum, Commercial Grade, 10 uF, 20%, 35 VDC, Lead Spacing = 5mm

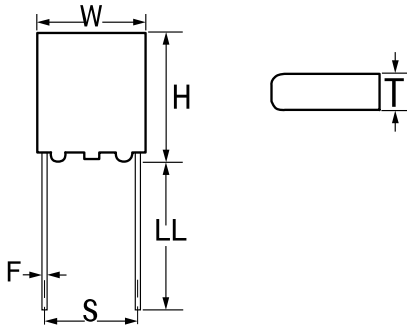

Dimensions	
W	7.3mm MAX
H	10.5mm MAX
T	4.3mm MAX
S	5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	200

General Information	
Series:	T340
Dielectric:	MnO2 Tantalum
Style:	Radial Molded
Description:	Radial, Solid Tantalum, Molded
RoHS:	No
Prop 65:	 WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
SCIP Number:	a3b4e2e1-63ea-439e-a89a-743225502a7d
Termination:	Lead (SnPb)
AEC-Q200:	No
Construction:	Molded
Miscellaneous:	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes:	Longest Lead Is Positive.

Specifications	
Capacitance:	10 uF
Capacitance Tolerance:	20%
Voltage DC:	35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse)
Temperature Range:	-55/+125°C
Dissipation Factor:	6%
Leakage Current:	4 uA