


T490, Tantalum, MnO₂ Tantalum, Consumer, 220 uF, 20%, 4 VDC, SMD, MnO₂, Molded, Consumer, 500 mOhms, 3528, Height Max = 2.1mm

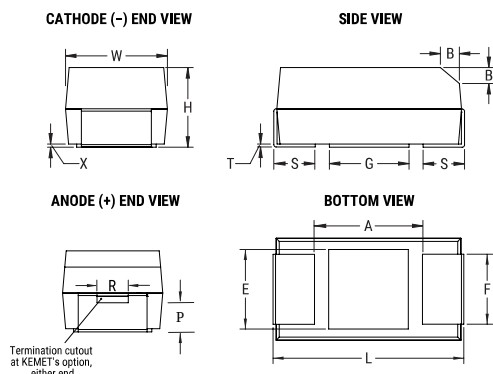

Dimensions

Footprint	3528
L	3.5mm +/-0.2mm
W	2.8mm +/-0.2mm
H	1.9mm +/-0.2mm
T	0.13mm REF
S	0.8mm +0.2/-0.3mm
F	2.2mm +/-0.1mm
A	1.9mm MIN
B	0.4mm +/-0.15mm
E	2.2mm REF
G	1.8mm REF
P	0.5mm REF
R	1mm REF
X	0.1mm +/-0.1mm

Packaging Specifications

Packaging:	T&R, 178mm
Packaging Quantity:	2000

General Information

Series:	T490
Dielectric:	MnO ₂ Tantalum
Style:	SMD Chip
Description:	SMD, MnO ₂ , Molded, Consumer
RoHS:	Yes
Termination:	Tin
AEC-Q200:	No
Component Weight:	107.45 mg
Shelf Life:	156 Weeks
MSL:	1

Specifications

Capacitance:	220 uF
Capacitance Tolerance:	20%
Voltage DC:	4 VDC (40C), 2 VDC (85C), 0.8 VDC (125C)
Temperature Range:	-55/+125°C
Rated Temperature:	40°C
Humidity:	40C, 93% RH, 1000 Hours, No Load
Failure Rate:	N/A
Resistance:	0.5 Ohms (100kHz 25C)
Ripple Current:	412 mAmps (100kHz 25C), 370.8 mAmps (40C), 164.8 mAmps (125C)
Leakage Current:	8.8 uA (5min 25°C)