



THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

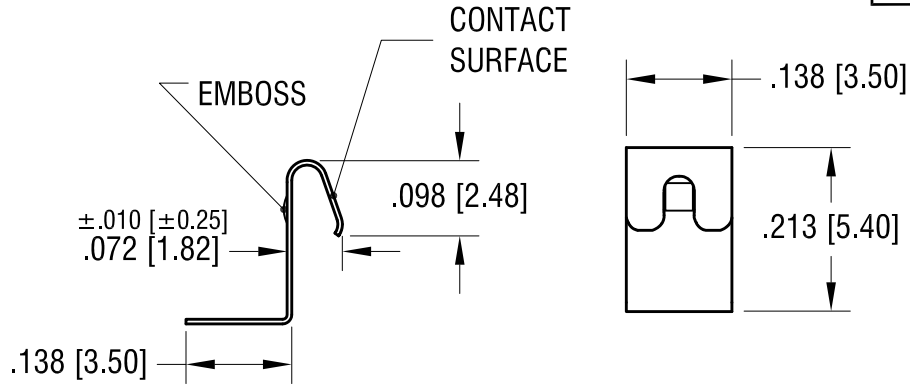

P/N 122

TOLERANCE ±.005 [±0.13]

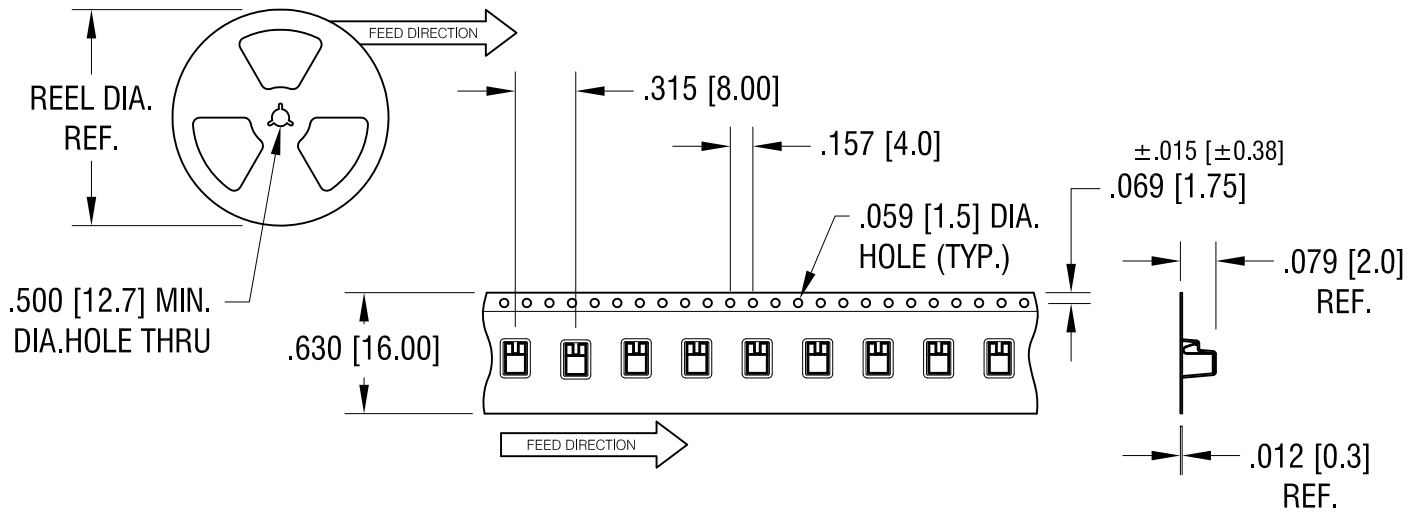

NOTES:

1. SUPPLIED ON TAPE AND REEL ONLY.

TAPE AND REEL SPECIFICATIONS:

2. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD

3. REEL:

13.0 [330.0] DIA. 1000 PIECES OF
P/N 122 PER REEL

CONTACT SPECIFICATIONS:

- MAT'L- .006 [0.15] TH'K STAINLESS STEEL
- FINISH: GOLD PLATE

12.12.16	CHANGE AS PER ECN 16-101	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME POSITIVE CONTACT ON TAPE & REEL			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY NT	DATE 1.06.16
		APP'D LN	SCALE N/A
TOLERANCES DECIMAL ANGULAR	INCH ±.010 [±0.25]	[MM]	CODE C
UNLESS OTHERWISE SPECIFIED			DWG NO. 122TR