


GSD

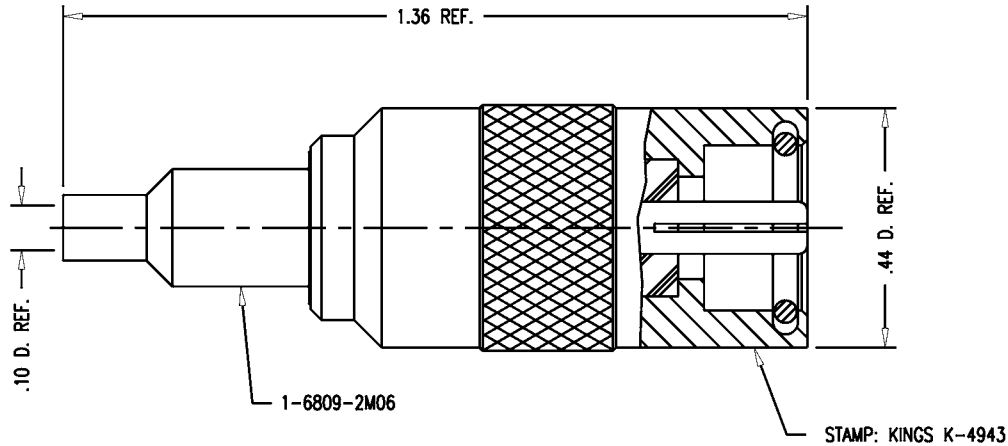

NOTES:

1. FOR USE WITH BOEING BMS13-48 (E/W48/XII/1-20) CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-558.
3. FOR CRIMPING USE DIE KTH-2223.
4. CENTER CONTACT, 1-6793-1MA9, SUPPLIED UNASSEMBLED.
5. MARK PACKAGE: KINGS K-4943
XXXX (DATE CODE)
6. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
C-RING: PHOSPHOR BRONZE, QQ-B-750
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
ALL OTHER METAL PARTS: BRASS, ASTM-B16
7. FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)

K-4943

REVISIONS

ISSUE	CHANGES	
0	ER JCA	34689 07/15/93

KAM2735

SCALE 4:1

APPROX SURFACE AREA

WAS: E-17928

USED ON

REF:

PLUG, SPECIAL

DRAWN	KH	DATE	04/26/93
DESIGN	CT	DATE	04/27/93
APPR.	JT	DATE	04/28/93

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

K-4943

GSD