

KVR400X64C25/256 256MB 32M x 64-Bit DDR400 CL2.5 184-Pin DIMM

DESCRIPTION:

This document describes ValueRAM's 32M x 64-bit (256MB) CL2.5 DDR400 SDRAM (Synchronous **DRAM**) memory module. The components on this module include eight 32M x 8-bit (8M x 8-bit x 4 Bank / 200MHz, 5.0ns) DDR400 SDRAM in TSOP packages. This 184-pin DIMM uses gold contact fingers and requires +2.5V. The electrical and mechanical specifications are as follows:

FEATURES:

✓ Clock Cycle Time (tCK)	5ns (min.) / 10ns (max.)
✓ Row Cycle Time (tRC)	55ns (min.)
✓ Refresh Row Cycle Time (tRFC)	70ns (min.)
✓ Row Active Time (tRAS)	40ns (min.) / 100,000ns (max.)
✓ Single Power Supply of	+2.5V (+/- .25V)
✓ Power (IDD0)	2.200 W (operating)
✓ UL Rating	94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

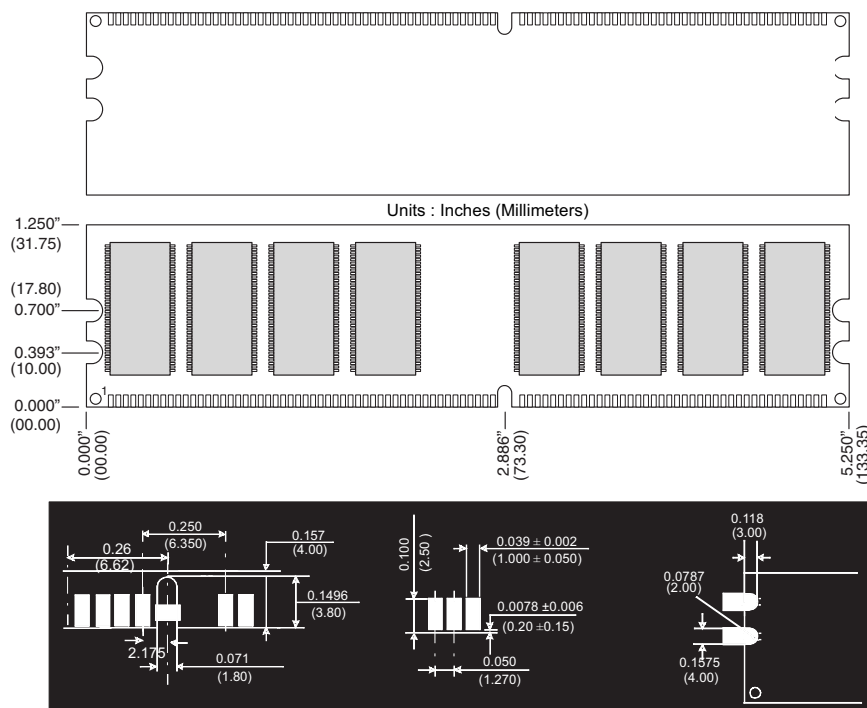


Figure 1: KVR400X64C25/256 184-Pin DDR SDRAM Module