

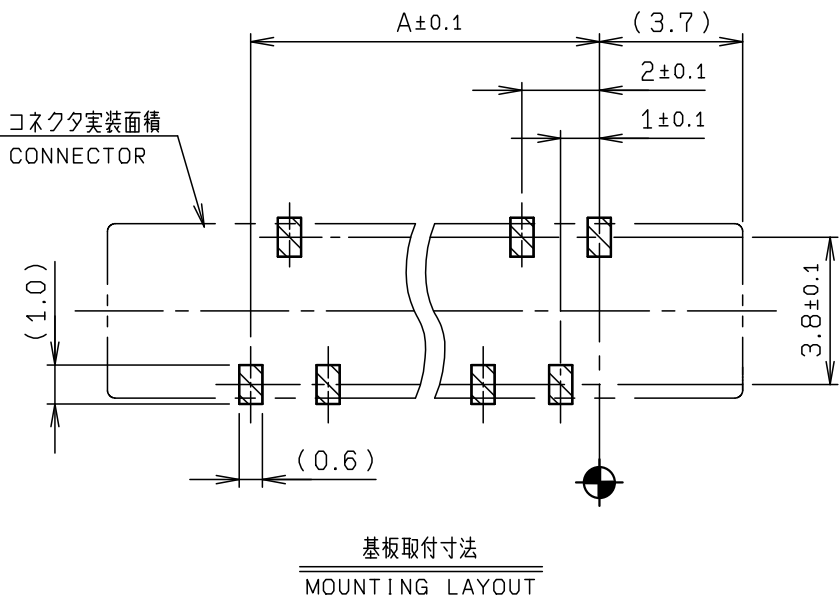


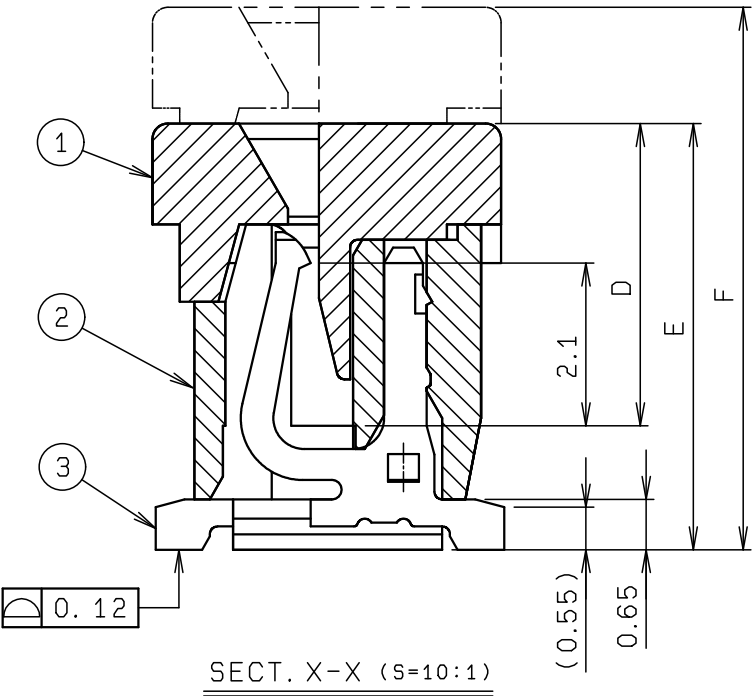

| NO. | DESCRIPTION | PART NO. | QTY | MATERIAL              | DRW NO. | REMARKS                |
|-----|-------------|----------|-----|-----------------------|---------|------------------------|
| 1   | ACTUATOR    |          | 1   | GF PPS                |         | UL94V-0<br>COLOR:BLACK |
| 2   | INSULATOR   |          | 1   | GF PPS                |         | UL94V-0<br>COLOR:BLACK |
| 3   | CONTACT     |          | N   | PHOS-BRONZE<br>(t0.3) |         | NI UNDERCOAT<br>Sn-Cu  |

| 極 数<br>NO. OF<br>POS | A    | B    | C    | D   | E   | F   | G   | H     |
|----------------------|------|------|------|-----|-----|-----|-----|-------|
| 26                   | 25.0 | 31.4 | 32.4 | 3.9 | 5.5 | 7.0 | 1.3 | 27.12 |
| 30                   | 29.0 | 35.4 | 36.4 | 3.9 | 5.5 | 7.0 | 1.3 | 31.12 |

※この表は2ページ目にのみ適用  
※THIS CHART IS APPLICABLE TO  
SHEET-2 ONLY.




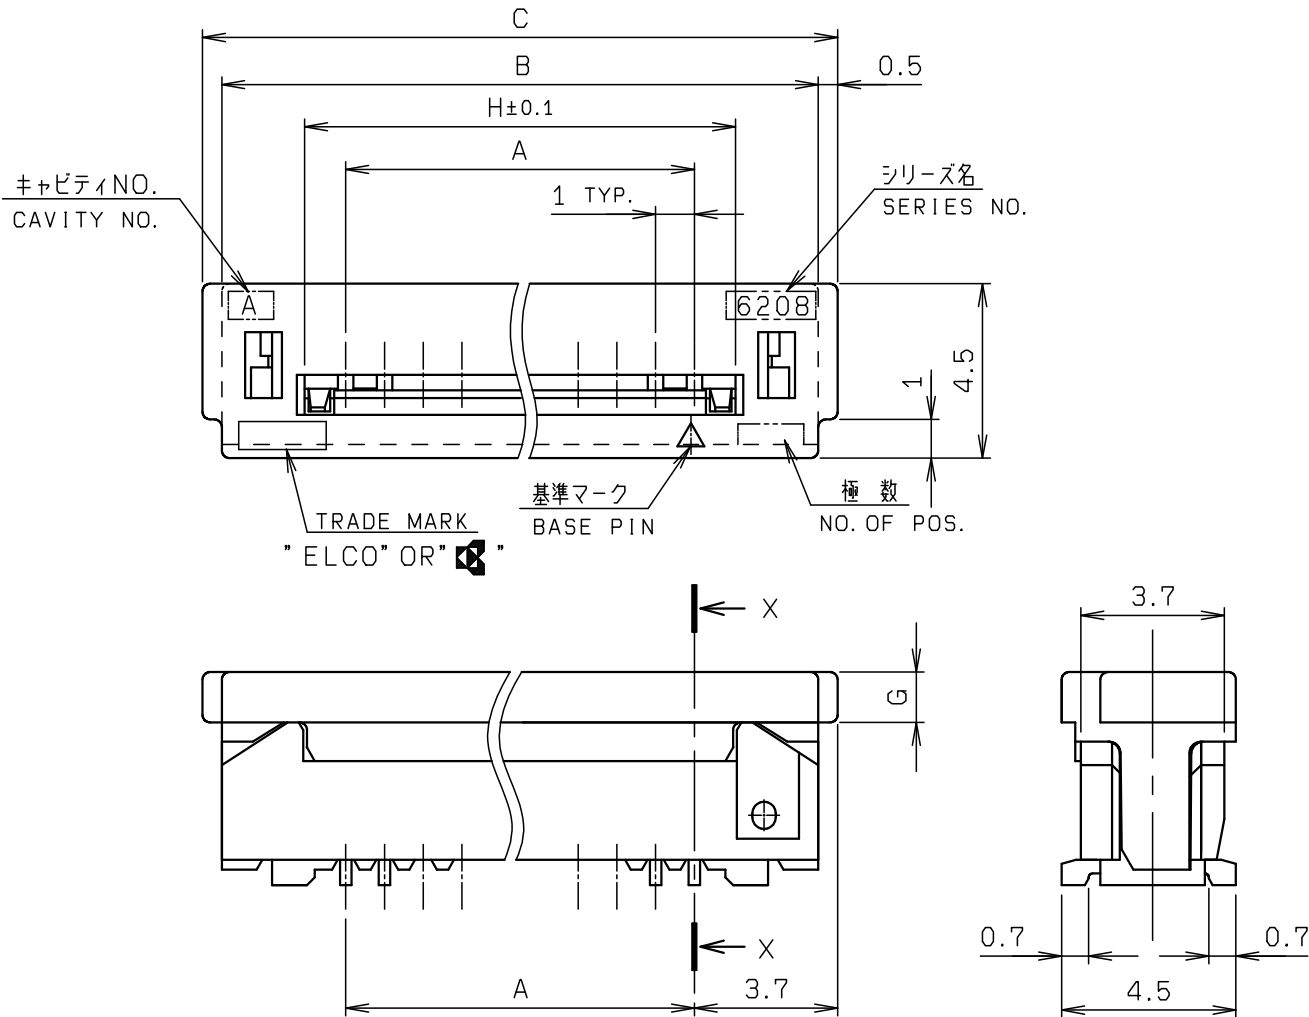


ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

|                     |  |                     |  |                     |  |                          |         |                         |          |
|---------------------|--|---------------------|--|---------------------|--|--------------------------|---------|-------------------------|----------|
| TOLERANCE / 一般公差(S) |  | PRODUCT SPEC / 製品規格 |  |                     |  |                          |         |                         |          |
| X <10 ±0.2          |  | UNIT mm             |  | ANGLE 3RD           |  | REFER TO SHEET 1/3       |         |                         |          |
| 10 ≤ X <30 ±0.25    |  | SCALE 5 : 1         |  | DATE 2016/07/14     |  | NO.                      | EDN/DCN | DATE                    | ISSUE    |
| 30 ≤ X ±0.3         |  | ANGLE / 角度 ±3°      |  | PART NAME / 品名      |  | SERIES 6208 FPC/FFC ASSY |         | CHECKED                 | APPROVED |
| DRAWN M. TAKAHASHI  |  | DESIGNED R. MAKABE  |  | CHECKED N. KITAGAWA |  | APPROVED Y. FUJII        |         | PART NO. / 型番           |          |
|                     |  |                     |  |                     |  |                          |         | 00 6208 5XX X10 000 / + |          |
|                     |  |                     |  |                     |  |                          |         | DWG NO. / 図番            |          |
|                     |  |                     |  |                     |  |                          |         | BJS 6208229             |          |
|                     |  |                     |  |                     |  |                          |         | SHEET/REV               |          |
|                     |  |                     |  |                     |  |                          |         | 2/3 B                   |          |



KYOCERA Corporation

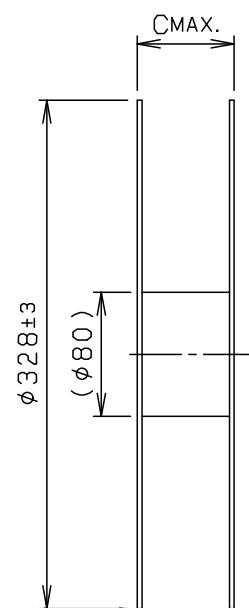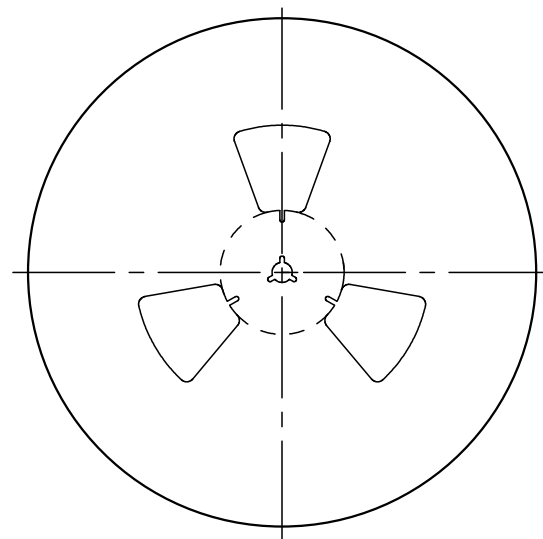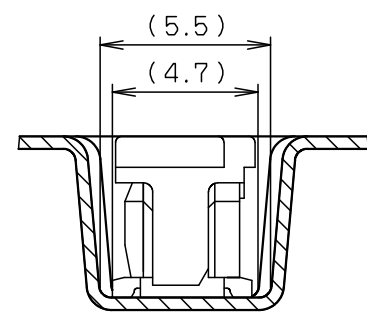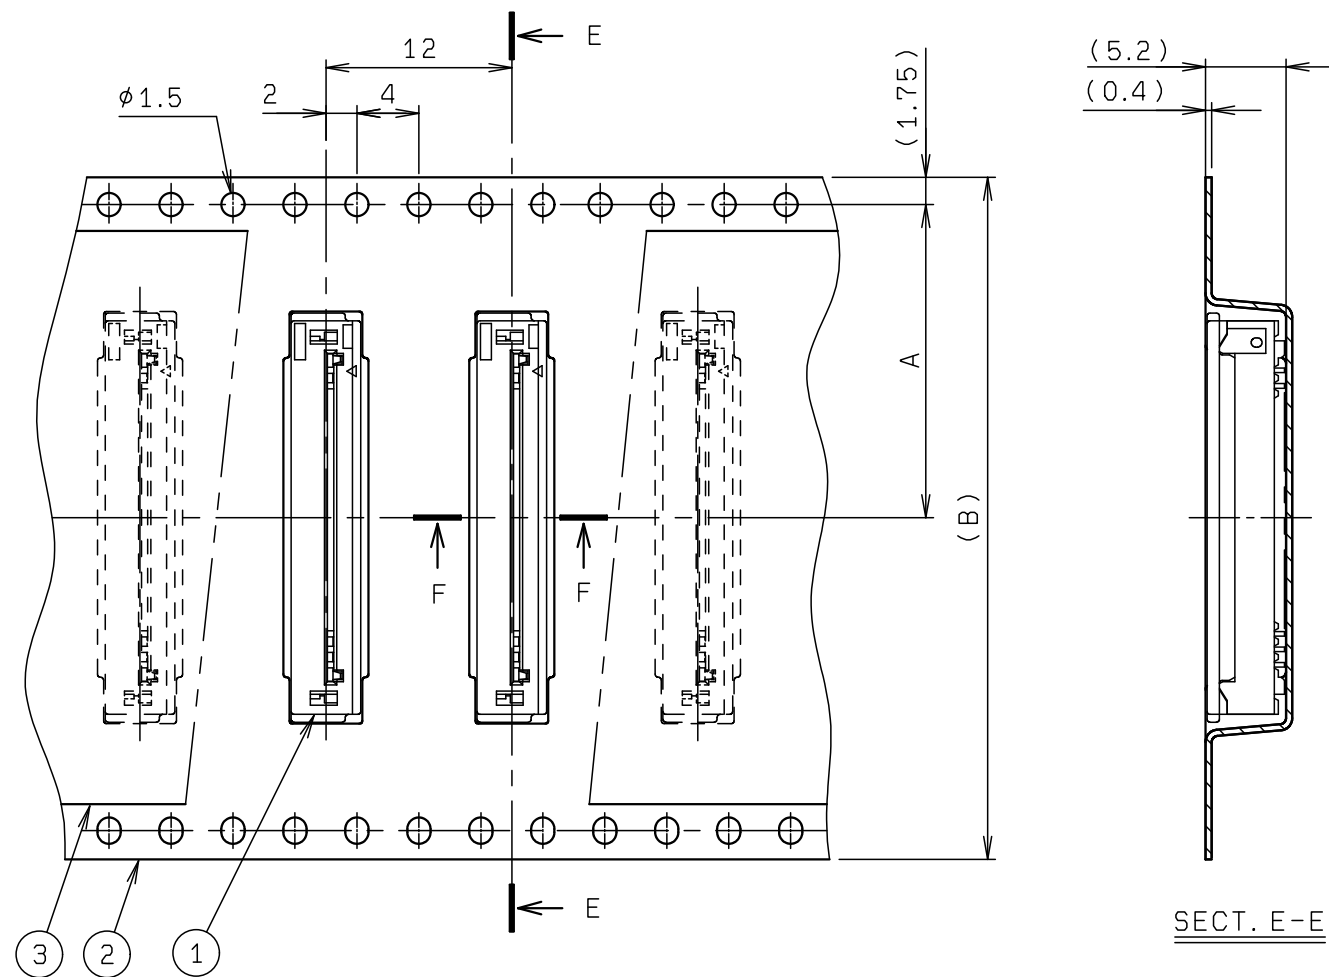

ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS


| NO. | DESCRIPTION    | PART NO.                | QTY  | MATERIAL    | DRW NO. | REMARKS                 |
|-----|----------------|-------------------------|------|-------------|---------|-------------------------|
| 1   | CONNECTOR      | 00 6208 5XX X10 000 / + | 1000 |             |         | 00 6208 500 0XX 000 / + |
| 2   | EMBOSSSED TAPE |                         | 1    | POLYSTYRENE |         |                         |
| 3   | TOP COVER TAPE |                         | 1    | POLYSTYRENE |         |                         |
| 4   | REEL           |                         | 1    | POLYSTYRENE |         |                         |

| 極 数<br>NO. OF<br>POS. | A    | B    | C    |
|-----------------------|------|------|------|
| 5                     | 11.5 | 24.0 | 30.4 |
| 6                     | 11.5 | 24.0 | 30.4 |
| 7                     | 11.5 | 24.0 | 30.4 |
| 8                     | 11.5 | 24.0 | 30.4 |
| 9                     | 11.5 | 24.0 | 30.4 |
| 10                    | 11.5 | 24.0 | 30.4 |
| 11                    | 14.2 | 32.0 | 38.4 |
| 12                    | 14.2 | 32.0 | 38.4 |
| 13                    | 14.2 | 32.0 | 38.4 |
| 14                    | 14.2 | 32.0 | 38.4 |
| 15                    | 14.2 | 32.0 | 38.4 |
| 16                    | 14.2 | 32.0 | 38.4 |
| 17                    | 20.2 | 44.0 | 50.4 |
| 18                    | 20.2 | 44.0 | 50.4 |
| 19                    | 20.2 | 44.0 | 50.4 |
| 20                    | 20.2 | 44.0 | 50.4 |
| 21                    | 20.2 | 44.0 | 50.4 |
| 22                    | 20.2 | 44.0 | 50.4 |
| 23                    | 20.2 | 44.0 | 50.4 |
| 24                    | 20.2 | 44.0 | 50.4 |
| 25                    | 20.2 | 44.0 | 50.4 |
| 26                    | 20.2 | 44.0 | 50.4 |
| 30                    | 26.2 | 56.0 | 62.4 |


注 記  
NOTE

1. 梱包数量 : 1000 個/リール  
PACKING QUANTITY : 1000 ea/reel

2. 納入時のリール巻き方向  
DIRECTION OF REEL

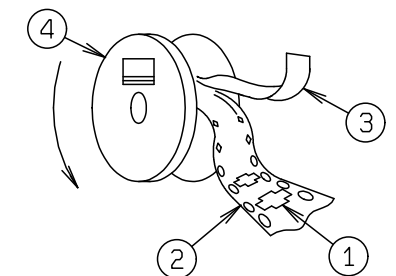

3. 引出し方向  
USER DIRECTION OF FEED

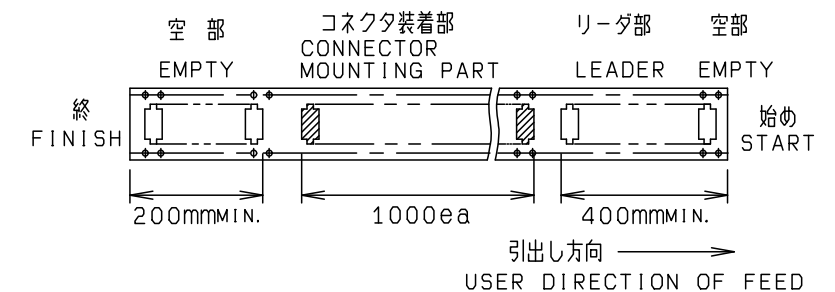

4. 型 番  
P/N 00 6208 5XX X10 000 / +

極 数  
NO. OF POS.

テープ幅  
TAPE WIDTH

1: 24mm  
2: 32mm  
3: 44mm  
4: 56mm

※この注記の1~3は3ページ目にも適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO  
SHEET-3 ONLY.

|                                                                                       |  |                       |  |                             |  |                      |         |                                                |       |         |          |
|---------------------------------------------------------------------------------------|--|-----------------------|--|-----------------------------|--|----------------------|---------|------------------------------------------------|-------|---------|----------|
| TOLERANCE / 一般公差 (S)                                                                  |  | PRODUCT SPEC / 製品規格   |  |                             |  |                      |         |                                                |       |         |          |
| X <10 ±0.2                                                                            |  | UNIT<br>mm            |  | ANGLE<br>3RD                |  | REFER TO SHEET 1/3   |         |                                                |       |         |          |
| 10≦ X <30 ±0.25                                                                       |  |                       |  |                             |  |                      |         |                                                |       |         |          |
| 30≦ X ±0.3                                                                            |  |                       |  |                             |  |                      |         |                                                |       |         |          |
| ANGLE / 角度<br>±3°                                                                     |  | SCALE<br>2 : 1        |  | DATE<br>2016/07/14          |  | NO.                  | EDN/DCN | DATE                                           | ISSUE | CHECKED | APPROVED |
| DRAWN<br>M. TAKAHASHI                                                                 |  | DESIGNED<br>R. MAKABE |  | CHECKED<br>N. KITAGAWA      |  | APPROVED<br>Y. FUJII |         | PART NAME / 品名<br>SERIES 6208 EMBOSS TAPE ASSY |       |         |          |
|                                                                                       |  |                       |  |                             |  |                      |         | PART NO. / 型番<br>00 6208 5XX X10 000 / +       |       |         |          |
|  |  | KYOCERA Corporation   |  | DWG NO. / 図番<br>BUS 6208229 |  |                      |         | SHEET/REV<br>1/3 B                             |       |         |          |