


Specifications:


Contact rating:	12 V DC, 50 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	– 40° to + 85° C
Electrical life:	1,0 N/1,6 N: minimum 200 000 cycles 2,6 N: minimum 100 000 cycles 3,2 N/5,2 N: minimum 50 000 cycles
Operating force:	see ordering code
Contacts:	phosphor bronze, silver-plated
Terminals:	brass, silver-plated
Material:	cover: stainless steel base and stem: nylon meets UL 94 V-0; caps ABS
Mounting:	on pc-board – SMD
Soldering conditions:	hand-soldering – max.: 30 W, 2 sec, 320° C
Travel:	0,25 mm + 0,2/– 0,1 mm

Models:


TSS 6 ☐ ☐

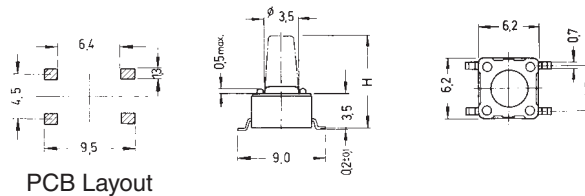

TSS 644 ☐

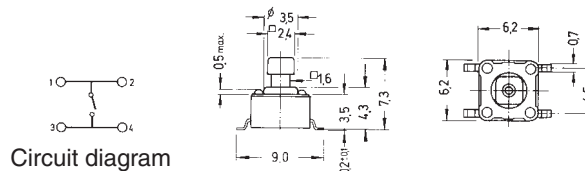

Caps for TSS 644 ☐

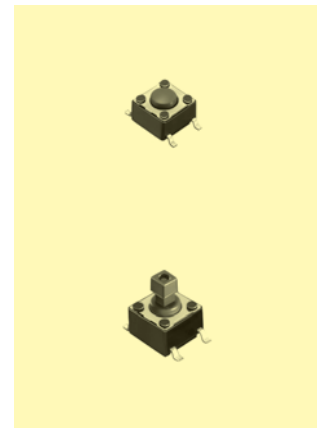

Ordering code:

Switches

TSS 6 ☐ ☐

Dimension H/Packing:

- ① 4,3 mm / 1000 pcs/reel
- ② 5,0 mm / 900 pcs/reel
- ③ 7,0 mm / 700 pcs/reel
- ④ 7,3 mm / 500 pcs/reel*
- ⑤ 9,5 mm / 380 pcs/reel
- ⑥ 13,0 mm / 77 pcs/tube
200 pcs/reel

Colour of stem
for operating force:

- Ⓚ 1,0 N, black
- Ⓝ 1,6 N, brown
- Ⓡ 2,6 N, red
- Ⓢ 3,2 N, salmon
- Ⓨ 5,2 N, yellow

* only with square stem

Caps KTSC-6 ☐ ☐

Cap type:

- ① square
- ② round

Cap colour:

- Ⓨ yellow
- Ⓟ blue
- Ⓡ red
- Ⓛ ivory
- Ⓚ black
- ⓐ green