

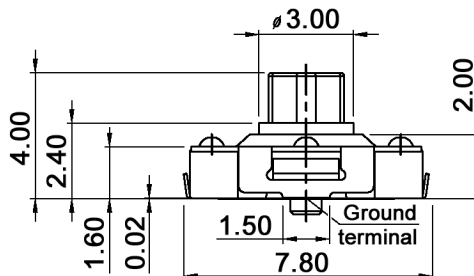

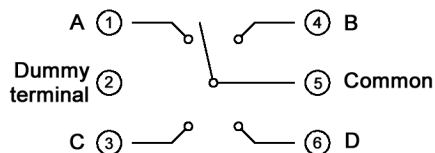




CIRCUIT DIAGRAM

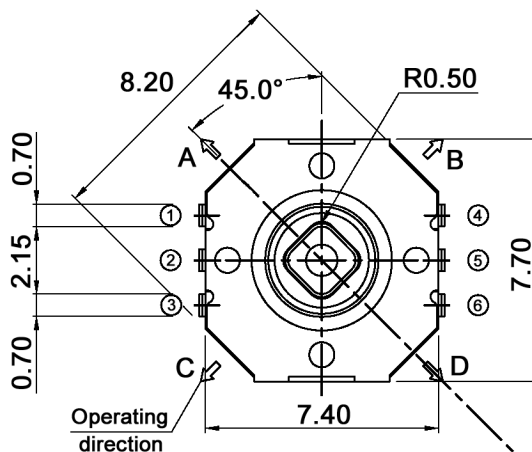

1.40 max.
Fitting margin
for key top

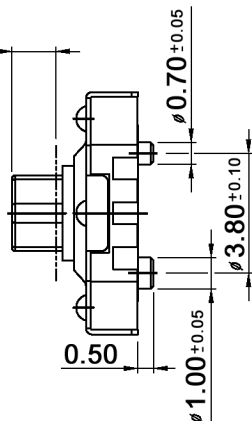

P.C.B. LAYOUT

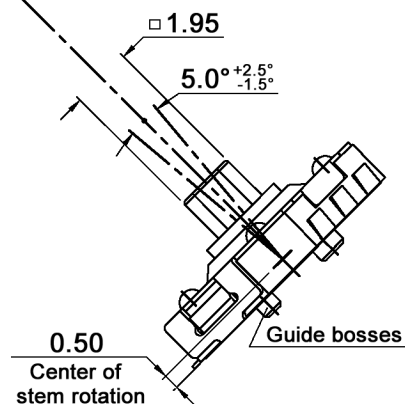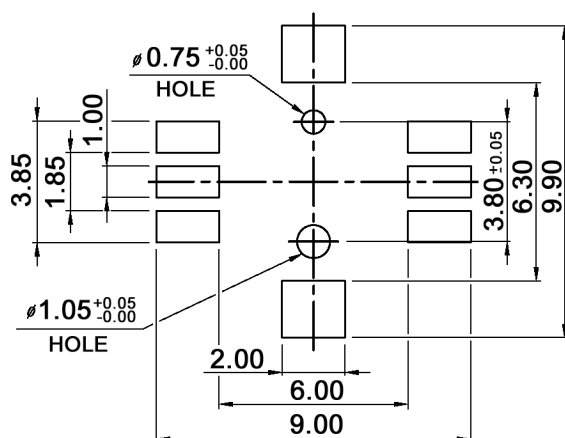

Tolerances:			Date	Name	TSSJ 4-J	
			09/05	dr		
					30 06 97	
					Page	
RoHS compliant	10/10	dr	knitter-switch			1/2
Modifications	Date	Name				

Specifications:

Contact rating: 50mA, 12V DC
Contact resistance: 100mOhm max.
Insulation resistance: 100MOhm min.
Dielectric strength: 250V AC (50 or 60 Hz) for 1 minute
Operating temperature: -20°C to +70°C
Storage temperature: -40°C to +85°C
Operating force: 4 directions: 160 +/-50g
Mechanical life: 100 000 cycles min.
Soldering temperature: peak 255°C / max. 10sec., >250°C
Material: Cover: C7701RH
Stem: high-temp. thermoplastic LCP
Contact: SUS301CSP-EH
Termianl: C5210R-H, with silver plated
Base: high-temp. thermoplastic LCP, black



Tolerances:			Date	Name	TSSJ 4-J	
			09/05	dr		
			knitter-switch		30 06 97	Page
						2/2
Modifications	Date	Name				